


NOTE: DIG HOLE THREE TIMES THE WIDTH AND AS DEEP AS ROOTBALL, EXCEPT WHERE NOTED.

CONIFEROUS TREE PLANTING


SCALE: NOT TO SCALE

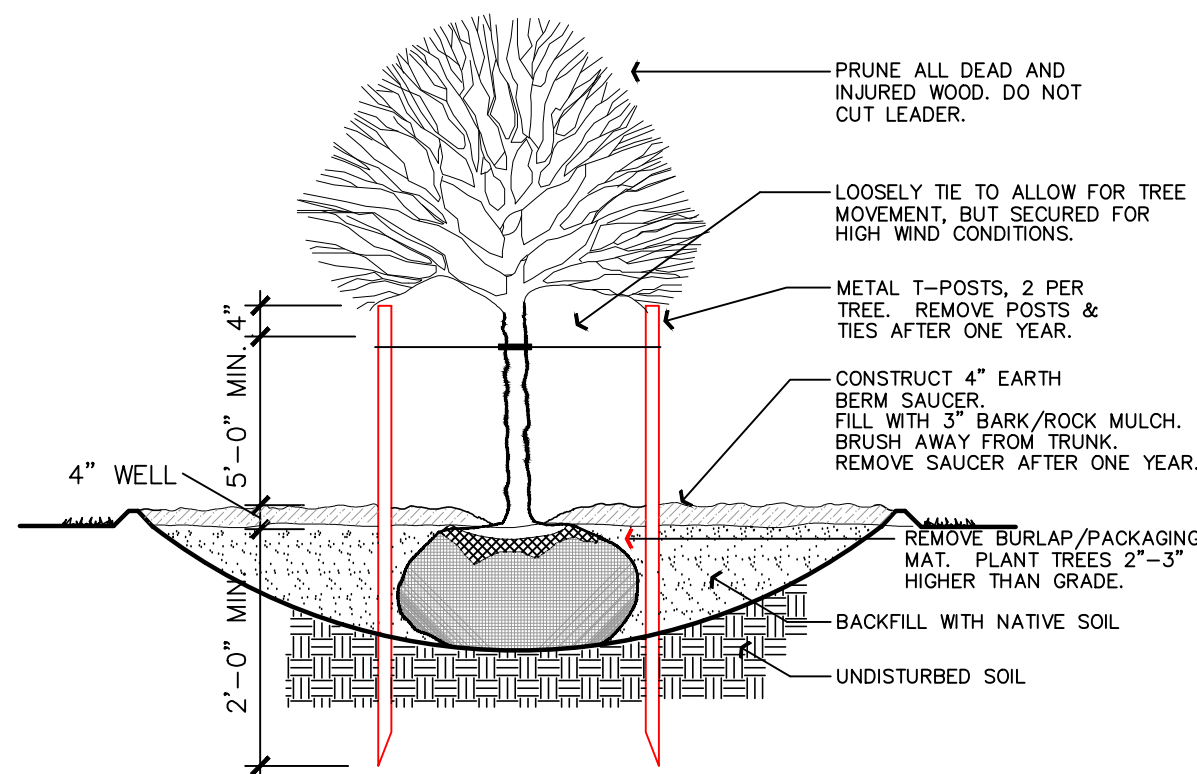

NOTE: DIG HOLE THREE TIMES THE WIDTH AND AS DEEP AS ROOTBALL, EXCEPT WHERE NOTED.

DECIDUOUS TREE PLANTING


SCALE: NOT TO SCALE

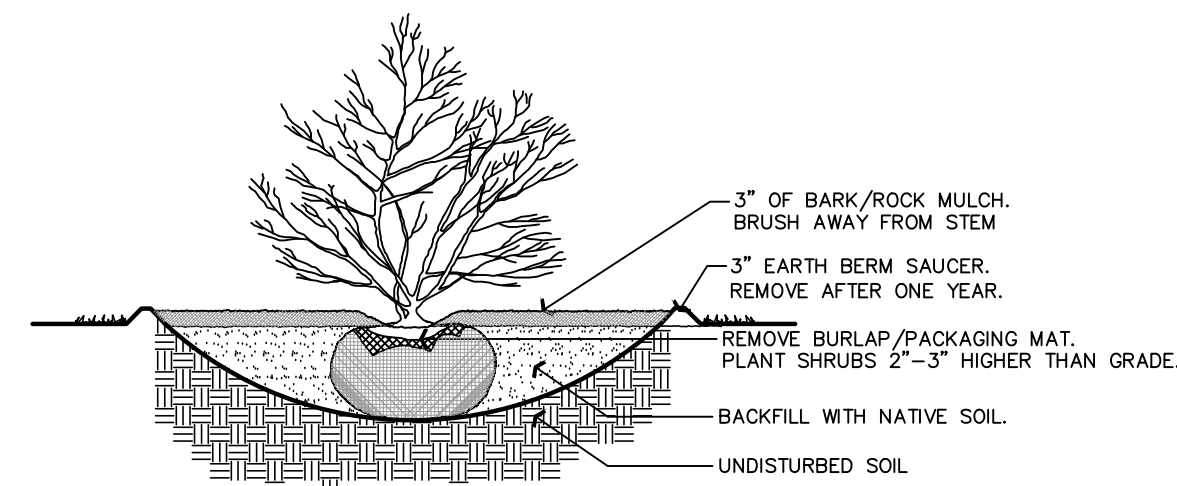

NOTE: DIG HOLE THREE TIMES THE WIDTH AND AS DEEP AS ROOTBALL, EXCEPT WHERE NOTED.


SHRUB PLANTING

SCALE: NOT TO SCALE

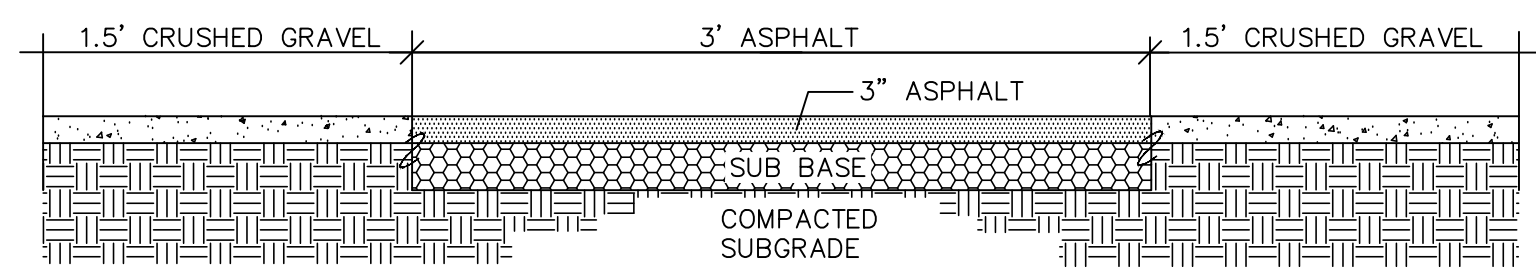


6' WIDE ASPHALT/GRAVEL PATH

N.T.S.

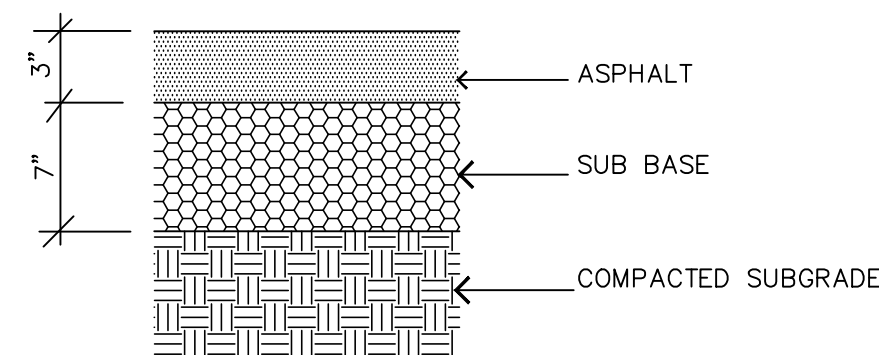


ASPHALT PAVING SECTION

N.T.S.

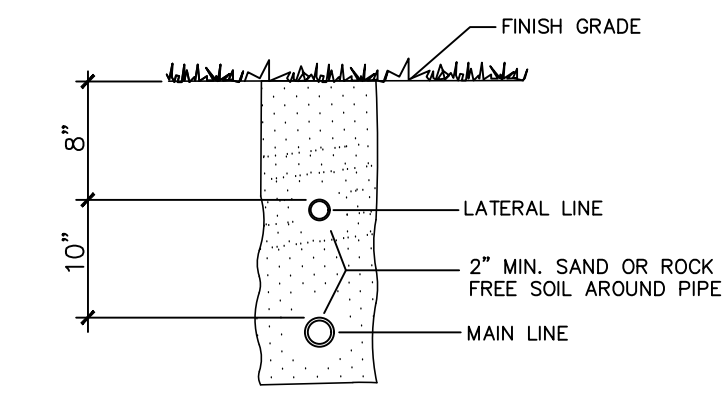

TRENCH SECTION


N.T.S.

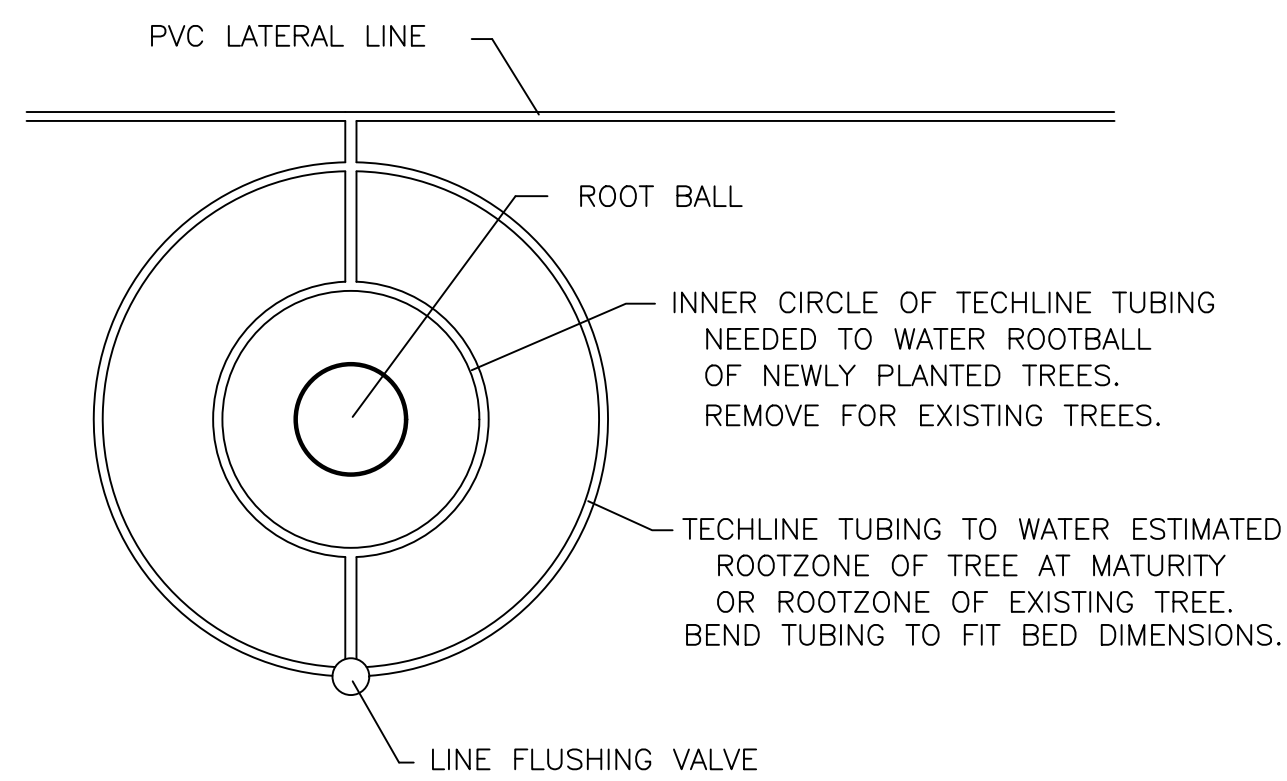

USE FITTINGS AS SPECIFIED BY NETAFIM DESIGN GUIDE. PLACE TECHLINE ON SOIL SURFACE, THEN COVER WITH WEED BARRIER CLOTH AND 4" GRAVEL MULCH.

NETAFIM DETAIL


SCALE: NTS

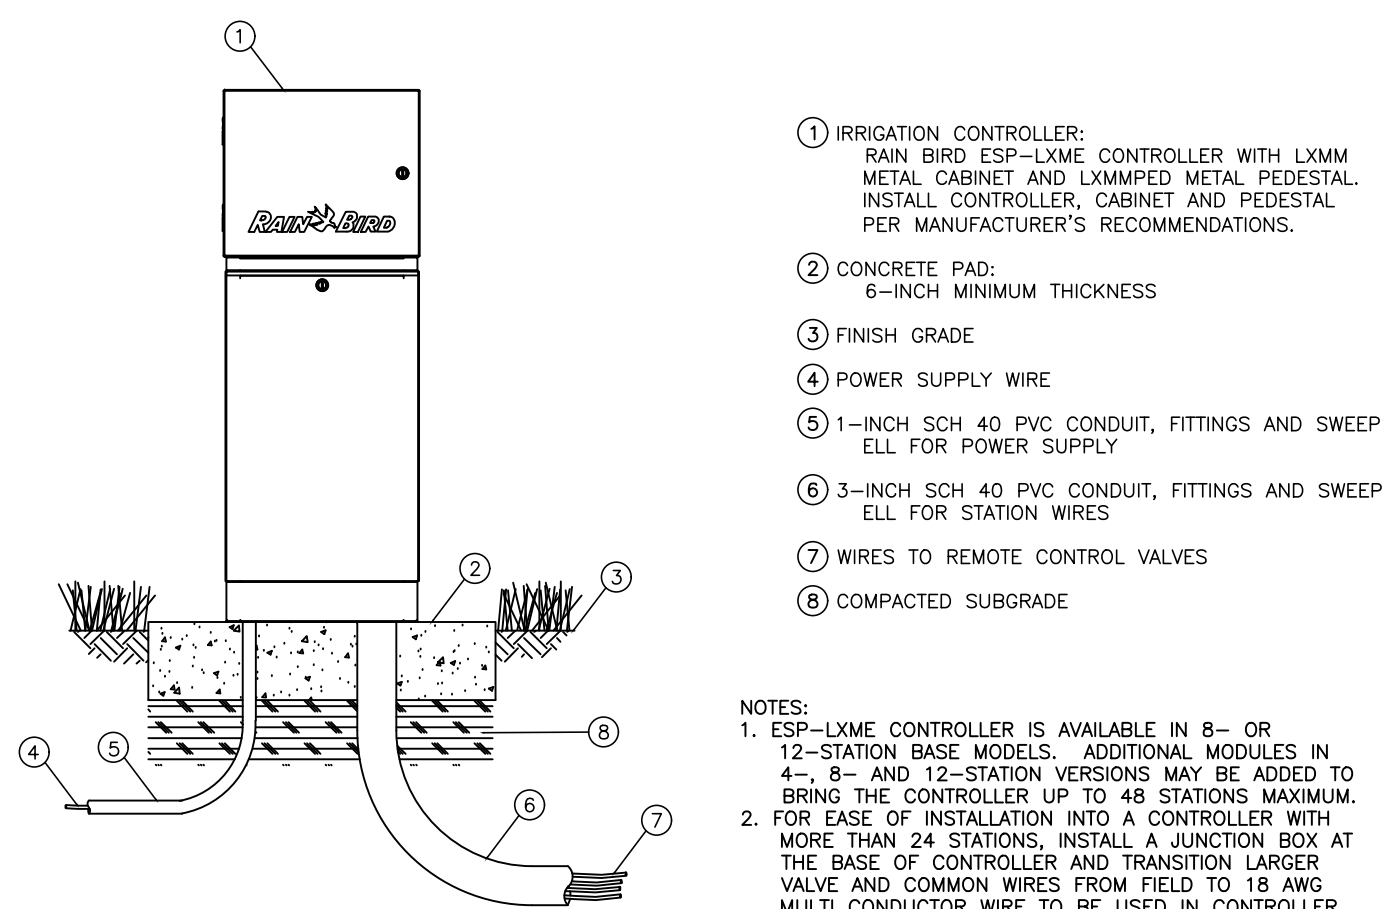

NOTES:
1. ESP-LXME CONTROLLER IS AVAILABLE IN 8- OR 12-STATION BASE MODELS. ADDITIONAL MODULES IN 4-, 8- AND 12-STATION VERSIONS MAY BE ADDED TO BRING THE CONTROLLER UP TO 48 STATIONS MAXIMUM.
2. FOR EASE OF INSTALLATION INTO A CONTROLLER WITH MORE THAN 24 STATIONS, INSTALL A JUNCTION BOX AT THE BASE OF CONTROLLER AND TRANSITION LARGER VALVE AND COMMON WIRES FROM FIELD TO 18 AWG MULTI CONDUCTOR WIRE TO BE USED IN CONTROLLER.
3. PROVIDE PROPER GROUNDING COMPONENTS TO ACHIEVE GROUND RESISTANCE OF 10 OHMS OR LESS.

ESP-LXME CONTROLLER

N.T.S. IN METAL PEDESTAL FOR OUTSIDE MOUNT

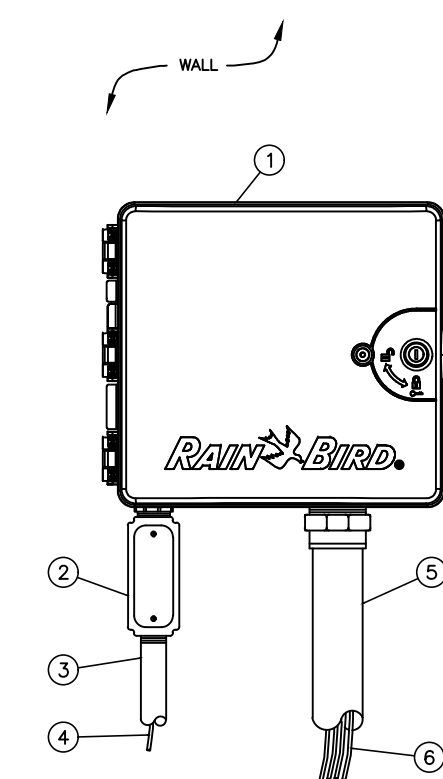

1 IRRIGATION CONTROLLER: RAIN BIRD ESP-LXME CONTROLLER IN PLASTIC CABINET WITH WALL MOUNT. INSTALL CONTROLLER AND CABINET ON WALL PER MANUFACTURER'S RECOMMENDATIONS.

2 JUNCTION BOX

3 1-INCH CONDUIT AND FITTINGS TO POWER SUPPLY

4 POWER SUPPLY WIRE

5 2-INCH CONDUIT AND FITTINGS FOR STATION WIRES

6 WIRES TO REMOTE CONTROL VALVES

NOTES:
1. ESP-LXME CONTROLLER IS AVAILABLE IN 8- OR 12-STATION BASE MODELS. ADDITIONAL MODULES IN 4-, 8- AND 12-STATION VERSIONS MAY BE ADDED TO BRING THE CONTROLLER UP TO 48 STATIONS MAXIMUM.
2. FOR EASE OF INSTALLATION INTO A CONTROLLER WITH MORE THAN 24 STATIONS, INSTALL A JUNCTION BOX AT THE BASE OF CONTROLLER AND TRANSITION LARGER VALVE AND COMMON WIRES FROM FIELD TO 18 AWG MULTI CONDUCTOR WIRE TO BE USED IN CONTROLLER.
3. USE STEEL CONDUIT FOR ABOVE GRADE AND SCH 40 PVC CONDUIT FOR BELOW GRADE CONDITIONS.
3. PROVIDE PROPER GROUNDING COMPONENTS TO ACHIEVE GROUND RESISTANCE OF 10 OHMS OR LESS.

ESP-LXME CONTROLLER

N.T.S. IN PLASTIC CABINET FOR OUTSIDE MOUNT

REVISIONS	DESCRIPTION

Project Info.

Engineer: J. NATE REEVE

Drafter: C. KINGSLEY

Begin Date: 4-4-16

Name: REESE STATION

SUBDIVISION

PHASE 1

Number: 6352-01

Developer Contact:
Barrow Land Livestock, LLC
Dean & Justin Barrow
6835 W. 900 S
Ogden, UT, 84404
(801) 514-8194