Terakee Meadows Subdivision

A part of the Northwest Quarter of Section 21, T6N, R2W, SLB&M, U.S. Survey
Weber County, Utah

December 2018

NARRATIVE

This Subdivision Plat was requested by Mr. Brad Blanch for the purpose of creating twelve (12) residential Lots and five (5) Open Space Parcels.

Brass Cap Monuments were found at the Northeast Corner and the North Quarter Corner of Section 21, T6N, R2W, SLB&M.

A line bearing North 89°05'07" West between these two monuments was used as the Basis of Bearings.

Property Corners were monumented as depicted on this plat.

If Curb and Gutter is installed, Rivets will be set in the Top Back of Curb on the extension of the Property Line.

If Curb and Gutter is deferred, the front Property Corners will be required to have Rebar and Cap set.

NOTES

1. Subdivision will be connected to Central Weber Sanitary Sewer via 900 South design previously submitted with Terakee Village PRUD.

2. 50.0' Private Right of Way to be maintained by Terakee Meadows Home Owners

3. Recommendations on the Geotech Report shall be followed during construction of

4. Private Roads shall have a 41.0' Temporary Turnaround Easement at the end of each street during the construction of each Phase.

5. Fire Flow for Subdivision shall be 1000 GPM.
6. A temporary address marker shall be required at the building site during construction.

7. Any Fire Access roads to any property shall have a minimum clear width of 20 feet (face of curb to face of curb) and a vertical clearance of 13 foot 6 inches and shall be capable of supporting a 75,000 pound load. Roads that are less than 26 feet in width shall be posted with "NO PARKING FIRE LANE" on both sides of the roadway. Roads more than 26 but less than 32 feet in width shall be posted on one side of the roadway. (Roadways and signage shall comply with appendix D of the 2015 International Fire Code as adopted by Weber Fire District).

8. Roads shall have a maximum grade of 10% unless specifically approved as outlined in the International Fire Code.

9. Roads and bridges shall be designed, constructed and maintained to support an imposed load of 75,000 lbs.

10. Fire access roads for this project shall be completed and approved prior to any combustible construction. Temporary roads shall meet the same requirements for height, width and imposed loads as permanent roads.

11. All required fire hydrants and water systems shall be installed, approved and fully functional prior to any combustible material construction.

12. The owner shall designate a person to be the fire prevention program superintendent who shall be responsible for the fire prevention program and ensure that it is carried out through completion of the project. The fire prevention program superintendent shall have the authority to enforce the provisions of this chapter and other provisions as necessary to secure the intent of this chapter. Where Guard service is provided, the superintendent shall be responsible for the guard service. The fire prevention program superintendent shall develop and maintain an approved prefire plan in cooperation with the fire chief. The fire chief and the fire code official shall be notified of changes affecting the utilization of information contained in such prefire plans. (see IFC 3308)

13. All roads shall be designed, constructed, surfaced and maintained so as to provide an all—weather driving surface.

14. Fire department apparatus access is required for each lot.

AGRICULTURAL NOTE

Agriculture is the preferred use in the agriculture zones. Agricultural operations as specified in the Land Use Code for a particular zone are permitted at any time including the operation of farm machinery and no allowed agricultural use shall be subject to restrictions on the basis that it interferes with activities of future residents of this subdivision.

WEBER COUNTY ENGINEER

Weber County Engineer

GREAT BASIN OF ENGINEERING

5746 SOUTH 1475 EAST OGDEN, UTAH 84403

WEBER COUNTY PLANNING COMMISSION APPROVAL

Is this still going to be Private?? 60ft.

This is to certify that this subdivision plat was duly approved by the Weber County Planning Commission.

Signed this _____ day of _____

Chairman, Weber County Planning Comission

WEBER COUNTY COMMISSION ACCEPTANCE

This is to certify that this subdivision plat, the dedication of streets and other public ways and financial guarantee of public improvements associated with this subdivision, thereon are hereby approved and accepted by the Commissioners of Weber County, Utah. Signed this _____ day of _____, 2018.

	Chairman,	Weber	County	Comission	
ttes	<i>t:</i>				
itle:					
1110.					

TAYLOR WEST WEBER WATER

This is to certify that this subdivision plat was duly approved by Taylor West Weber Water.

Signed this _____ day of _____, 2018.

Taylor West Weber Water

HOOPER WATER IMPROVEMENT DISTRICT

This is to certify that this subdivision plat was duly approved by Hooper Water Improvement District.

Signed this _____ day of ______, 2018.

Hooper Water Improvement District

W 950-N A 900-P W 100-S A 900-S A 9

VICINITY MAP

Not to Scale

DESCRIPTION

A part of the Northwest Quarter of Section 21, Township 6 North, Range 2 West, Salt Lake Base and Meridian, U.S. Survey, Weber County, Utah:

Beginning at the Northwest Corner of said Section 21, said point being the Easterly Right of Way Line of 4300 West Street; and running thence South 89°15'32" East (East Record) 1055.51 feet (1056 feet Record); thence due South 538.10 feet (551.76' Record); thence due West 1056.00 feet to said Easterly Right of Way Line; thence North 0°03'37" East (North Record) 551.75 feet (551.76 feet Record) along said Easterly Right of Way Line to the Northwest Corner of said Section 21 and the Point of Beginning.

Contains 575,286 Sq. Ft. or 13.207 Acres

Signed this ______ Day of _______, 2018.

SURVEYOR'S CERTIFICATE

Utah, and that I hold Certificate No. 6242920 in accordance with Title 58, Chapter 22, of the Professional Engineers and Land Surveyors Licensing Act. I also certify that I have completed a

survey of the property described hereon In accordance with Section 17-23-17 and that I have

representation of the following description of lands included in said subdivision, based on data compiled from records in the Weber County Recorder's Office. Monuments have been found or

hereby meet all current lot width and area requirements of the Weber County Zoning Ordinance.

Andy Hubbard

Utah and that it has been correctly drawn to the designated scale and is a true and correct

placed as represented on this plat. I furthermore certify that all lots within this Subdivision

Signed this _____, day of ______, 2018.

6242920

structures being erected within such easements.

verified all measurements shown hereon this plat of Terakee Meadows Subdivision in Weber County,

I, Andy Hubbard, do hereby certify that I am a Professional Land Surveyor in the State of

- X X - Title

OWNERS DEDICATION

We the undersigned owners of the herein described tract of land, do hereby set apart and

subdivide the same into lots as shown on the plat and name said tract Terakee Meadows

Subdivision and do hereby dedicate and grant to Weber County a perpetual right and easement

over, upon and under the lands designated hereon as public utility easements, the same to be

whichever is applicable as may be authorized by the governing authority, with no buildings or

used for the maintenance and operation of public utility service line and storm drainage facilities,

ACKNOWLEDGMENT

State of Utah County of

The	foregoing	instrument	was	acknowledged	before	me	this	day	of
		_ 2018 by ₋	X					·	

Residing At:
Commission Number:
Commission Expires:

Print Name

A Notary Public commissioned in Utah

WEBER COUNTY ATTORNEY

I have examined the financial guarantee and other documents associated with this subdivision plat, and in my opinion they conform with the County Ordinance applicable thereto and now in force and affect.

Signed this _____ day of _____, 2018.

Weber County Attorney

WEBER COUNTY SURVEYOR

I hereby certify that the Weber County Surveyor's Office has reviewed this plat for mathematical correctness, section corner data, and for harmony with lines and monument on record in County Offices. The approval of this plat by the Weber County Surveyor does not relieve the licensed Land Surveyor who executed this plat from the responsibilities and/or liabilities associated therewith.

Signed this _____ day of ______, 2018.

Weber County Surveyor

WEBER COUNTY RECORDER

ENTRY NO. _____FEE PAID
_____FILED FOR RECORD AND
RECORDED_____, AT
____IN BOOK_____OF OFFICIAL
RECORDS, PAGE______. RECORDED
FOR_____

Sheet 1 of 2


16N719 - Terakee Meadows

W:\16N719 TERAKEE VILLAGE\Dwgs\Terakee Meadows\16N719 - AP.dwg, 12/11/2018 12:36:06 PM, JFelt, 1:1

Terakee Meadows Subdivision


A part of the Northwest Quarter of Section 21, T6N, R2W, SLB&M, U.S. Survey
Weber County, Utah

December 2018

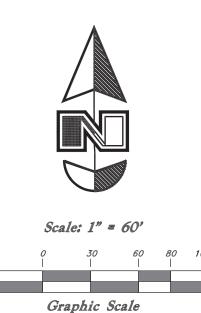

AGRICULTURAL NOTE

Agriculture is the preferred use in the agriculture zones. Agricultural operations as specified in the Land Use Code for a particular zone are permitted at any time including the operation of farm machinery and no allowed agricultural use shall be subject to restrictions on the basis that it interferes with activities of future residents of this subdivision.

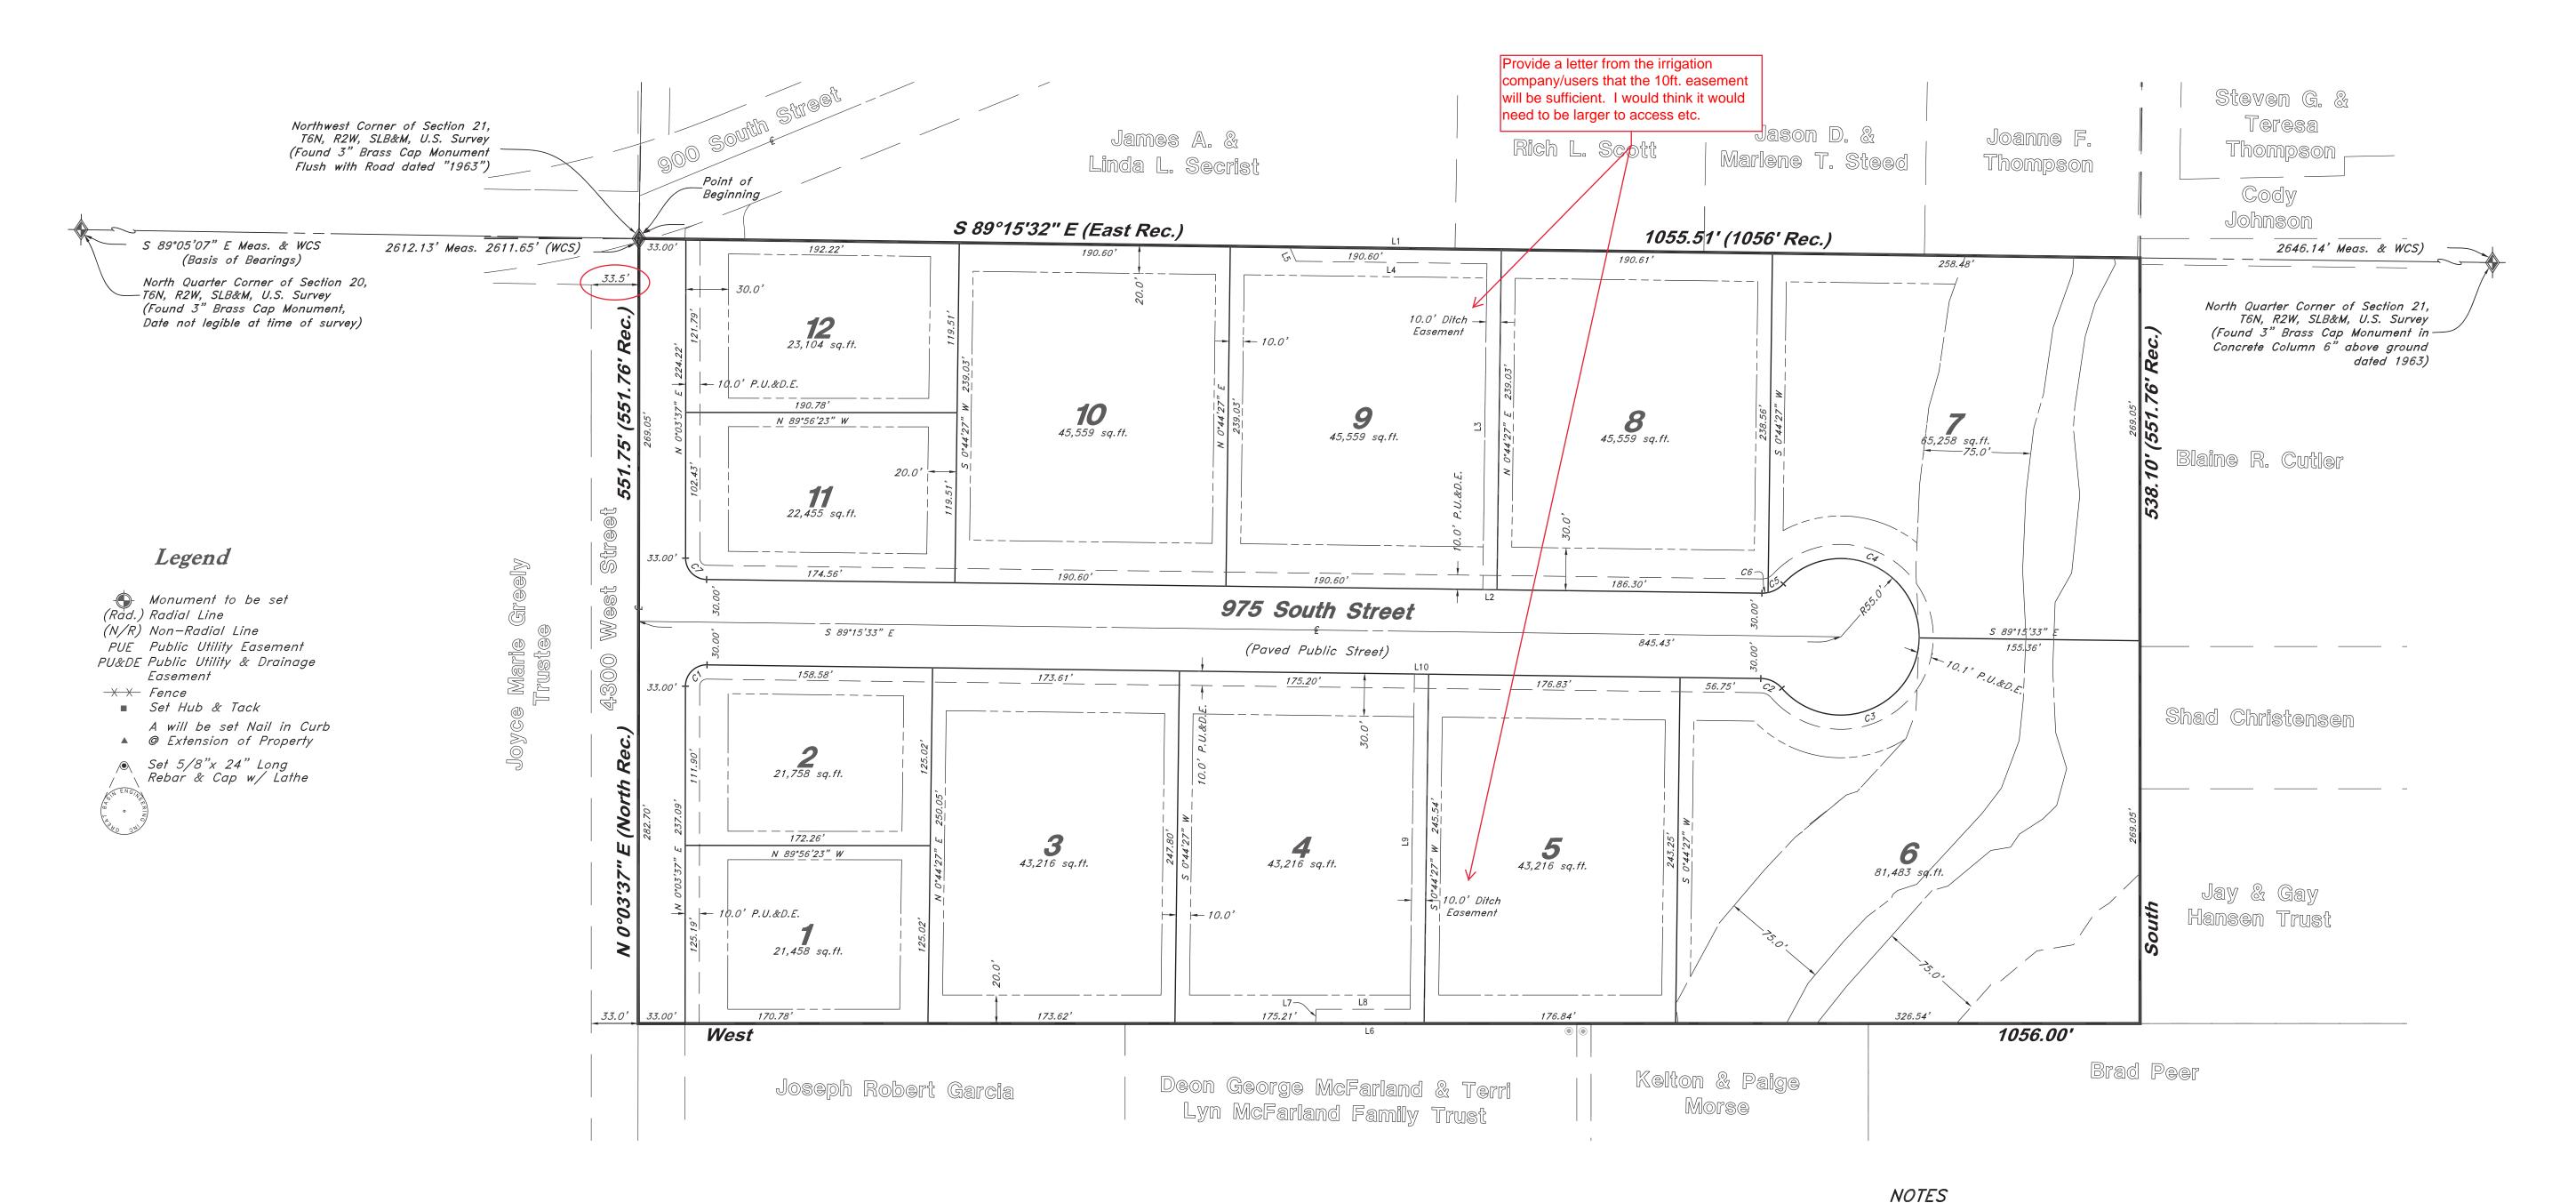

		Property	/ line Cu	rve Data	
Curve #	Delta	Radius	Length	Chord Direction	Chord Length
C1	90°40'50"	15.00'	23.74'	S 45°24'03" W	21.34'
C2	48°15'59"	20.00'	16.85	N 65°12'09" W	16.35
C3	138°11'23"	55.00'	132.65	S 69°50'08" W	102.76
C4	138°11'23"	55.00'	132.65	S 68°21'14" E	102.76
C5	35°45'37"	20.00'	12.48'	N 60°25'53" E	12.28'
C6	12°25'46"	20.00'	4.34'	N 84°31'34" E	4.33
<i>C7</i>	89°19'10"	15.00'	23.38'	S 44°35′58″ E	21.09'

- 1. Subdivision will be connected to Central Weber Sanitary Sewer via 900 South design previously submitted with Terakee Village PRUD.
- 2. 50.0' Private Right of Way to be maintained by Terakee Meadows Home Owners Association.
- 3. Recommendations on the Geotech Report shall be followed during construction of this site.
- 4. Private Roads shall have a 41.0' Temporary Turnaround Easement at the end of each street during the construction of each Phase.
- 5. Fire Flow for Subdivision shall be 1000 GPM.
- 6. A temporary address marker shall be required at the building site during construction.
- 7. Any Fire Access roads to any property shall have a minimum clear width of 20 feet (face of curb to face of curb) and a vertical clearance of 13 foot 6 inches and shall be capable of supporting a 75,000 pound load. Roads that are less than 26 feet in width shall be posted with "NO PARKING FIRE LANE" on both sides of the roadway. Roads more than 26 but less than 32 feet in width shall be posted on one side of the roadway. (Roadways and signage shall comply with appendix D of the 2015 International Fire Code as adopted by Weber Fire District).
- 8. Roads shall have a maximum grade of 10% unless specifically approved as outlined in the International Fire Code. 9. Roads and bridges shall be designed, constructed and maintained to support an imposed load of 75,000 lbs.
- 10. Fire access roads for this project shall be completed and approved prior to any combustible construction. Temporary roads shall meet the same requirements for height, width and imposed loads as permanent roads.
- requirements for neight, wiath and imposed loads as permanent rodas.

 11. All required fire hydrants and water systems shall be installed, approved and fully functional prior to any combustible material construction.

 12. The owner shall designate a person to be the fire prevention program superintendent who shall be responsible for the fire prevention program
- and ensure that it is carried out through completion of the project. The fire prevention program superintendent shall have the authority to enforce the provisions of this chapter and other provisions as necessary to secure the intent of this chapter. Where Guard service is provided, the superintendent shall be responsible for the guard service. The fire prevention program superintendent shall develop and maintain an approved prefire plan in cooperation with the fire chief. The fire chief and the fire code official shall be notified of changes affecting the utilization of information contained in such prefire plans. (see IFC 3308)
- 13. All roads shall be designed, constructed, surfaced and maintained so as to provide an all—weather driving surface.
- 14. Fire department apparatus access is required for each lot.


Sheet 2 of 2
WEBER COUNTY RECORDER
ENTRY NOFEE PAID
FILED FOR RECORD AND RECORDED, AT
IN BOOK OF OFFICIAL
RECORDS, PAGE RECORDED FOR
WEBER COUNTY RECORDER
BY:
DEPUTY DEPUTY
16N719 — Terakee Meadows


GREAT BASIN O ENGINEERING Z

5746 SOUTH 1475 EAST OGDEN, UTAH 84403 MAIN (801)394-4515 S.L.C (801)521-0222 FAX (801)392-7544 W W W . G R E A T B A S I N E N G I N E E R I N G . C O M

Terakee Meadows Subdivision

A part of the Northwest Quarter of Section 21, T6N, R2W, SLB&M, U.S. Survey Weber County, Utah December 2018

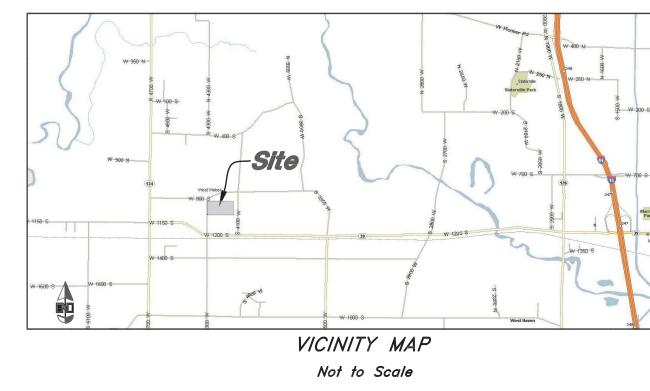

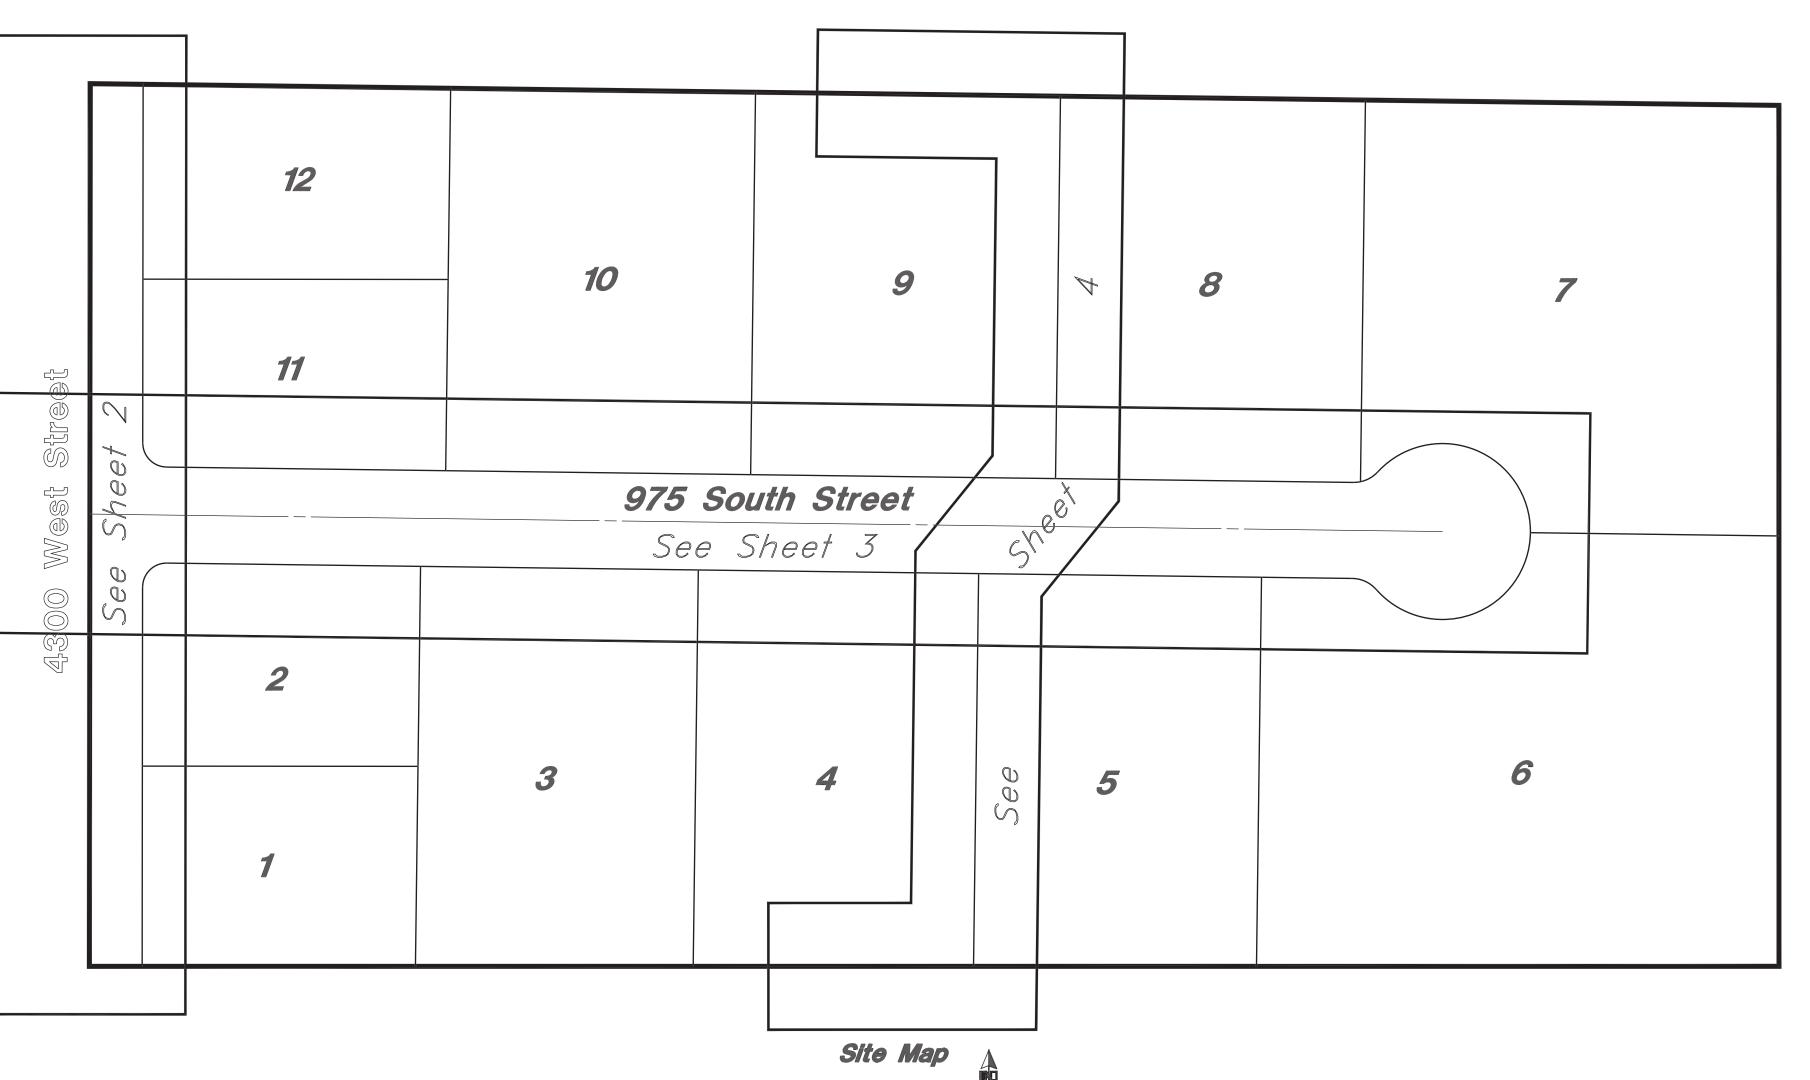



San. Sewer Manhole Water Manhole Storm Drain Manhole Cleanout Electrical Manhole Catch Basins Exist. Fire Hydrant Exist. Water Valve Water Valve Sanitary Sewer Culinary Water Gas Line Irrigation Line Storm Drain Telephone Line Secondary Waterline Power Line Fire Line Land Drain Power pole Power pole w/guy Light Pole Flowline of ditch Overhead Power line Corrugated Metal Pipe Concrete Pipe Reinforced Concrete Pipe Edge of Asphalt Centerline Flowline Finish Floor Top of Wall Top of Walk Top of Concrete Natural Ground Finish Grade Match Existing Fire Department Connection Finish Contour Finish Grade Ridge Line Existing Asphalt

—/W— —SD— — T— —SW— — P—

INC

— 90— **95.33TA** 95.72TA — R — New Asphalt

Heavy Duty Asphalt Existing Concrete

New Concrete

Spill Curb & Gutter

/larking tape marking the utility, sewer to be bedded with grave


CAUTION NOTICE TO CONTRACTOR

PRIVATE ENGINEER'S NOTICE TO CONTRACTORS The Contractor agrees that he shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property: that this requirement shall apply continuously and not be limited to normal working hours; and that the contractor shall defend, indemnify, and hold the owner and the engineer harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting for liability arising from the sole

Curb&Gutter are

required unless a

deferral is granted.

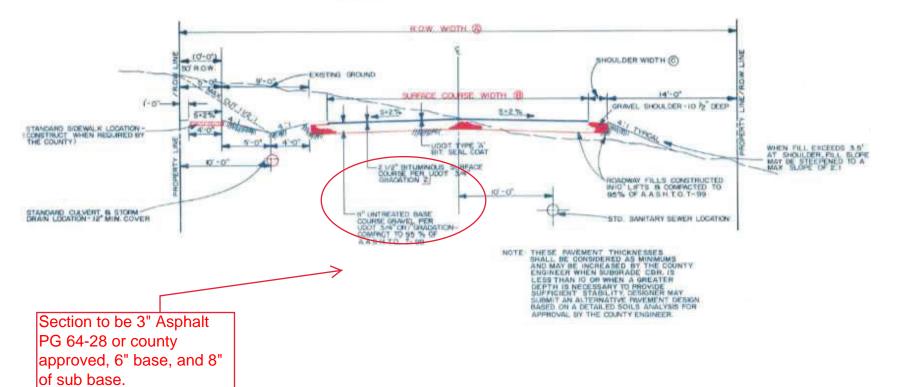

STREET DESIGNATION	R.O.W. WIDTH (A)	SURFACE COURSE WIDTH (B)	SHOULDER WIDTH (C)
MINOR AND/OR PRIVATE ROADWAYS	50	24'	4'
STANDARD RESIDENTIAL	eo'	24 [↑]	4"
COLLECTOR	66'	28'	5
MINOR ARTERIAL	80'	44' (30') 3	4 3
2 MAJOR ARTERIAL	IOC/ (CONSULT	COUNTY ENGINEER FOR SPECIFIC	REQUIREMENTS)

2 COUNTY ENGINEER SHALL PROVIDE PROVEMENT DESIGN ON ARTERIAL STREETS-WIDTH MAY VARY PER CO. ENGINEER

Call before you Dig 10 Dec, 2018

16N719 - AM

Sub

90

Not to Scale

STANDARD RURAL ROADWAY SECTION

THIS WIDTH MAY BE USED AT THE DIRECTION OF THE COUNTY ENGINEER WIEN FULL WIDTH ASPHALT MAYING IS NOT NECESSARY.

we do not allow anything

just for a drive crossing

everything else is 15" min.

smaller than 12" and that is

1. All construction shall conform to Weber County standards and specifications. 2. All Construction on the Secondary Water Line shall meet or exceed Davis & Weber Canal Company Standards and Specifications. 3. Underground utility piping materials will meet or exceed West Point City

4. Culinary water services will be 3/4" Dia. C-900 DR14 PVC to be centered on the frontage and extended 10' beyond the right of way line.

5. 4" Sanitary sewer laterals to be constructed 10' down slope from the center of the lot and extended 10' beyond the right of way line.

6. 4" Land drain laterals to be constructed at the low corner of the lot and

extended 10' beyond the right of way line. 4. Saw Cut Existing Asphalt to provide a smooth clean edge.

5. All Utility trenches within the Street right of way shall have a City approved imported granular backfill.

6. Thrust block all water line fittings.

* See All Sheets*

7. All inlet grates shall be bicycle safe. 8. All fire hydrants and access roads shall be installed prior to any construction of any buildings.

9. All fire hydrants shall be placed with 4 $\frac{1}{2}$ inch connections facing the point of access for the Fire Department Apparatus.

10. Prior to the beginning of construction of any buildings, a fire flow test of new hydrants shall be conducted to verify the actual fire flow for this project. The Fire Prevention Division shall witness this test and shall be notified a minimum of 48 hours prior to the test.

11. Curb & gutter installed along 2200 South Street will be set to ensure a 1.5% minimum/3.0% Maximum cross slope from edge of asphalt. Contractor to verify prior to construction of curb.

12. An excavation permit is required for all work done within the existing Right

13. A Storm Water Construction Activity Permit is required for any construction that disturbs more than 5000 Sq. Ft. or 200 Cubic Yards. 14. All improvements need to be either installed or escrowed prior to recording

15. If construction activity will disturb more than an acre then a State SWPPP will be required. This includes the construction of the homes etc. on each

GENERAL UTILITY NOTES: 1. Coordinate all utility connections to building with plumbing plans and building

2. Verify depth and location of all existing utilities prior to constructing any new utility lines. Notify Civil Engineer of any discrepancies or conflicts prior to any connections being made.

3. All catch basin and inlet box grates are to be bicycle proof. 4. All inlet boxes located in curb and gutter are to be placed parallel to the curb and gutter and set under the frame and grate. Improperly placed boxes will be removed and replaced at no additional cost to the owner. Precast or cast in place boxes are acceptable.

5. Refer to the site electrical plan for details and locations of electrical lines, transformers and light poles.

6. Gas lines, telephone lines, and cable TV lines are not a part of these plans unless otherwise noted. 7. Water meters are to be installed per city standards and specifications. It will

be the contractor's responsibility to install all items required. 8. Water lines, valves, fire hydrants, fittings etc. are to be constructed as shown. Contractor is responsible to construct any vertical adjustments necessary to clear sewer, storm drain or other utilities as necessary including valve boxes

and hydrant spools to proper grade. 9. Field verify all existing and/or proposed Roof Drain/Roof Drain down spout connections to Storm Water System with Civil, Plumbing & Architectural plans.

Notify Engineer of any discrepancies. 10. All gravity flow utility lines shall be installed prior to any pressurized utilities unless written permission is obtained from the engineer of record before

UTILITY PIPING MATERIALS:

All piping to be installed per manufacturers recommendations. Refer to project specifications for more detailed information regarding materials,

CULINARY SERVICE LATERALS 1. 3/4" to 2" diameter pipe — copper tube ASTM B, Type K, Soft Temper

2. Over 2" diameter pipe - AWWA C-900 Class 150 pipe

WATER MAIN LINES AND FIRE LINES 1. Pipe material as shown on utility plan view or to meet city standards.

SANITARY SEWER LINES

1. All sewer piping to be Polyvinyl Chloride (PVC) sewer pipe, ASTM D 3034, Type PSM, SDR 35

STORM DRAIN LINES 1. 10" pipes or smaller - Polyvinyl Chloride (PVC) sewer pipe, ASIM D3034, Type

2. 12" to 21" pipes — Concrete Pipe, ASTM C14, Class III up to 13' of cover. For greater than 13' feet of cover, use reinforced concrete pipe and classes


3. 24" pipes or larger — Reinforced Concrete Pipe, ASTM C76, Class III up to 13' of cover, Class IV for 13' to 21' of cover, Class V for 21' to 32' of cover, and Special Design for cover greater than 32 feet.

and around pipe. Detail may be

tactor is specifically cautioned that the location and/or elevation of existing utilities as shown on these plans are based on records of the various utility companies and, where possible, measurements taken in the field. The information is not to be relied on as being exact or complete. The contractor must call the appropriate utility company at least 48 hours before any excavation to request exact field location of utilities. It shall be the responsibility of the contractor to relocate all existing utilities which conflict with the propose improvements shown on the plans.

negligence of the owner or the engineer.

W:\16N719 TERAKEE VILLAGE\Dwgs\Terakee Meadows\16N719 - AM.dwg, 12/11/2018 12:36:39 PM, JFelt, 1:1

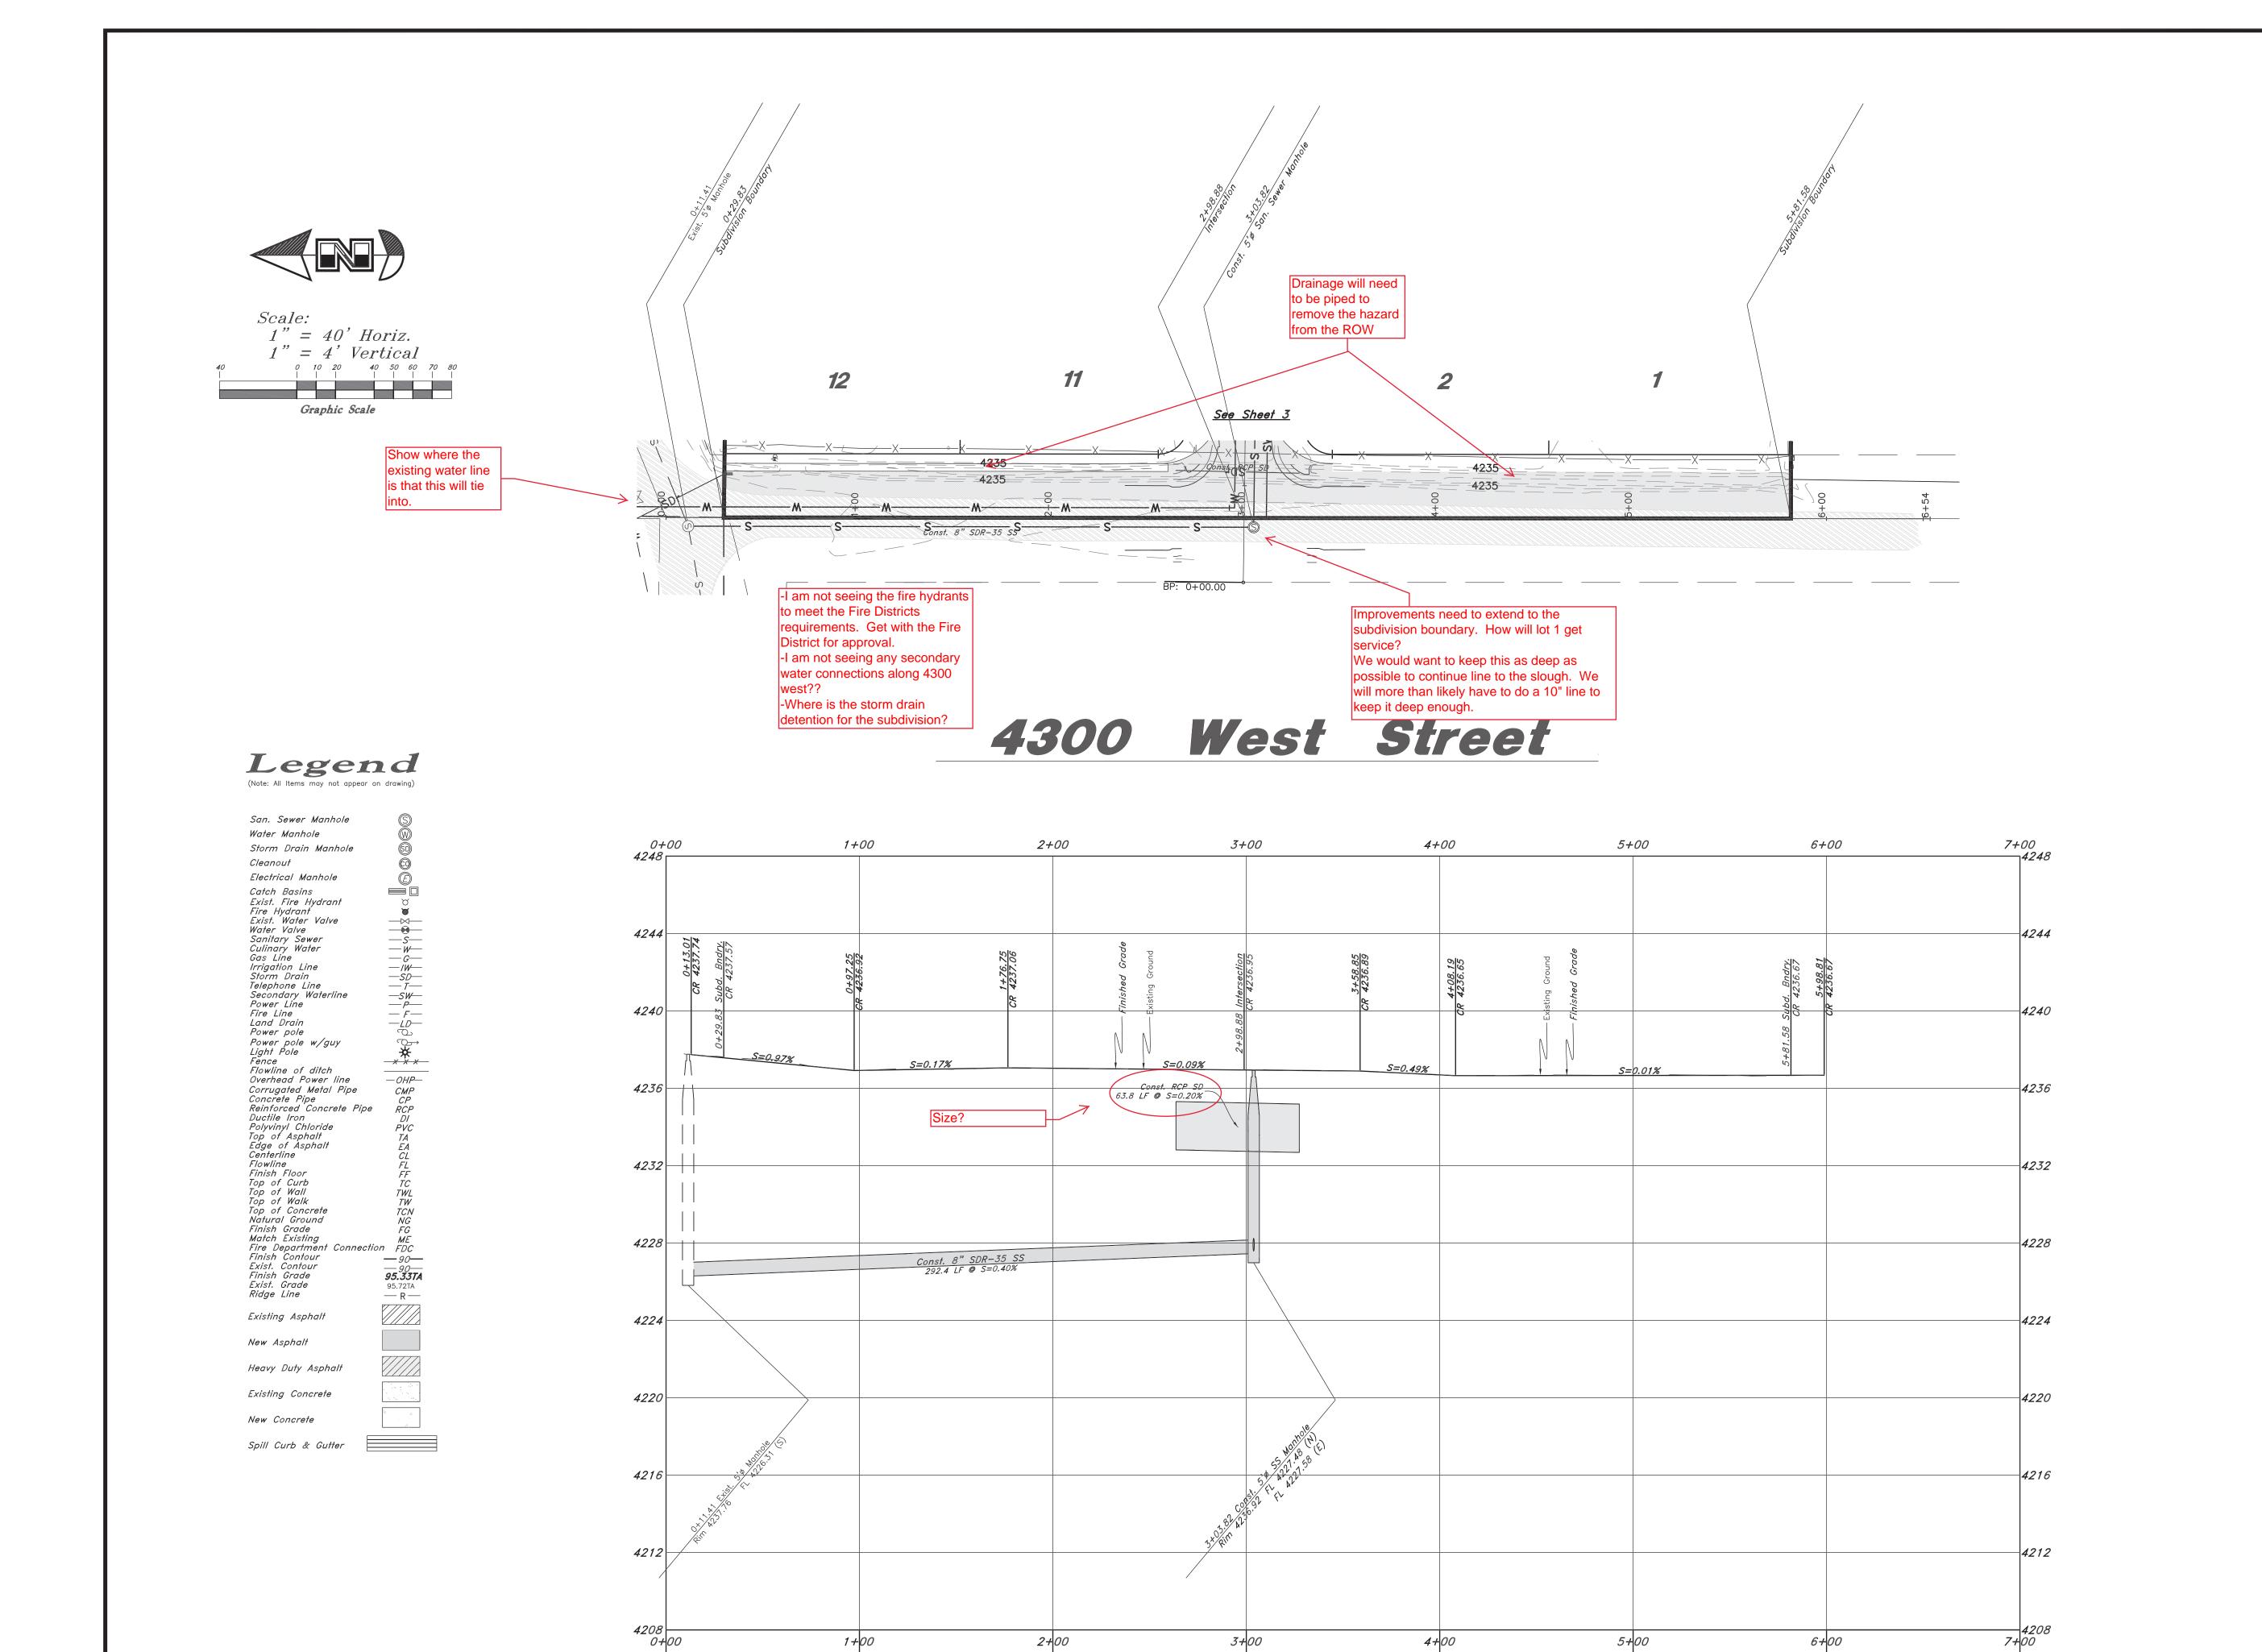

Call before you Dig
Avoid cutting underground
utility lines. It's costly. SHEET NO.


10 Dec, 2018

16N719 - AM

Subdivision

adows

ofille

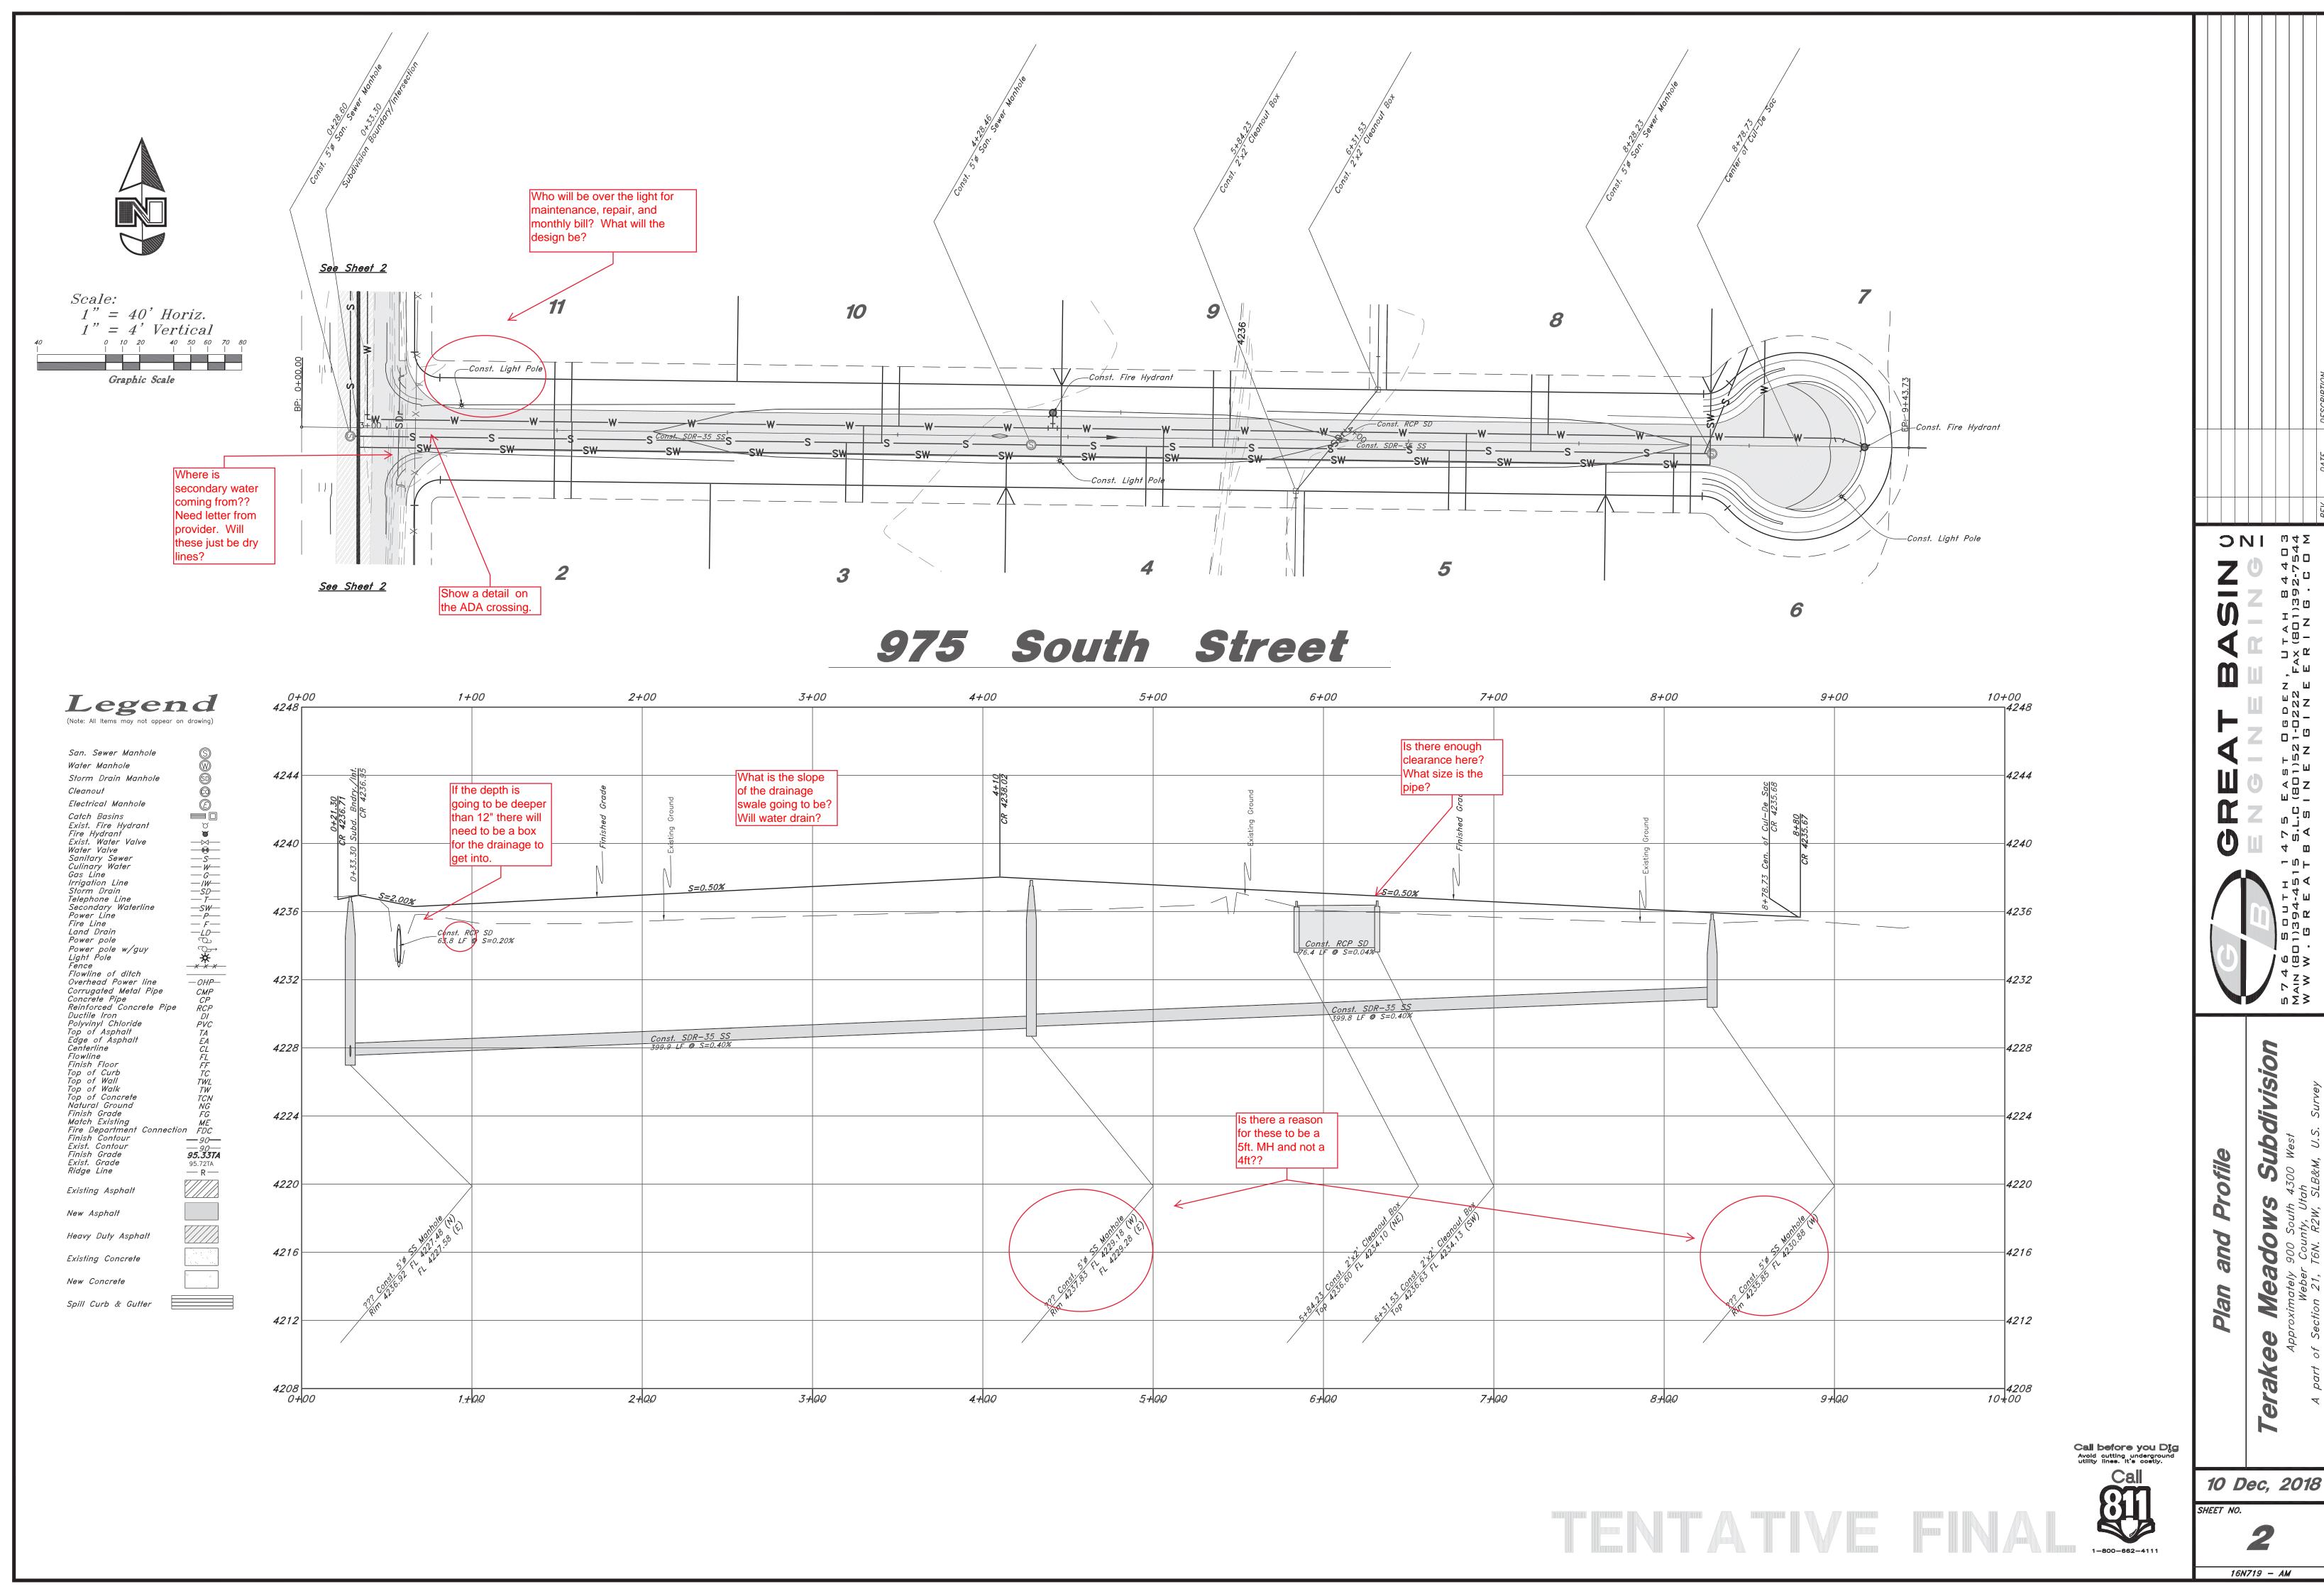


Subdivision

adows

D

W:\16N719 TERAKEE VILLAGE\Dwgs\Terakee Meadows\16N719 - AM.dwg, 12/11/2018 12:36:45 PM, JFelt, 1:1

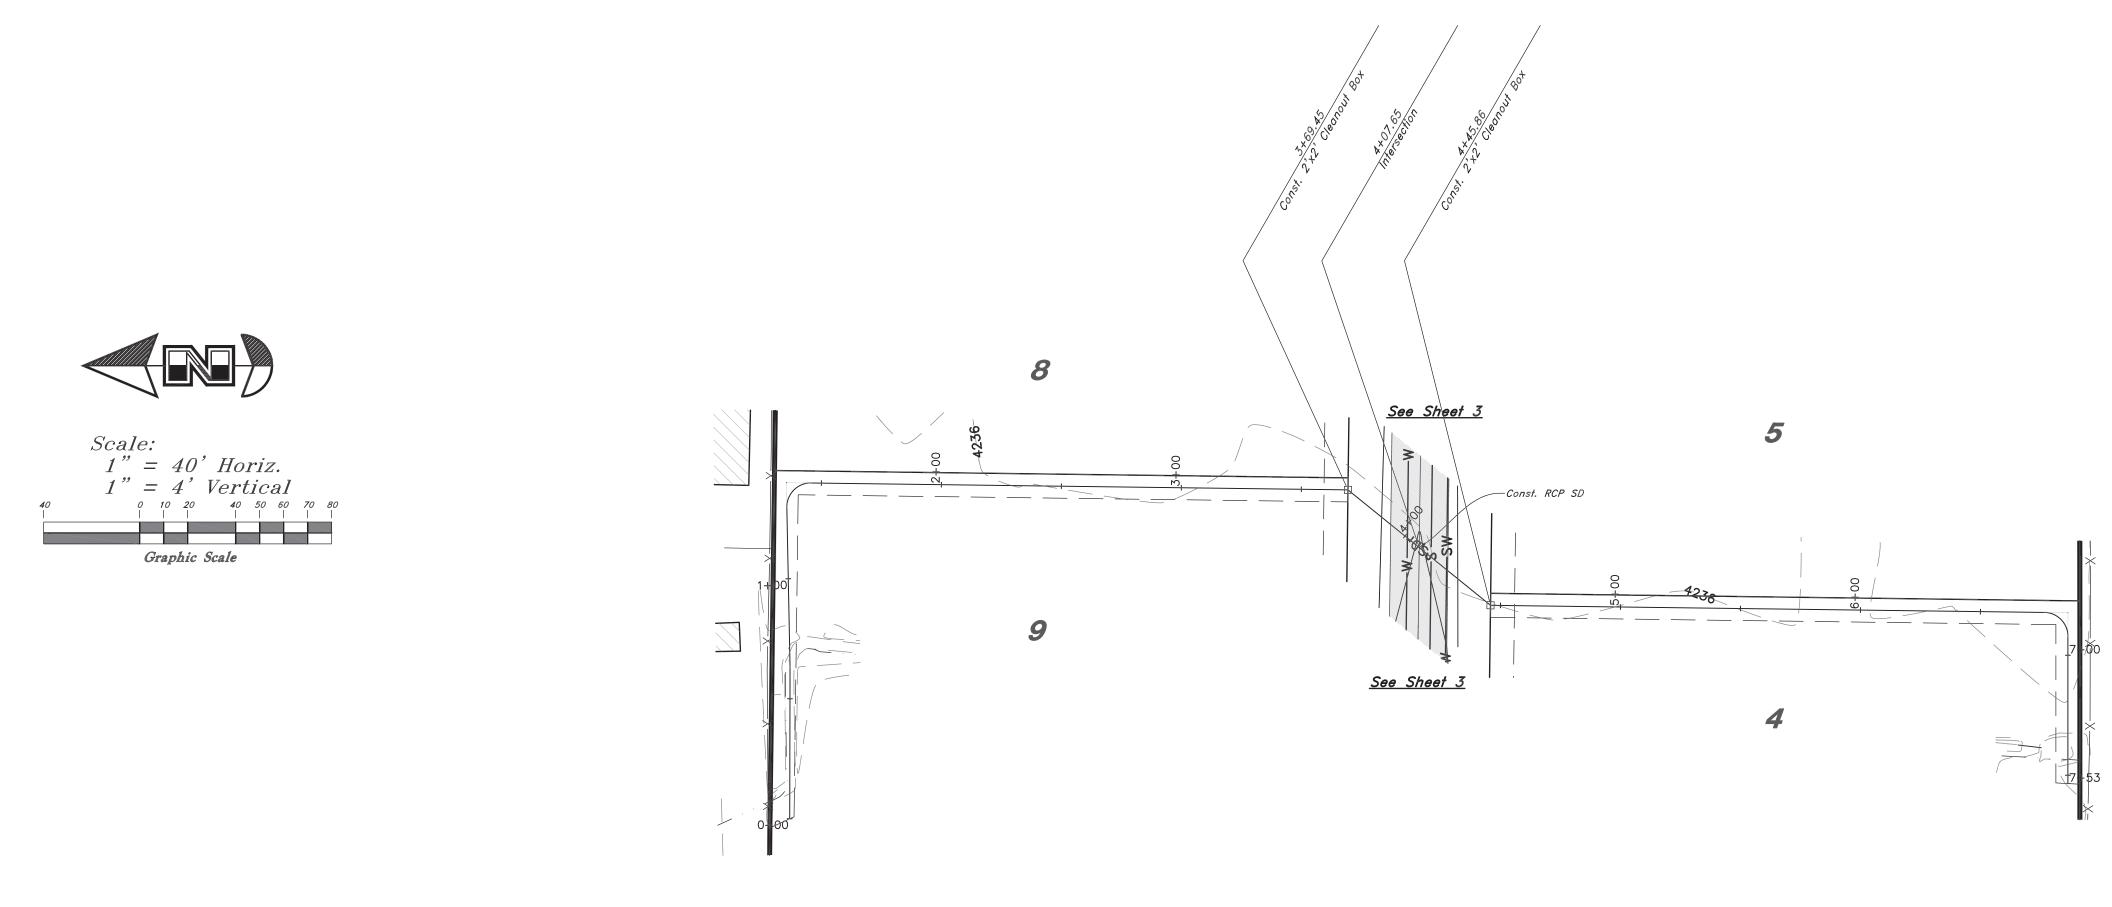

Legend (Note: All Items may not appear on drawing)

Storm Drain Manhole

Cleanout

Electrical Manhole

Catch Basins

Exist. Fire Hydrant
Fire Hydrant
Exist. Water Valve

Water Valve

Sanitary Sewer

Culinary Water


Gas Line
Irrigation Line
Storm Drain
Telephone Line
Secondary Waterline
Power Line
Fire Line
Land Drain
Power pole W/guy
Light Pole
Fence
Flowline of ditch
Overhead Power line
Corrugated Metal Pipe
Concrete Pipe
Ductile Iron
Polyvinyl Chloride
Power pole Asphalt
Edge of Asphalt
Centerline
Flinish Floor
Top of Curb
Top of Wall
Top of Wall
Top of Wall
Top of Walk
Top of Concrete
Natural Ground
Finish Grade
Match Existing
Fire Department Connection
Finish Grade
Finish Grade
Match Existing
Fire Department Connection
Finish Grade
Finish Grade
Striet
Finish Grade
Fire Department Connection
Finish Grade
Fire Striet
Finish Grade
Fire Separtment Connection
Finish Grade
Fire Department Connection
Finish Grade
Fire Striet
Fire Striet
Fire Striet
Fire Striet
Fire Striet
Fire Department Connection
Finish Grade
Fire Department Connection
Finish Grade
Fire Striet
Finish Grade
Fire Striet
F

Existing Concrete

Spill Curb & Gutter

New Concrete

Ditch Realignment

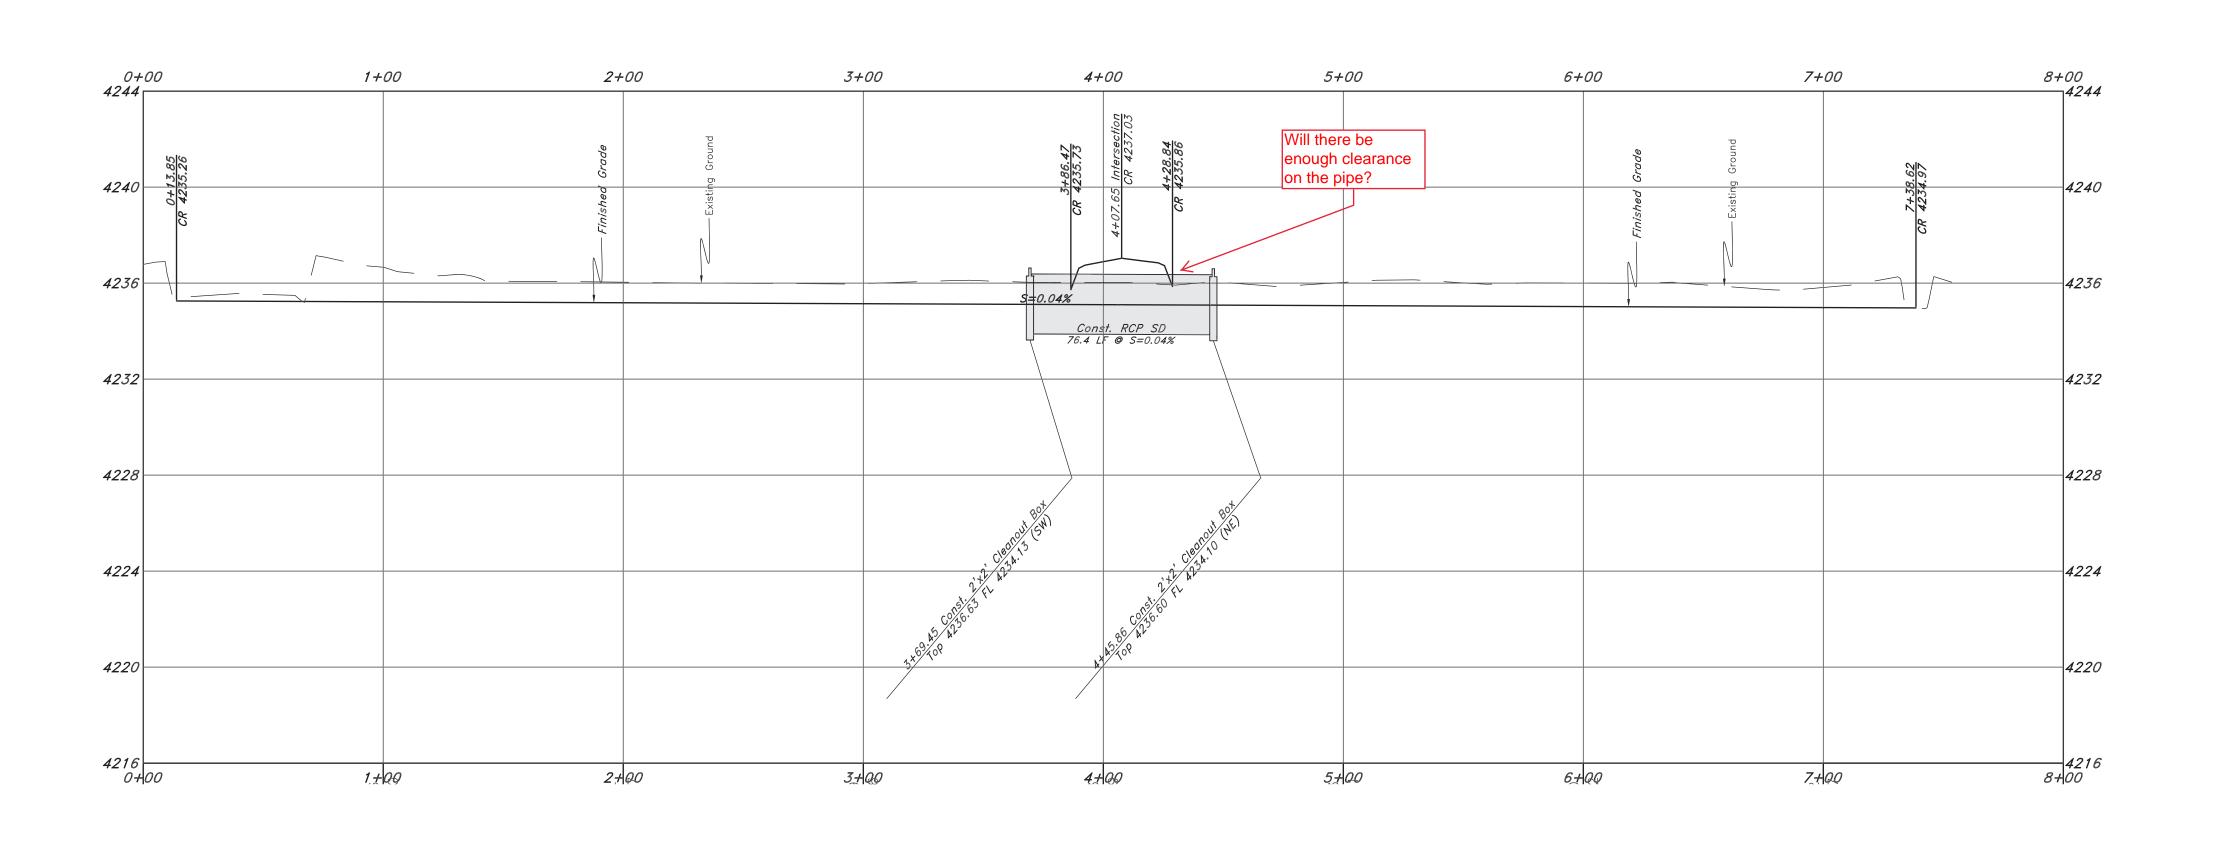

Avoid cutting underground utility lines. It's costly.

TENTATIVE FINAL

Call 1

10 Dec, 2018

SHEET NO.

16N719 - AM

Subdivision
4300 West

Meadows