

USED SWPPP BMP'S

- 1 CONSTRUCT BMP CONSTRUCTION ROAD STABILIZATION
- 2 UTILIZE BMP CONCRETE WASTE MANAGEMENT
- 3 UTILIZE BMP EQUIPMENT AND VEHICLE WASH DOWN AREA
- 4 UTILIZE BMP HAZARDOUS WASTE MATERIALS
- 5 CONSTRUCT BMP PORTABLE TOILET
- 6 CONSTRUCT BMP STABILIZED CONSTRUCTION ENTRANCE
- 7 UTILIZE BMP SPILL CLEAN-UP
- 8 CONSTRUCT BMP SILT FENCE
- 9 CONSTRUCT BMP SEEDING AND PLANTING
- 10 CONSTRUCT BMP STRAW BALE BARRIER
- 11 UTILIZE BMP VEHICLE AND EQUIPMENT CLEANING
- 12 UTILIZE BMP VEHICLE AND EQUIPMENT FUELING

CAUTION:
NOTICE TO CONTRACTOR

The contractor is specifically cautioned that the location and/or elevation of existing utilities as shown on these plans is based on records of the various utility companies and, where possible, measurements taken in the field. The information is not to be relied on as being exact or complete. The contractor must call the appropriate utility company at least 48 hours before any excavation to request exact field location of utilities. It shall be the responsibility of the contractor to relocate all existing utilities which conflict with the proposed improvements shown on the plans.

CITY ENGINEER ACCEPTANCE OF IMPROVEMENT PLANS

The improvements plans for this Subdivision have been reviewed by the County Engineer for general conformance with the requirements of the County Subdivision Ordinance. This set of County approved drawings shall be used for construction of the required subdivision improvements. The developer's Engineer, whose stamp is on these drawings is responsible for the engineering design, drafting, and related field information. The construction contractor is responsible for the dimensions which shall be confirmed and correlated at the job site; fabrication processes and techniques of construction; coordination of his or her work with all other trades; and the satisfactory performance of his or her work.

Signed this day of , 2006.

Signature

Erosion Control Notes :

1. Sandbags will be placed at discharge locations to contain and divert storm water through straw bales.
2. An earthen berm 6" high will be constructed to contain the storm water and divert it to discharge areas.
3. Storm water will be discharged into an existing drainage system to the Southwest of property. Existing Lines shall be inspected prior to Certificate of Occupancy and cleaned if necessary.
4. The Storm Water Prevention Plan shall conform to all Utah Division of Environmental Protection Regulations.

Storm Water Pollution
Prevention Plan

The Summit at Ski Lake Phase 11a

A part of the Southwest 1/4 of Section 13, a part of the Northeast 1/4 of Section 23, and a part of the Northwest 1/4 of Section 24, T6N, R1E, SLB&M, U.S. Survey



GREAT BASIN ENGINEERING NORTH

CONSULTING ENGINEERS AND SURVEYORS

5746 South 1475 East - Suite 200

Ogden, Utah 84403

P.O. Box 150048, Ogden, Utah 84415

Ogden (801)394-4515 Salt Lake City (801)521-0222 Fax (801)392-7544

SCALE : 1" = 60'

DRAWN : bjb


96N120SUMMIT 11AIMP

DATE : 17 Dec, 2010


REVISIONS :

DRWG. NO.

2
Of 2

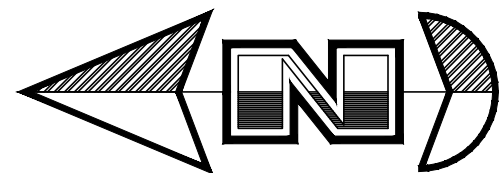

Scale: 1" = 60'



Graphic Scale