


# Technical Drainage Study

for  
The Sanctuary

September 29, 2010

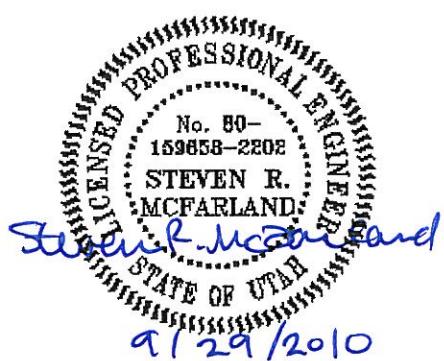

*Prepared By*  
Hansen & Associates

Job No. 07-129

## TABLE OF CONTENTS

	<u>Page</u>
<b>1. General Location and Development Description</b>	
1.1 Purpose of Report .....	1
1.2 Location of Property .....	1
1.3 Description of Property .....	1
1.4 SCS Soils Group.....	1
<b>2. Drainage Basin Description</b>	
2.1 Offsite Drainage Description.....	2
2.2 Onsite Drainage Description.....	2
<b>3. Hydrologic Analysis</b>	
3.1 Hydrologic Methodology and Criteria.....	5
3.2 Pond Pack Parameters.....	5
<b>4. Hydrologic Results .....</b>	<b>5</b>
<b>5. Detention Pond Design .....</b>	<b>7</b>
<b>6. Summary.....</b>	<b>7</b>

## List of Tables

Table 1: Onsite Area Division and CN Values.....	3
Table 2: Offsite Area Division and CN Values .....	4
Table 3: Proposed Conditions Flow Rate .....	5
Table 4: Existing and Proposed Flow Rates Compared .....	7

## Appendices

Appendix A:.....	Hydrologic Parameters
Appendix B: .....	Proposed Pond Pack Summary
Appendix C: .....	Existing Pond Pack Summary
Appendix D: .....	Drainage Basin Map

## **1.0 General Location and Development Description**

### **1.1 Purpose of Report**

The purpose of this technical report is to provide a detailed hydrologic and hydraulic analysis in order to establish overall drainage patterns, constraints and details for the proposed Sanctuary Subdivision and associated site in Huntsville, Utah. This report will also address onsite detention requirements and design as required by Weber County. The intent of the drainage system for the project is to minimize environmental impacts and work closely with the natural drainage patterns and conditions.

### **1.2 Location of Property**

The project site is located at Maple Drive in Huntsville, Utah. The project site area includes land in Maple Canyon and has a latitude of 41° 17' 16" North and a longitude of 111° 42' 58" West.

### **1.3 Description of Property**

The 520± -acre site will be developed as a single family subdivision consisting of 6 lots and all associated roads and drives. There will be a single point of ingress/egress for this project at Maple Drive. The existing site is vacant and undeveloped. The site is vegetated with native grasses, shrubs and trees. The site topography is mountainous and slopes range from 5% to greater than 30%. The entry drive and adjacent channel range in slopes from 5% to 15%.

- Roadway and Driveway slope 12% or less
- Approved pad sites 10% or less

Due to the area of the site, runoff from adjacent areas around the project site will enter the project site and drain as historically to the Maple Canyon Creek (snow melt and storm runoff). A series of check dams and detention basins are designed to detain and release runoff from the project area. Each individual lot will be responsible for detaining own runoff and having a detention plan. Ultimately, onsite and offsite runoff will drain to the Pine View Reservoir and discharge into the Willard Bay.

### **1.4 SCS Soils Group**

The project site lies within four soil groups. Approximately 6% of the site lies within the Foxol-Rock outcrop complex (FrG) soil group. This soil group has a hydrologic soil group rating of "D". Group D soils have a very slow infiltration rate and rate of water transmission. Therefore, group D soils have a high runoff potential. An additional 14% of the site lies within the Patio

gravelly loam (PdG) soil group. This soil group has a hydrologic soil group rating of "C". Group C soils have a slow infiltration rate and rate of water transmission. Therefore, group C soils have moderate runoff potential. An additional 34% of the site lies within the Durfee stony loam (DeG) soil group. This soil group also has a hydrologic soil group rating of "C. An additional 46% of the site lies within the Smarts loam (SfG) soil group. This soil group has a hydrologic soil group rating of "B". Group B soils have a moderate infiltration rate and rate of water transmission. Therefore, group B soils have a low runoff potential.

Appropriate curve number (CN) values were established by extracting values for runoff potential based on land use and soil group types for each basin.

## 2.0 Drainage Basin Description

### 2.1 Offsite Drainage Description

Offsite flows that enter the project area have been examined briefly and included in the hydrologic analysis of the project area. Any offsite flows that enter the site will not be detained, but allowed to pass through the collection and detention system. Off site flows will drain as historically to the Maple Canyon Creek.

### 2.2 Onsite Drainage Description

The original roadway cut for the water reservoir was made 20 to 25 years ago. The hillside slopes have remained stable despite the absence of any retaining structures. The new roadway entrance near the reservoir has had a gravity concrete block wall installed to help stabilize soil and control erosion.

Observations for the past three years by the contractor and engineers from our office observe that there is minimal runoff and no signs of erosion at the project site, indicating that the site is stabilized. Due to the extraordinary conditions of the site, Weber County Engineers allowed the project site to detain runoff that exceeds the existing, historical runoff. Each of the six lots will be required to detain their own runoff associated to their development and have not been included in this analysis. A series of check dams and detention basins are designed to detain and release runoff from the project area. While runoff is being detained and slowed by the check dams and detention basins, the water will be allowed to percolate into the ground. Percolation rates were looked at and are included in Appendix A.

The proposed roadways will cause some rerouting of historic drainage paths. This rerouting is controlled by culverts and drainage swells, under and along

the proposed road ways. Re-routing is done in a manner to return runoff to its historical paths as efficiently as possible while protecting the proposed roadway.

The area of interest was divided into 13 onsite drainage basins (labeled ON with number), 3 un-detained drainage basins (labeled UD with number), and 6 offsite basins (labeled OFF with number). The onsite drainage basins will drain to the historical drainage paths. The un-detained drainage basins are onsite basins that drain off site to surrounding canyons and are un-detectable. These areas will be left undisturbed. (Please see drainage basin map and topography for drainage patterns). The offsite basins are areas outside of the project area that will drain onto the project area. Drainage from these basins will continue to drain to the Maple Canyon Creek.

Basins ON 1, ON 2, ON 3, ON 4, ON 5, ON 6, ON 7, ON 8, ON 9, ON 10, OFF 2, and most of OFF 1 will continue to drain and be collected as done historically, into Maple Canyon Creek, without any interference from the proposed roadway. The remainder of basin OFF 1, ON 11, ON 12, and ON 13 will follow historical drainage paths until runoff approaches the proposed road. Drainage culverts and swales have been designed to protect the proposed roadway and to return runoff to historic drainage paths. Detention ponds and check dams are proposed to detain increased runoff and released at a controlled rate (See 5.0 Detention Pond Design, page 6). Basins OFF 3, OFF 4, OFF 5, and OFF 6 will continue to drain, as historically, to Maple Canyon Creek.

Onsite basins with their associated total areas, impervious and pervious areas, and CN values are itemized in Table 1. Offsite Basins with their associated attributes are itemized in Table 2.

**Table 1 – Onsite Area Division and CN Values**

BASIN	AREA (Acres)	IMPERVIOUS AREA (Acres)	CN VALUE	PERVIOUS AREA (Acres)	CN VALUE	WEIGHTED CN
ON 1	27.2	-	98	27.20	73	73
ON 2	26.5	-	98	26.50	66	66
ON 3	42.2	-	98	42.20	62	62
ON 4	49.1	-	98	49.10	66	66
ON 5	24.9	-	98	24.90	70	70
ON 6	11.7	-	98	11.70	66	66

ON 7	26.5	0.115	98	26.39	65	66
ON 8	11.3	0.115	98	11.19	63	64
ON 9	34.6	0.115	98	34.49	73	73
ON 10	41.4	-	98	41.40	66	66
ON 11	27.2	1.28	98	25.92	64	69
ON 12	56.4	6.14	98	50.26	54	65
ON 13	10.1	-	98	10.10	66	66
UD 1	86.4	-	98	86.40	70	70
UD 2	42.3	-	98	42.30	73	73
UD 3	4.2	0.23	98	3.97	61	66
TOTAL	522	8.00	--	514.02	--	--

Table 2 – Offsite Area Division and CN Values

Basin	Area (Acres)	Impervious Area (Acres)	CN Value	Pervious Area (Acres)	CN Value	Weighted CN Value
OFF 1	214.4	-	98	214.40	69	69
OFF 2	15.0	-	98	15.00	66	66
OFF 3	55.9	2.05	98	53.85	70	74
OFF 4	109.7	-	98	109.70	73	73
OFF 5	25.6	-	98	25.60	73	73
OFF 6	107.3	1.81	98	105.49	73	73
<b>TOTAL</b>	<b>527.9</b>	<b>3.86</b>	<b>--</b>	<b>524.04</b>	<b>--</b>	<b>--</b>

### 3.0 Hydrologic Analysis

#### 3.1 Hydrologic Methodology and Criteria

Pond Pack version 8.0068 by Haestad Methods was utilized in this analysis to estimate the peak runoff values of the analyzed watersheds for the 10 year 6 hour storm event for existing and proposed conditions. This storm was determined to be the governing storm.

Input parameters used for the Pond Pack, Hydrograph SCS method, included storm hydrograph, basin areas, basin curve numbers, TR55 sheet flow parameters, TR55 shallow concentrated flow parameters, detention volume parameters, outlet parameters and other necessary data. The Pond Pack model will provide necessary CN calculations, Time of Concentration (TC) calculations, and detention and outlet calculations. Pond Pack will also calculate basin runoff, detention required, and release rates. Pond Pack calculations for proposed and existing conditions can be found in Appendix B and Appendix C, respectively, of this report.

#### 3.2 Pond Pack Parameters

The basin areas were established based on site survey information and design

grading information. The curve numbers used were calculated by use of sub basin areas and use. Time of Concentration values were calculated within the Pond Pack program. A minimum TC value of 5 minutes was utilized. TC calculations can be found in Appendix B and Appendix C of this report. This project site is within the NOAA atlas 14 point precipitation area. The point precipitation used for this analysis is 2.42 inches for the 2 year 24 hour storm and 1.87 inches for the 10 year 6 hour storm.

#### 4.0 Hydrologic Results

The following table summarizes proposed condition flow rates for the 10 year storm event for the concentration points relevant to the site and condition.

**Table 3 - Proposed Conditions Flow Rate**

Drainage Basin	Area (acres)	Peak Basin Flow (cfs)	Pond Release (cfs)	Pond Elevation (ft)	Pond Storage (cu-ft)
ON 1	27.2	2.28	--	--	--
ON 2	26.5	0.98	--	--	--
ON 3	42.2	0.93	--	--	--
ON 4	49.1	1.78	--	--	--
ON 5	24.9	1.44	--	--	--
ON 6	11.7	0.44	--	--	--
ON 7	26.5	0.99	--	--	--
ON 8	11.3	0.31	--	--	--
ON 9	34.6	2.9	--	--	--
ON 10	41.4	1.54	--	--	--
ON 11	27.2	1.42	--	--	--
ON 12	56.4	1.80	--	--	--
ON 13	10.1	0.37	--	--	--
UD 1	86.4	5.03	--	--	--
UD 2	42.3	3.55	--	--	--
UD 3	4.2	0.15	--	--	--
OFF 1	214.4	11.27	--	--	--

OFF 2	15.0	0.56	--	--	--
OFF 3	55.9	5.33	--	--	--
OFF 4	109.7	8.91	--	--	--
OFF 5	25.6	2.11	--	--	--
OFF 6	107.3	8.99			
Detention	--	--	33.27	5796.65	7,841
<b>Total</b>	<b>1,049.9</b>	<b>63.08</b>	<b>33.27</b>	<b>--</b>	<b>7,841</b>

The standard allowable release rate in Weber County is 0.1 cfs per acre. Due to the extraordinary conditions of the site, Weber County Engineers allowed the project site to detain runoff that exceeds the existing, historical runoff. An existing hydrologic analysis was performed to determine the existing runoff. Table 4 compares the existing, historical runoff to the proposed condition runoff for the site.

**Table 4 – Existing and Proposed Flow Rates Compared**

Analysis	Node	Flow Rate (cfs)
Existing	Detention	33.31
Proposed	Detention	34.72
<b>Storage Runoff</b>	<b>--</b>	<b>1.41</b>

Existing runoff from the project area was determined to be 33.31 cfs for the 10 year 6 hour storm event (see Appendix C for existing hydrologic analysis in Pond Pack). This runoff was then set as the allowable discharge rate from the project site. Runoff that exceeds this amount will be detained in a series of check dams and detention ponds. The designed release rate as shown in Table 3 is 33.27 cfs. This is below the allowable release of 33.31 cfs. The proposed analysis for the project site has a runoff of 34.72 cfs. The difference in runoff, and therefore the storage runoff, is 1.41 cfs (see Appendix B for proposed hydrologic analysis).

## 5.0 Detention Pond Design

The project site consists of steep terrain in a canyon area. Due to the existing topography, a location for a detention pond of considerable size was limited. Therefore a series of check dams and detention ponds will be used along the drainage swales paralleling the roadways (see attached Drainage Basin Map). The sites release rate is set at the historic flow rate of 33.27 cfs. The required detention volume is 7,841 cubic feet and the total provided volume is 14,854 cubic feet. Therefore, a detention volume in excess of 50% of the required will be provided. The release from the detention pond will be released by means of a weir. The discharge from the pond will be released into the Maple Canyon Creek and continue to follow the drainage path to the Pine View Reservoir.

## 6.0 Summary

The project site is located at Maple Drive in Huntsville, Utah. The project site area includes land in Maple Canyon. The  $520\pm$  -acre site will be developed as a single family subdivision consisting of 6 lots and all associated roads and drives. There will be a single point of ingress/egress for this project at Maple Drive. The site is vegetated with native grasses, shrubs and trees. The site topography is mountainous and slopes range from 5% to greater than 30%. The 10 year six hour storm event was determined to be the governing storm and used to analyze runoff associated with the site. Weber County Engineers allowed the project site to detain runoff that exceeds the existing, historical runoff for the project area. The difference in existing and proposed runoff and therefore the detained runoff is 1.41 cfs. The required detention volume is 7,841 cubic feet and the total provided volume is 14,854 cubic feet. Release from the pond will be controlled by means of a weir. It discharges into the Maple Canyon Creek.

# Appendix A

## Hydrologic Parameters





**POINT PRECIPITATION  
FREQUENCY ESTIMATES  
FROM NOAA ATLAS 14**



**Utah 41.2878 N 111.716 W 6181 feet**

from "Precipitation-Frequency Atlas of the United States" NOAA Atlas 14, Volume 1, Version 4  
G.M. Bonnin, D. Martin, B. Lin, T. Parzybok, M.Yekta, and D. Riley  
NOAA, National Weather Service, Silver Spring, Maryland, 2006

Extracted: Wed Mar 19 2008

Confidence Limits	Seasonality	Location Maps	Other Info.	GIS data	Maps	Help	Docs	U.S. Map
-------------------	-------------	---------------	-------------	----------	------	------	------	----------

**Precipitation Frequency Estimates (inches)**

ARI* (years)	5 min	10 min	15 min	30 min	60 min	120 min	3 hr	6 hr	12 hr	24 hr	48 hr	4 day	7 day	10 day	20 day	30 day	45 day	60 day
1	0.16	0.24	0.30	0.41	0.51	0.66	0.78	1.09	1.46	1.97	2.42	3.13	3.97	4.59	6.18	7.64	9.67	11.37
2	0.20	0.31	0.38	0.52	0.64	0.83	0.96	1.34	1.79	2.42	2.97	3.86	4.90	5.67	7.62	9.39	11.88	13.98
5	0.28	0.42	0.52	0.70	0.87	1.07	1.21	1.62	2.16	2.91	3.58	4.68	5.95	6.82	9.08	11.13	14.05	16.51
10	0.34	0.52	0.64	0.87	1.07	1.30	1.43	1.87	2.50	3.32	4.09	5.38	6.82	7.76	10.21	12.48	15.76	18.45
25	0.44	0.67	0.84	1.13	1.39	1.67	1.79	2.25	2.99	3.89	4.79	6.33	8.02	9.01	11.68	14.23	17.98	20.93
50	0.54	0.82	1.01	1.36	1.69	2.00	2.13	2.56	3.39	4.33	5.34	7.09	8.96	9.96	12.77	15.52	19.62	22.73
100	0.65	0.98	1.22	1.64	2.03	2.40	2.52	2.92	3.83	4.80	5.91	7.88	9.95	10.92	13.84	16.77	21.26	24.50
200	0.78	1.18	1.46	1.97	2.44	2.87	2.99	3.33	4.30	5.27	6.48	8.69	10.96	11.89	14.88	17.99	22.86	26.19
500	0.99	1.50	1.86	2.51	3.11	3.62	3.74	4.11	5.02	5.91	7.27	9.81	12.34	13.17	16.20	19.54	24.94	28.34
1000	1.19	1.81	2.24	3.02	3.74	4.33	4.44	4.82	5.61	6.42	7.88	10.68	13.42	14.14	17.19	20.68	26.48	29.91

[Text version of table](#)

\* These precipitation frequency estimates are based on a [partial duration series](#). ARI is the Average Recurrence Interval.  
Please refer to the [documentation](#) for more information. NOTE: Formatting forces estimates near zero to appear as zero.

**\* Upper bound of the 90% confidence interval  
Precipitation Frequency Estimates (inches)**

ARI** (years)	5 min	10 min	15 min	30 min	60 min	120 min	3 hr	6 hr	12 hr	24 hr	48 hr	4 day	7 day	10 day	20 day	30 day	45 day	60 day
1	0.18	0.28	0.35	0.47	0.58	0.75	0.87	1.20	1.61	2.19	2.69	3.47	4.47	5.17	6.89	8.49	10.69	12.48
2	0.23	0.36	0.44	0.60	0.74	0.94	1.08	1.47	1.97	2.69	3.31	4.28	5.52	6.37	8.50	10.45	13.13	15.36
5	0.32	0.48	0.60	0.81	1.00	1.22	1.35	1.78	2.39	3.24	4.00	5.20	6.71	7.67	10.13	12.39	15.53	18.14
10	0.39	0.60	0.74	0.99	1.23	1.48	1.61	2.06	2.76	3.69	4.55	5.97	7.69	8.73	11.40	13.90	17.43	20.27
25	0.51	0.78	0.97	1.30	1.61	1.91	2.03	2.50	3.33	4.33	5.33	7.03	9.04	10.14	13.04	15.85	19.90	23.02
50	0.63	0.95	1.18	1.59	1.97	2.32	2.42	2.86	3.81	4.82	5.95	7.88	10.11	11.21	14.26	17.29	21.75	25.02
100	0.76	1.16	1.44	1.94	2.40	2.81	2.92	3.30	4.35	5.33	6.58	8.78	11.23	12.31	15.47	18.72	23.60	27.00
200	0.94	1.43	1.77	2.38	2.94	3.43	3.52	3.81	4.95	5.87	7.23	9.69	12.40	13.41	16.65	20.12	25.43	28.90
500	1.23	1.87	2.32	3.12	3.87	4.45	4.53	4.81	5.91	6.60	8.13	10.97	14.03	14.92	18.19	21.91	27.82	31.37
1000	1.52	2.31	2.86	3.86	4.77	5.45	5.50	5.76	6.72	7.18	8.84	11.98	15.32	16.09	19.35	23.25	29.65	33.22

\* The upper bound of the confidence interval at 90% confidence level is the value which 5% of the simulated quantile values for a given frequency are greater than.

\*\* These precipitation frequency estimates are based on a [partial duration series](#). ARI is the Average Recurrence Interval.

Please refer to the [documentation](#) for more information. NOTE: Formatting prevents estimates near zero to appear as zero.

**\* Lower bound of the 90% confidence interval  
Precipitation Frequency Estimates (inches)**

ARI** (years)	5 min	10 min	15 min	30 min	60 min	120 min	3 hr	6 hr	12 hr	24 hr	48 hr	4 day	7 day	10 day	20 day	30 day	45 day	60 day
1	0.14	0.21	0.27	0.36	0.44	0.59	0.70	1.00	1.34	1.77	2.18	2.82	3.55	4.11	5.54	6.90	8.76	10.34


2	0.18	0.28	0.34	0.46	0.57	0.74	0.87	1.23	1.64	2.18	2.68	3.48	4.38	5.07	6.83	8.48	10.76	12.71
5	0.24	0.37	0.46	0.62	0.76	0.95	1.08	1.48	1.97	2.62	3.23	4.22	5.30	6.09	8.13	10.03	12.70	14.99
10	0.30	0.45	0.56	0.75	0.93	1.14	1.27	1.69	2.25	2.99	3.68	4.83	6.06	6.92	9.13	11.22	14.21	16.74
25	0.38	0.57	0.71	0.96	1.19	1.43	1.57	2.01	2.67	3.48	4.29	5.66	7.10	8.01	10.43	12.76	16.16	18.93
50	0.44	0.68	0.84	1.13	1.40	1.68	1.82	2.26	2.99	3.87	4.76	6.31	7.90	8.82	11.36	13.87	17.58	20.50
100	0.52	0.79	0.98	1.32	1.63	1.95	2.10	2.53	3.32	4.26	5.25	6.98	8.73	9.63	12.28	14.95	18.98	22.04
200	0.60	0.92	1.13	1.53	1.89	2.25	2.41	2.82	3.65	4.66	5.72	7.65	9.56	10.43	13.14	15.97	20.33	23.47
500	0.72	1.10	1.36	1.84	2.27	2.68	2.88	3.38	4.14	5.19	6.36	8.55	10.67	11.46	14.24	17.24	22.02	25.25
1000	0.83	1.26	1.56	2.10	2.60	3.06	3.28	3.85	4.51	5.59	6.85	9.24	11.51	12.23	15.03	18.14	23.26	26.52

\* The lower bound of the confidence interval at 90% confidence level is the value which 5% of the simulated quantile values for a given frequency are less than.

\*\* These precipitation frequency estimates are based on a partial duration maxima series. ARI is the Average Recurrence Interval.


Please refer to the [documentation](#) for more information. NOTE: Formating prevents estimates near zero to appear as zero.

Partial duration based Point Precipitation Frequency Estimates - Version: 4  
41.2878 N 111.716 W 6181 ft

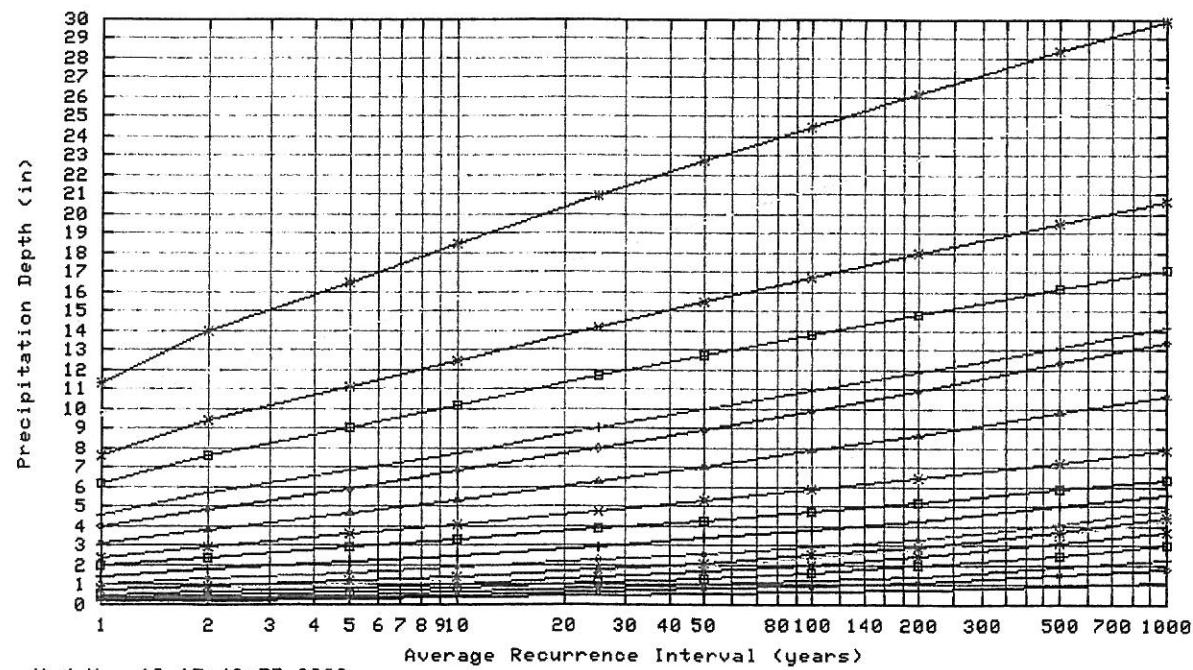


Wed Mar 19 17:49:55 2008

Duration			
5-min	—	48-hr	—*
10-min	◆	3-hr	—*
15-min	+	6-hr	—*
30-min	□	12-hr	—†
60-min	—*	24-hr	—*
			4-day
			7-day
			10-day
			20-day
			30-day
			60-day

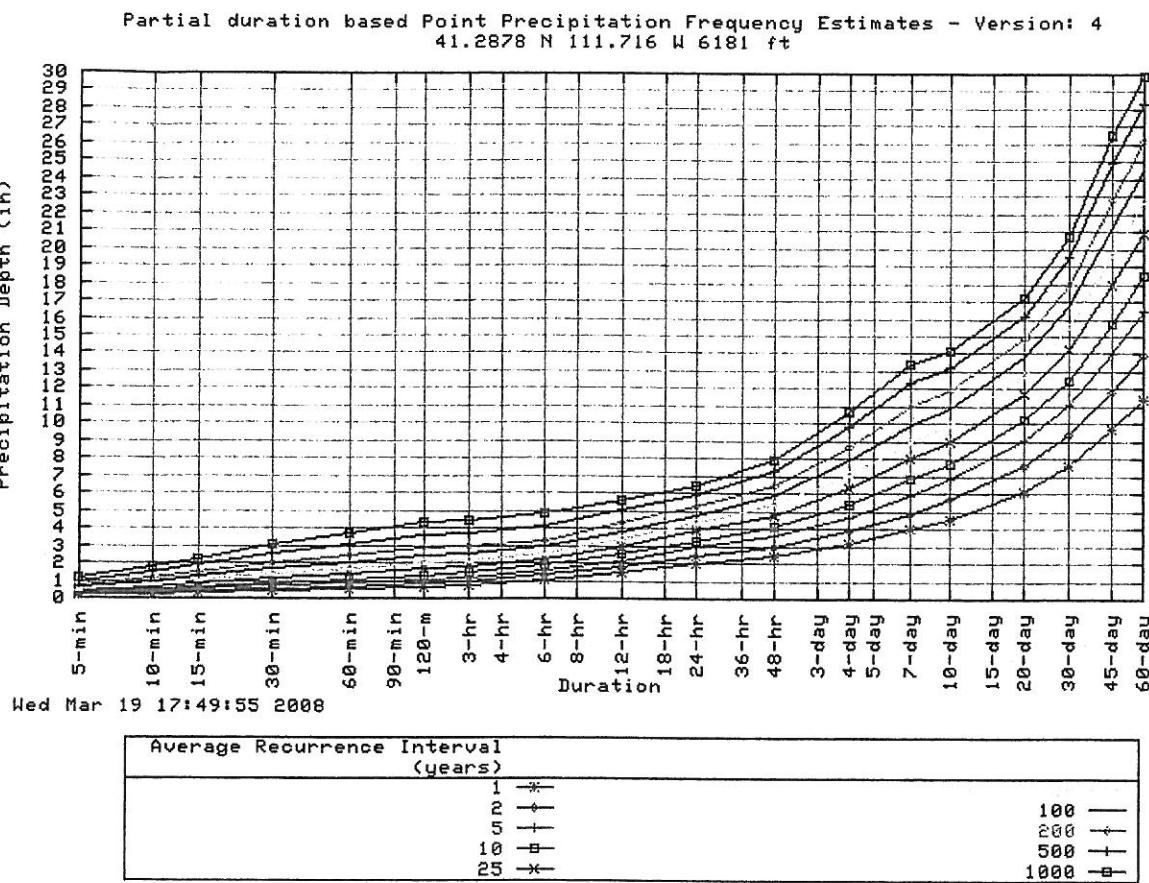


## Maps -

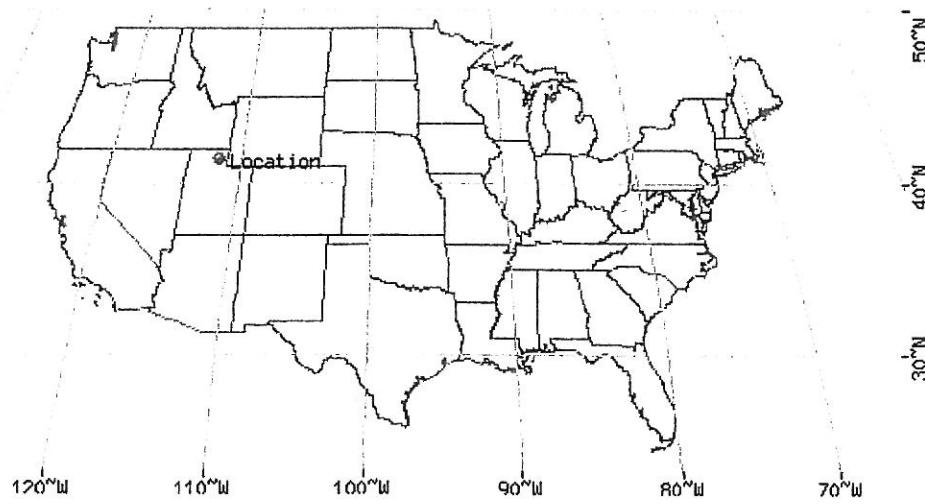

These maps were produced using a direct map request from the  
[U.S. Census Bureau Mapping and Cartographic Resources](#)  
[Tiger Map Server](#).

Please read [disclaimer](#) for more information.

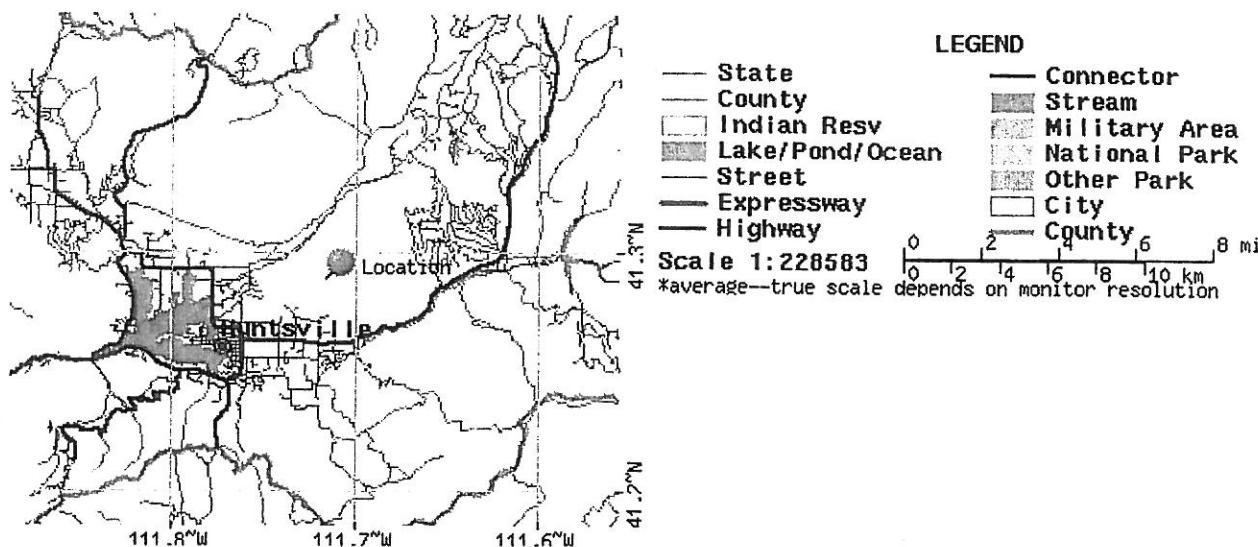

## Other Maps/Photographs -

[View USGS digital orthophoto quadrangle \(DOQ\)](#) covering this location from TerraServer; [USGS Aerial Photograph](#) may also be available from this site. A DOQ is a computer-generated image of an aerial photograph in which image displacement caused by terrain relief and camera tilts has been removed. It combines the image characteristics of a photograph with the geometric qualities of a map. Visit the [USGS](#) for more information.

## Watershed/Stream Flow Information -

[Find the Watershed](#) for this location using the U.S. Environmental Protection Agency's site.

## Climate Data Sources -

Precipitation frequency results are based on data from a variety of sources, but largely NCDC. The following links provide general information about observing sites in the area, regardless of if their data was used in this study. For detailed information about the stations used in this study, please refer to our documentation.

Using the [National Climatic Data Center's \(NCDC\)](#) station search engine, locate other climate stations within:

...OR...  of this location (41.2878/-111.716). Digital ASCII data can be obtained directly from [NCDC](#).

Find [Natural Resources Conservation Service \(NRCS\) SNOTEL](#) (SNOWpack TELEmetry) stations by visiting the [Western Regional Climate Center's state-specific SNOTEL station maps](#).

Hydrometeorological Design Studies Center  
DOC/NOAA/National Weather Service  
1325 East-West Highway  
Silver Spring, MD 20910

(301) 713-1669  
Questions?: [HDSC.Questions@noaa.gov](mailto:HDSC.Questions@noaa.gov)

[Disclaimer](#)

Hydrologic Soil Group—Morgan Area, Utah - Morgan County and Part of Weber County  
(Golden Eagle—The Sanctuary)

Yellow = C  
Purple = B  
Pink = D



Natural Resources  
Conservation Service

Web Soil Survey 2.0  
National Cooperative Soil Survey

3/19/2008  
Page 1 of 4

Hydrologic Soil Group—Morgan Area, Utah - Morgan County and Part of Weber County  
(Golden Eagle- The Sanctuary)

## MAP LEGEND

### Area of Interest (AOI)

Area of Interest (AOI)

Local Roads

Other Roads

Original soil survey map sheets were prepared at publication scale. Viewing scale and printing scale, however, may vary from the original. Please rely on the bar scale on each map sheet for proper map measurements.

### Soils

Soil Map Units

Soil Map Units

### Soil Ratings

A

A/D

B

B/D

C

C/D

D

D

Not rated or not available

### Political Features

Municipalities

Cities

Urban Areas

Urban Areas

### Water Features

Oceans

Oceans

Streams and Canals

Streams and Canals

### Transportation

Railroads

Rails

Interstate Highways

Interstate Highways

US Routes

US Routes

State Highways

State Highways

## MAP INFORMATION

Source of Map: Natural Resources Conservation Service

Web Soil Survey URL: <http://websoilsurvey.nrcs.usda.gov>

Coordinate System: UTM Zone 12N

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Morgan Area, Utah - Morgan County and Part of Weber County

Survey Area Data: Version 3, Dec 7, 2006

Date(s) aerial images were photographed: 10/4/1997

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Hydrologic Soil Group

Hydrologic Soil Group— Summary by Map Unit — Morgan Area, Utah - Morgan County and Part of Weber County				
Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
DeG	Durfee stony loam, 30 to 70 percent slopes	C	247.1	24.5%
FrG	Foxol-Rock outcrop complex, 40 to 70 percent slopes	D	248.9	24.7%
HtC	Herd-Yence complex, 3 to 15 percent slopes	C	0.0	0.0%
PdG	Patio gravelly loam, 40 to 60 percent slopes	C	115.7	11.5%
PoG	Poleline stony loam, 40 to 70 percent slopes	B	0.0	0.0%
SfG	Smarts loam, 40 to 60 percent slopes	B	397.4	39.4%
Totals for Area of Interest (AOI)			1,009.1	100.0%

## Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

**Group A.** Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

**Group B.** Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

**Group C.** Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

**Group D.** Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.


## Rating Options

*Aggregation Method:* Dominant Condition

*Component Percent Cutoff:* None Specified


*Tie-break Rule:* Lower

Saturated Hydraulic Conductivity (Ksat)—Morgan Area, Utah - Morgan County and Part of Weber County  
(07-129 KSat)

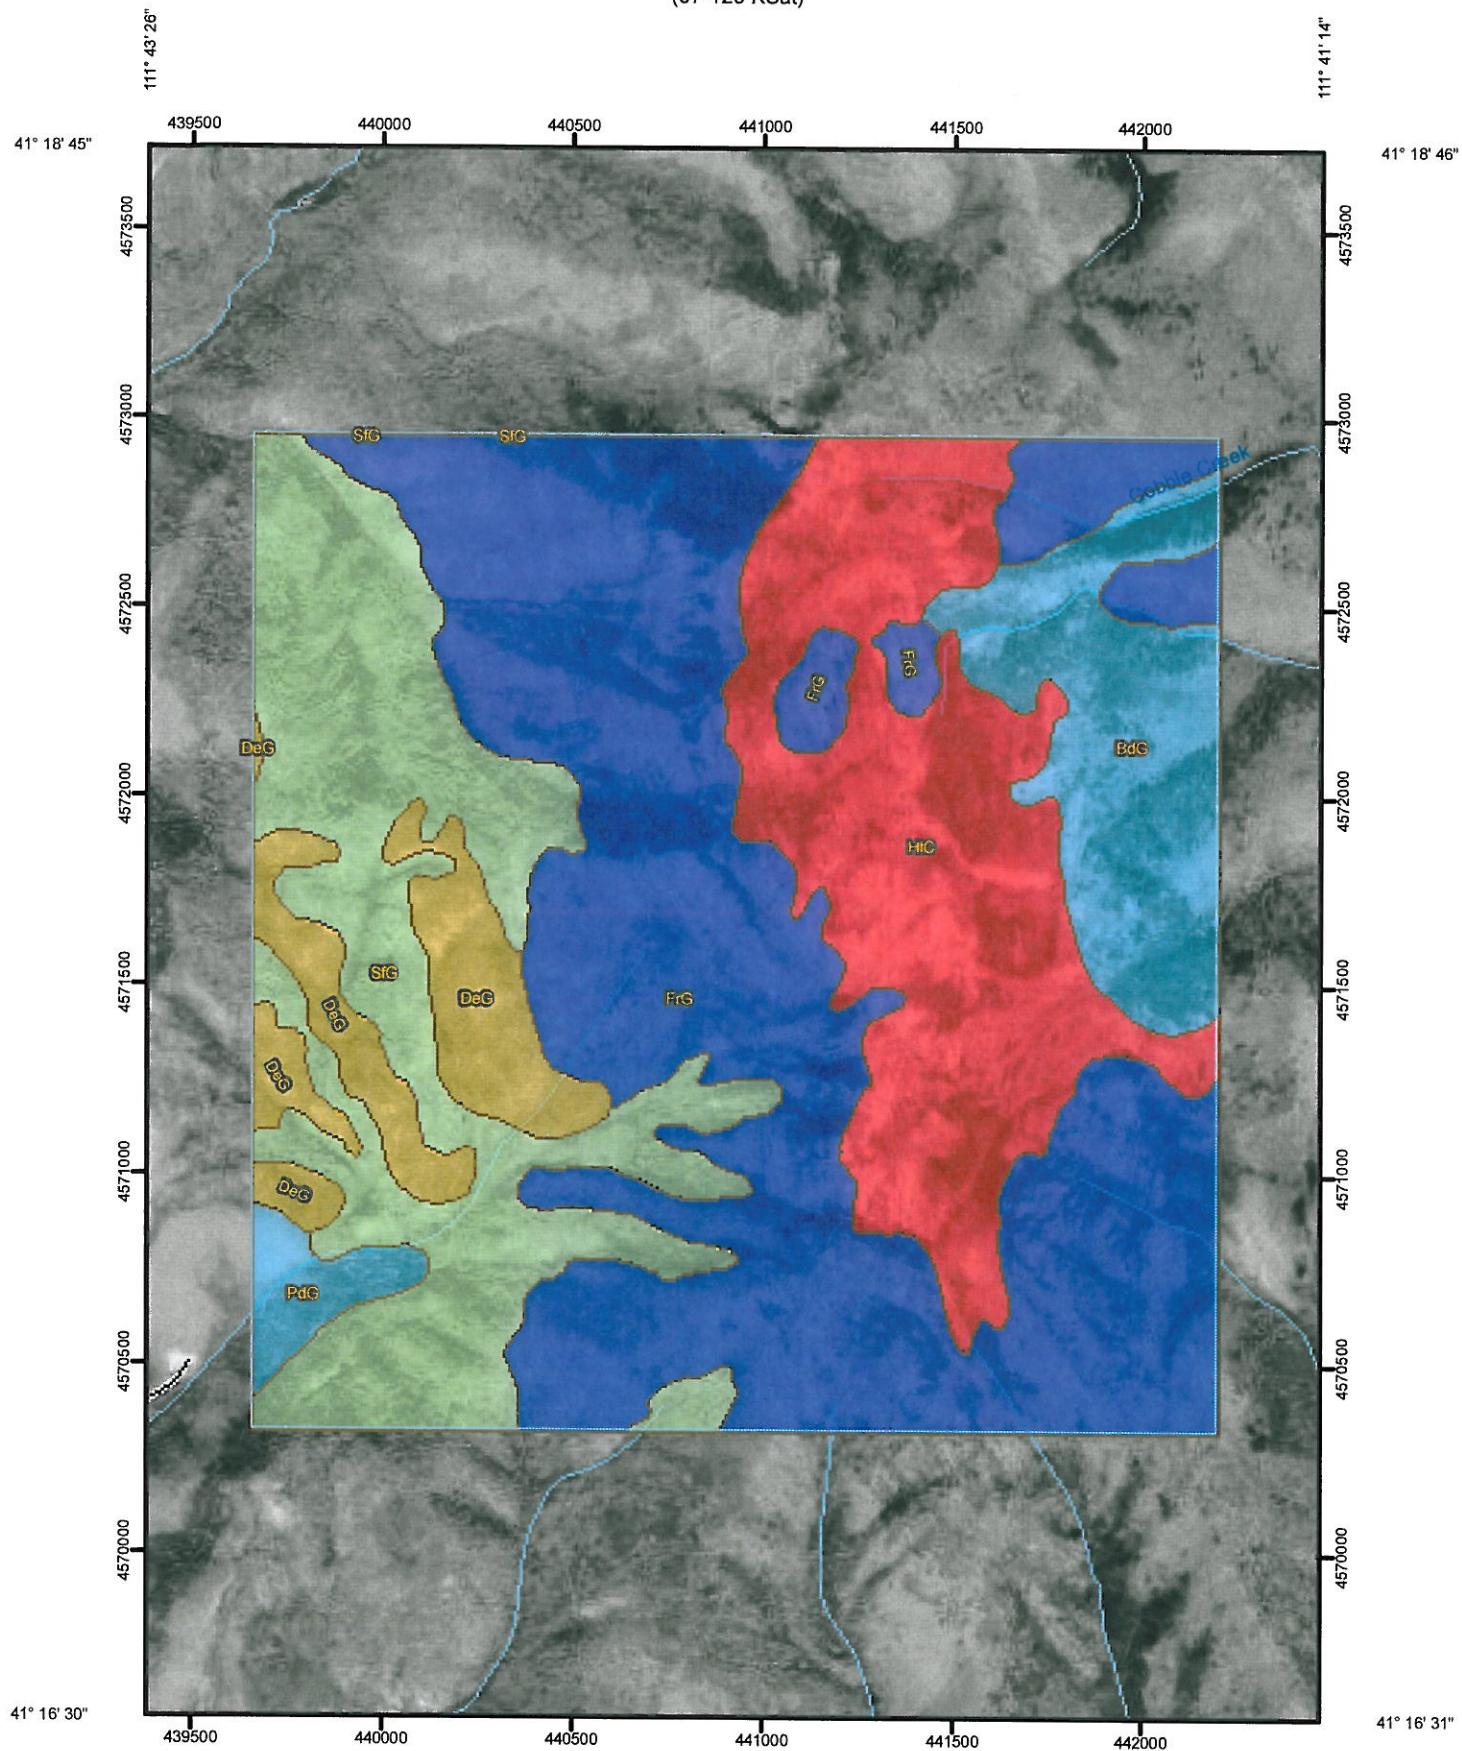

Map Scale: 1:19,800 if printed on A size (8.5" x 11") sheet.

Meters  
0 150 300 600 900  
Feet  
0 500 1,000 2,000 3,000



Natural Resources  
Conservation Service

Web Soil Survey  
National Cooperative Soil Survey

9/29/2010  
Page 1 of 4

## MAP LEGEND

**Area of Interest (AOI)**  
 Area of Interest (AOI)

**Soils**  
 Soil Map Units

**Soil Ratings**

- <= 2.32
- > 2.32 AND <= 3.1453
- > 3.1453 AND <= 5.1102
- > 5.1102 AND <= 18.7
- > 18.7 AND <= 22.5265
- Not rated or not available

**Political Features**

Cities

**Water Features**

Oceans

Streams and Canals

**Transportation**

- Rails
- Interstate Highways
- US Routes
- Major Roads
- Local Roads

## MAP INFORMATION

Map Scale: 1:19,800 if printed on A size (8.5" x 11") sheet.

The soil surveys that comprise your AOI were mapped at 1:24,000.

Please rely on the bar scale on each map sheet for accurate map measurements.

Source of Map: Natural Resources Conservation Service  
Web Soil Survey URL: <http://websoilsurvey.nrcs.usda.gov>  
Coordinate System: UTM Zone 12N NAD83

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Morgan Area, Utah - Morgan County and Part of Weber County  
Survey Area Data: Version 5, Feb 26, 2010

Date(s) aerial images were photographed: 10/4/1997

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Saturated Hydraulic Conductivity (Ksat)

Saturated Hydraulic Conductivity (Ksat)— Summary by Map Unit — Morgan Area, Utah - Morgan County and Part of Weber County				
Map unit symbol	Map unit name	Rating (micrometers per second)	Acres in AOI	Percent of AOI
BdG	Broad Canyon stony loam, 30 to 70 percent	18.7000	151.7	9.2%
DeG	Durfee stony loam, 30 to 70 percent slopes	3.1453	106.2	6.4%
FrG	Foxol-Rock outcrop complex, 40 to 70 percent slopes	22.5265	699.3	42.4%
HtC	Herd-Yence complex, 3 to 15 percent slopes	2.3200	324.9	19.7%
PdG	Patio gravelly loam, 40 to 60 percent slopes	14.4970	25.6	1.6%
SfG	Smarts loam, 40 to 60 percent slopes	5.1102	340.4	20.7%
<b>Totals for Area of Interest</b>			<b>1,648.2</b>	<b>100.0%</b>

### Description

Saturated hydraulic conductivity (Ksat) refers to the ease with which pores in a saturated soil transmit water. The estimates are expressed in terms of micrometers per second. They are based on soil characteristics observed in the field, particularly structure, porosity, and texture. Saturated hydraulic conductivity is considered in the design of soil drainage systems and septic tank absorption fields.

For each soil layer, this attribute is actually recorded as three separate values in the database. A low value and a high value indicate the range of this attribute for the soil component. A "representative" value indicates the expected value of this attribute for the component. For this soil property, only the representative value is used.

The numeric Ksat values have been grouped according to standard Ksat class limits.

### Rating Options

*Units of Measure:* micrometers per second

*Aggregation Method:* Dominant Component

*Component Percent Cutoff:* None Specified

*Tie-break Rule:* Fastest

*Interpret Nulls as Zero:* No

*Layer Options:* Depth Range



*Top Depth:* 0

*Bottom Depth:* 100


*Units of Measure:* Inches



# Appendix B

## Proposed Pond Pack Summary

POND PACK ANALYSIS: THE SANCTUARY 10 YR - 6 HR STORM EVENT

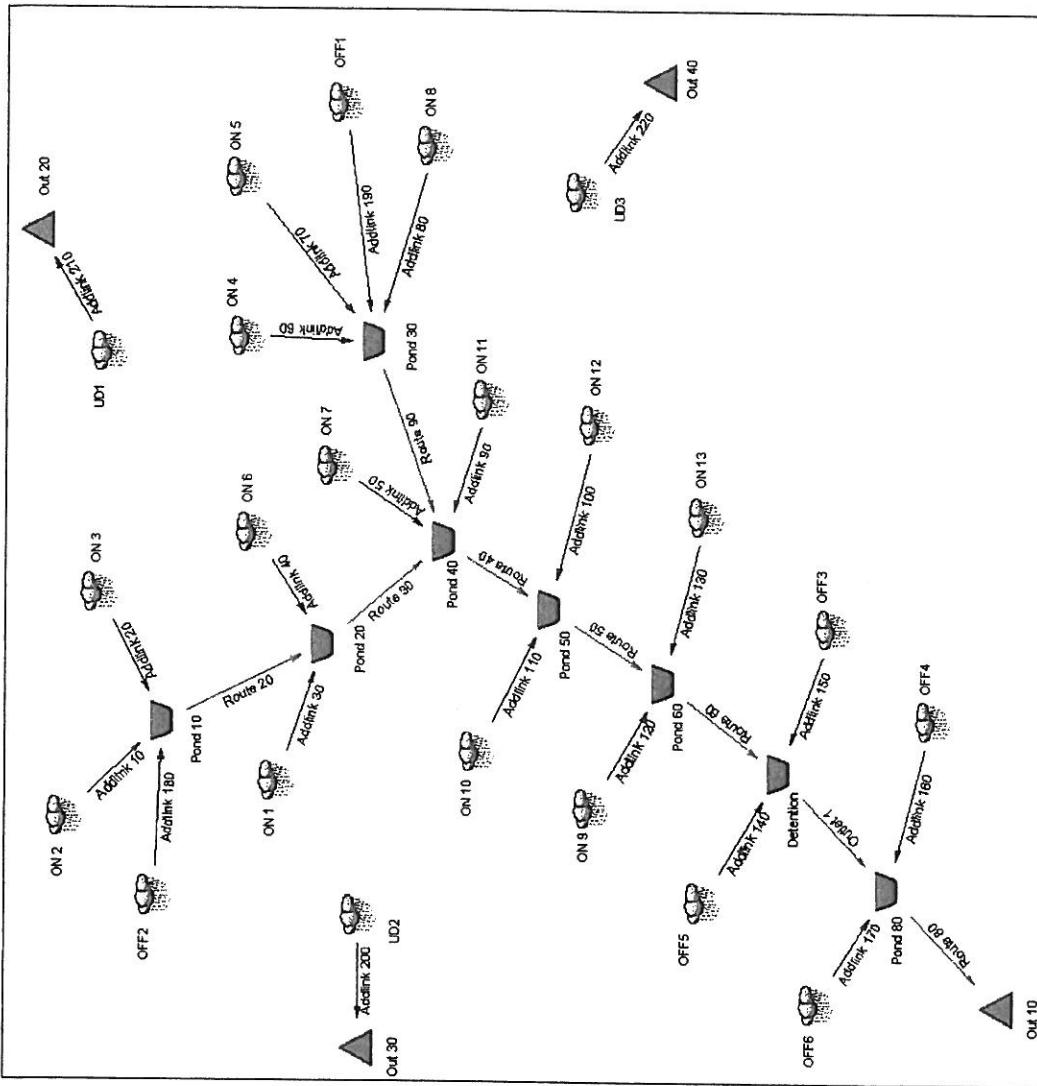

MASTER DESIGN STORM SUMMARY

Network Storm Collection: 07-129Sanctuary

Return Event	Total Depth in	Rainfall Type	RNF ID
10y6hr	1.8700	Synthetic Curve	0-10 1stQ 50%

MASTER NETWORK SUMMARY  
SCS Unit Hydrograph Method

(\*Node=Outfall; +Node=Diversion;  
(Trun= HYG Truncation: Blank=None; L=Left; R=Rt; LR=Left&Rt)

Node ID	Type	Return Event	HYG Vol ac-ft	Trun	Qpeak hrs	Qpeak cfs	Max WSEL ft	Max Pond Storage ac-ft
DETENTION	IN POND	10	9.706	--	2.7000	34.72		
DETENTION	OUT POND	10	9.706		2.7450	33.27	96.65	.180
OFF1	AREA	10	3.086		2.7000	11.27		
OFF2	AREA	10	.147		2.7000	.56		
OFF3	AREA	10	1.356		1.5150	5.33		
OFF4	AREA	10	2.418		1.5300	8.91		
OFF5	AREA	10	.564		1.5150	2.11		
OFF6	AREA	10	2.366		1.5150	8.99		
ON 1	AREA	10	.600		1.5150	2.28		
ON 10	AREA	10	.406		2.7000	1.54		
ON 11	AREA	10	.391		2.7150	1.42		

Type.... Master Network Summary

Page 1.02

Name.... Watershed

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

MASTER NETWORK SUMMARY  
SCS Unit Hydrograph Method

(\*Node=Outfall; +Node=Diversion;  
(Trun= HYG Truncation: Blank=None; L=Left; R=Rt; LR=Left&Rt)

Node ID	Type	Return Event	HYG Vol ac-ft	Trun	Qpeak hrs	Qpeak cfs	Max WSEL ft	Max Pond Storage ac-ft
ON 12	AREA	10	.479	--	2.7150	1.80		
ON 13	AREA	10	.099		2.6850	.37		
ON 2	AREA	10	.260		2.7000	.98		
ON 3	AREA	10	.215		5.9850	.93		
ON 4	AREA	10	.482		2.7300	1.78		
ON 5	AREA	10	.402		2.7000	1.44		
ON 6	AREA	10	.115		2.7000	.44		
ON 7	AREA	10	.260		2.7000	.99		
ON 8	AREA	10	.082		2.7000	.31		
ON 9	AREA	10	.763		1.5150	2.90		
*OUT 10	JCT	10	14.490		2.7150	49.34		
*OUT 20	JCT	10	1.394		2.7000	5.03		
*OUT 30	JCT	10	.933		1.5150	3.55		
*OUT 40	JCT	10	.041		2.6700	.15		
POND 10	IN POND	10	.622		2.7150	2.29		
POND 10	OUT POND	10	.622		2.7150	2.29		
POND 20	IN POND	10	1.337		2.7000	4.76		
POND 20	OUT POND	10	1.337		2.7000	4.76		

Type.... Master Network Summary  
Name.... Watershed

Page 1.03

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

MASTER NETWORK SUMMARY  
SCS Unit Hydrograph Method

(\*Node=Outfall; +Node=Diversion;  
(Trun= HYG Truncation: Blank=None; L=Left; R=Rt; LR=Left&Rt)

Node ID	Type	Return Event	HYG Vol ac-ft	Trun	Qpeak hrs	Qpeak cfs	Max WSEL ft	Max Pond Storage ac-ft
POND 30	IN POND	10	4.051	--	2.7150	14.79		
POND 30	OUT POND	10	4.051		2.7150	14.79		
POND 40	IN POND	10	6.039		2.7150	21.97		
POND 40	OUT POND	10	6.039		2.7150	21.97		
POND 50	IN POND	10	6.924		2.7150	25.30		
POND 50	OUT POND	10	6.924		2.7150	25.30		
POND 60	IN POND	10	7.786		2.7150	28.28		
POND 60	OUT POND	10	7.786		2.7150	28.28		
POND 80	IN POND	10	14.490		2.7150	49.34		
POND 80	OUT POND	10	14.490		2.7150	49.34		
UD1	AREA	10	1.394		2.7000	5.03		
UD2	AREA	10	.933		1.5150	3.55		
UD3	AREA	10	.041		2.6700	.15		

Type.... Tc Calcs  
Name.... OFF1

Page 2.01

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .570000 ft/ft

Avg.Velocity 2.55 ft/sec

Segment #1 Time: .0327 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 2900.00 ft  
Slope .570000 ft/ft  
Unpaved

Avg.Velocity 12.18 ft/sec

Segment #2 Time: .0661 hrs

=====  
Total Tc: .0988 hrs  
=====

Type.... Tc Calcs  
Name.... OFF1

Page 2.02

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:  
 $V = 16.1345 * (Sf^{0.5})$

Paved surface:  
 $V = 20.3282 * (Sf^{0.5})$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... OFF2

Page 2.03

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .230000 ft/ft

Avg.Velocity 1.77 ft/sec

Segment #1 Time: .0470 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 600.00 ft  
Slope .230000 ft/ft  
Unpaved

Avg.Velocity 7.74 ft/sec

Segment #2 Time: .0215 hrs

=====Total Tc: .0685 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs

Type.... Tc Calcs  
Name.... OFF2

Page 2.04

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... OFF3

Page 2.05

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .550000 ft/ft

Avg.Velocity 2.51 ft/sec

Segment #1 Time: .0331 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 900.00 ft  
Slope .550000 ft/ft  
Unpaved

Avg.Velocity 11.97 ft/sec

Segment #2 Time: .0209 hrs

=====

Total Tc: .0540 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs

=====

Type.... Tc Calcs  
Name.... OFF3

Page 2.06

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... OFF4

Page 2.07

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .260000 ft/ft

Avg.Velocity 1.86 ft/sec

Segment #1 Time: .0447 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 2400.00 ft  
Slope .260000 ft/ft  
Unpaved

Avg.Velocity 8.23 ft/sec

Segment #2 Time: .0810 hrs

=====  
Total Tc: .1258 hrs  
=====

Type.... Tc Calcs  
Name.... OFF4

Page 2.08

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... OFF5

Page 2.09

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .370000 ft/ft

Avg.Velocity 2.15 ft/sec

Segment #1 Time: .0388 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 2200.00 ft  
Slope .370000 ft/ft  
Unpaved

Avg.Velocity 9.81 ft/sec

Segment #2 Time: .0623 hrs

=====  
Total Tc: .1011 hrs  
=====

Type.... Tc Calcs  
Name.... OFF5

Page 2.10

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

-----  
Tc Equations used...  
-----

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... OFF6

Page 2.11

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .460000 ft/ft

Avg.Velocity 2.34 ft/sec

Segment #1 Time: .0356 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 1700.00 ft  
Slope .460000 ft/ft  
Unpaved

Avg.Velocity 10.94 ft/sec

Segment #2 Time: .0432 hrs

=====  
Total Tc: .0788 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... ON 1

Page 2.13

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .360000 ft/ft

Avg.Velocity 2.12 ft/sec

Segment #1 Time: .0393 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 1300.00 ft  
Slope .360000 ft/ft  
Unpaved

Avg.Velocity 9.68 ft/sec

Segment #2 Time: .0373 hrs

=====  
Total Tc: .0766 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs  
=====

Type.... Tc Calcs  
Name.... ON 1

Page 2.14

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

-----  
Tc Equations used...  
-----

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .420000 ft/ft

Avg.Velocity 2.26 ft/sec

Segment #1 Time: .0369 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 2000.00 ft  
Slope .420000 ft/ft  
Unpaved

Avg.Velocity 10.46 ft/sec

Segment #2 Time: .0531 hrs

=====  
Total Tc: .0901 hrs  
=====

Type.... Tc Calcs  
Name.... ON 10

Page 2.16

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

==== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8}) / ((P^{0.5}) * (Sf^{0.4})))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

==== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... ON 11

Page 2.17

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .190000 ft/ft

Avg.Velocity 1.64 ft/sec

Segment #1 Time: .0507 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 1900.00 ft  
Slope .190000 ft/ft  
Unpaved

Avg.Velocity 7.03 ft/sec

Segment #2 Time: .0750 hrs

=====  
Total Tc: .1258 hrs  
=====

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{**0.8})) / ((P^{**.5}) * (Sf^{**.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:  
 $V = 16.1345 * (Sf^{**0.5})$

Paved surface:  
 $V = 20.3282 * (Sf^{**0.5})$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .220000 ft/ft

Avg.Velocity 1.74 ft/sec

Segment #1 Time: .0478 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 2100.00 ft  
Slope .220000 ft/ft  
Unpaved

Avg.Velocity 7.57 ft/sec

Segment #2 Time: .0771 hrs

=====  
Total Tc: .1249 hrs  
=====

Type.... Tc Calcs  
Name.... ON 12

Page 2.20

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:  
 $V = 16.1345 * (Sf^{0.5})$

Paved surface:  
 $V = 20.3282 * (Sf^{0.5})$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .410000 ft/ft

Avg.Velocity 2.24 ft/sec

Segment #1 Time: .0373 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 500.00 ft  
Slope .410000 ft/ft  
Unpaved

Avg.Velocity 10.33 ft/sec

Segment #2 Time: .0134 hrs

=====  
Total Tc: .0507 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs  
=====

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

==== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{**0.8}) / ((P^{**.5}) * (Sf^{**.4})))$$

Where: Tc = Time of concentration, hrs  
n = Manning's n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

==== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{**0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{**0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... ON 2

Page 2.23

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .160000 ft/ft

Avg.Velocity 1.53 ft/sec

Segment #1 Time: .0543 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 1000.00 ft  
Slope .160000 ft/ft  
Unpaved

Avg.Velocity 6.45 ft/sec

Segment #2 Time: .0430 hrs

=====  
Total Tc: .0974 hrs  
=====

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)**0.8)) / ((P**.5) * (Sf**.4))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:  
 $V = 16.1345 * (Sf^{0.5})$

Paved surface:  
 $V = 20.3282 * (Sf^{0.5})$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... ON 3

Page 2.25

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .140000 ft/ft

Avg.Velocity 1.45 ft/sec

Segment #1 Time: .0573 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 1680.00 ft  
Slope .140000 ft/ft  
Unpaved

Avg.Velocity 6.04 ft/sec

Segment #2 Time: .0773 hrs

=====  
Total Tc: .1346 hrs  
=====

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{**0.8}) / ((P^{**.5}) * (Sf^{**.4})))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{**0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{**0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... ON 4

Page 2.27

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .220000 ft/ft

Avg.Velocity 1.74 ft/sec

Segment #1 Time: .0478 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 3500.00 ft  
Slope .220000 ft/ft  
Unpaved

Avg.Velocity 7.57 ft/sec

Segment #2 Time: .1285 hrs

=====  
Total Tc: .1763 hrs  
=====

Type.... Tc Calcs  
Name.... ON 4

Page 2.28

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

-----  
Tc Equations used...  
-----

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:  
 $V = 16.1345 * (Sf^{0.5})$

Paved surface:  
 $V = 20.3282 * (Sf^{0.5})$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .200000 ft/ft

Avg.Velocity 1.68 ft/sec

Segment #1 Time: .0497 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 1400.00 ft  
Slope .200000 ft/ft  
Unpaved

Avg.Velocity 7.22 ft/sec

Segment #2 Time: .0539 hrs

=====  
Total Tc: .1036 hrs  
=====

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

-----  
Tc Equations used...  
-----

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... ON 6

Page 2.31

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .370000 ft/ft

Avg.Velocity 2.15 ft/sec

Segment #1 Time: .0388 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 500.00 ft  
Slope .370000 ft/ft  
Unpaved

Avg.Velocity 9.81 ft/sec

Segment #2 Time: .0142 hrs

=====  
Total Tc: .0530 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs

Type.... Tc Calcs  
Name.... ON 6

Page 2.32

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

-----  
Tc Equations used...  
-----

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8}) / ((P^{0.5}) * (Sf^{0.4})))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:  
 $V = 16.1345 * (Sf^{0.5})$

Paved surface:  
 $V = 20.3282 * (Sf^{0.5})$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... ON 7

Page 2.33

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .480000 ft/ft

Avg.Velocity 2.38 ft/sec

Segment #1 Time: .0350 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 600.00 ft  
Slope .480000 ft/ft  
Unpaved

Avg.Velocity 11.18 ft/sec

Segment #2 Time: .0149 hrs

=====  
Total Tc: .0499 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs

Type.... Tc Calcs  
Name.... ON 8

Page 2.35

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .230000 ft/ft

Avg.Velocity 1.77 ft/sec

Segment #1 Time: .0470 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 900.00 ft  
Slope .230000 ft/ft  
Unpaved

Avg.Velocity 7.74 ft/sec

Segment #2 Time: .0323 hrs

=====  
Total Tc: .0793 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs  
=====

Type.... Tc Calcs  
Name.... ON 8

Page 2.36

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .410000 ft/ft

Avg.Velocity 2.24 ft/sec

Segment #1 Time: .0373 hrs

Segment #2: Tc: TR-55 Shallow

Hydraulic Length 1400.00 ft  
Slope .410000 ft/ft  
Unpaved

Avg.Velocity 10.33 ft/sec

Segment #2 Time: .0376 hrs

=====  
Total Tc: .0749 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs  
=====

Type.... Tc Calcs  
Name.... ON 9

Page 2.38

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... UD1

Page 2.39

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .300000 ft/ft

Avg.Velocity 1.97 ft/sec

Segment #1 Time: .0422 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 900.00 ft  
Slope .300000 ft/ft  
Unpaved

Avg.Velocity 8.84 ft/sec

Segment #2 Time: .0283 hrs

=====  
Total Tc: .0705 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs

Type.... Tc Calcs  
Name.... UD1

Page 2.40

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8}) / ((P^{0.5}) * (Sf^{0.4})))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:  
 $V = 16.1345 * (Sf^{0.5})$

Paved surface:  
 $V = 20.3282 * (Sf^{0.5})$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Tc Calcs  
Name.... UD2

Page 2.41

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .600000 ft/ft

Avg.Velocity 2.60 ft/sec

Segment #1 Time: .0320 hrs

=====  
Total Tc: .0320 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs  
=====

Type.... Tc Calcs  
Name.... UD2

Page 2.42

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

Type.... Tc Calcs  
Name.... UD3

Page 2.43

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

:::::::::::::::::::  
TIME OF CONCENTRATION CALCULATOR  
:::::::::::::::::::

-----  
Segment #1: Tc: TR-55 Sheet

Mannings n .0300  
Hydraulic Length 300.00 ft  
2yr, 24hr P 2.4200 in  
Slope .350000 ft/ft

Avg.Velocity 2.10 ft/sec

Segment #1 Time: .0397 hrs

-----  
Segment #2: Tc: TR-55 Shallow

Hydraulic Length 600.00 ft  
Slope .350000 ft/ft  
Unpaved

Avg.Velocity 9.55 ft/sec

Segment #2 Time: .0175 hrs

=====  
Total Tc: .0572 hrs

Calculated Tc < Min.Tc:  
Use Minimum Tc...  
Use Tc = .0833 hrs

=====

Type.... Tc Calcs  
Name.... UD3

Page 2.44

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

Tc Equations used...

==== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

==== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:

$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

Type.... Runoff CN-Area  
Name.... OFF1

Page 3.01

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C %UC	Adjusted CN
poor	80	107.200		80.00
poor	58	107.200		58.00

COMPOSITE AREA & WEIGHTED CN --> 214.400 69.00 (69)

Type.... Runoff CN-Area  
Name.... OFF2

Page 3.02

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	73	7.500			73.00
poor	58	7.500			58.00

COMPOSITE AREA & WEIGHTED CN ---> 15.000 65.50 (66)  
::

Type.... Runoff CN-Area  
Name.... OFF3

Page 3.03

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C %UC	Adjusted CN
Paved parking lots, roofs, driveway poor	98 73	2.050 53.850		98.00 73.00

COMPOSITE AREA & WEIGHTED CN ---> 55.900 73.92 (74)

Type.... Runoff CN-Area  
Name.... OFF4

Page 3.04

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious %C	Adjustment %UC	Adjusted CN
poor	73	109.700			73.00

COMPOSITE AREA & WEIGHTED CN ---> 109.700 73.00 (73)  
::

Type.... Runoff CN-Area  
Name.... OFF5

Page 3.05

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C      %UC	Adjusted CN
poor	73	25.600		73.00

COMPOSITE AREA & WEIGHTED CN --->            25.600            73.00 (73)

Type.... Runoff CN-Area  
Name.... OFF6

Page 3.06

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C %UC	Adjusted CN
Paved parking lots, roofs, driveway poor	98 73	1.810 105.490		98.00 73.00

COMPOSITE AREA & WEIGHTED CN ---> 107.300 73.42 (73)

Type.... Runoff CN-Area  
Name.... ON 1

Page 3.07

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C      %UC	Adjusted CN
poor	73	27.200		73.00

COMPOSITE AREA & WEIGHTED CN --->                  27.200                  73.00 (73)  
::

Type.... Runoff CN-Area  
Name.... ON 10

Page 3.08

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	73	20.700			73.00
poor	58	20.700			58.00

COMPOSITE AREA & WEIGHTED CN ---> 41.400 65.50 (66)  
::

Type.... Runoff CN-Area  
Name.... ON 11

Page 3.09

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C %UC	Adjusted CN
Paved parking lots, roofs, driveway poor	98 80	1.280 6.370		98.00 80.00
poor	73	6.370		73.00
poor	58	13.170		58.00

-----

COMPOSITE AREA & WEIGHTED CN ---> 27.190 68.55 (69)  
::

Type.... Runoff CN-Area  
Name.... ON 12

Page 3.10

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
Paved parking lots, roofs, driveway poor	98	6.140			98.00
poor	73	9.160			73.00
poor	58	41.110			58.00

-----

COMPOSITE AREA & WEIGHTED CN ---> 56.410 64.79 (65)  
::

Type.... Runoff CN-Area  
Name.... ON 13

Page 3.11

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious Adjustment	Adjusted CN
	%C	%UC		
poor	73	5.050		73.00
poor	58	5.050		58.00

-----

COMPOSITE AREA & WEIGHTED CN ---> 10.100 65.50 (66)  
::

Type.... Runoff CN-Area  
Name.... ON 2

Page 3.12

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	73	13.250			73.00
poor	58	13.250			58.00

-----

COMPOSITE AREA & WEIGHTED CN ---> 26.500 65.50 (66)  
::

Type.... Runoff CN-Area  
Name.... ON 3

Page 3.13

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	73	10.550			73.00
poor	58	31.650			58.00

COMPOSITE AREA & WEIGHTED CN ---> 42.200 61.75 (62)  
::

Type.... Runoff CN-Area  
Name.... ON 4

Page 3.14

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	73	24.550			73.00
poor	58	24.550			58.00

COMPOSITE AREA & WEIGHTED CN ---> 49.100 65.50 (66)

Type.... Runoff CN-Area  
Name.... ON 5

Page 3.15

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	80	8.300			80.00
poor	73	8.300			73.00
poor	58	8.300			58.00

COMPOSITE AREA & WEIGHTED CN ---> 24.900 70.33 (70)  
::

Type.... Runoff CN-Area  
Name.... ON 6

Page 3.16

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	73	5.850			73.00
poor	58	5.850			58.00

COMPOSITE AREA & WEIGHTED CN ---> 11.700 65.50 (66)  
::

Type.... Runoff CN-Area  
Name.... ON 7

Page 3.17

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
Paved parking lots, roofs, driveway poor	98 73	.115 13.200			98.00 73.00
poor	58	13.200			58.00

COMPOSITE AREA & WEIGHTED CN ---> 26.515 65.64 (66)  
::

Type.... Runoff CN-Area  
Name.... ON 8

Page 3.18

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious %C	Adjustment %UC	Adjusted CN
Paved parking lots, roofs, driveway	98	.115			98.00
poor	80	2.830			80.00
poor	58	8.370			58.00

-----

COMPOSITE AREA & WEIGHTED CN ---> 11.315 63.91 (64)  
::

Type.... Runoff CN-Area  
Name.... ON 9

Page 3.19

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C %UC	Adjusted CN
Paved parking lots, roofs, driveway poor	98 73	.115 34.490		98.00 73.00

-----

COMPOSITE AREA & WEIGHTED CN ---> 34.605 73.08 (73)

::

Type.... Runoff CN-Area  
Name.... UD1

Page 3.20

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

::

Soil/Surface Description	CN	Area acres	Impervious		Adjusted CN
			%C	%UC	
poor	80	28.800			80.00
poor	73	28.800			73.00
poor	58	28.800			58.00

COMPOSITE AREA & WEIGHTED CN --->                    86.400                    70.33 (70)  
::

Type.... Runoff CN-Area  
Name.... UD2

Page 3.21

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPON.D.PW

RUNOFF CURVE NUMBER DATA

::

-----  

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C %UC	Adjusted CN
poor	73	42.300		73.00

-----

COMPOSITE AREA & WEIGHTED CN ---> 42.300 73.00 (73)  
:::

Type.... Runoff CN-Area  
Name.... UD3

Page 3.22

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

RUNOFF CURVE NUMBER DATA

Soil/Surface Description	CN	Area acres	Impervious Adjustment %C %UC	Adjusted CN
Paved parking lots, roofs, driveway poor poor	98 85 58	.230 .935 3.035		98.00 85.00 58.00

COMPOSITE AREA & WEIGHTED CN ---> 4.200 66.20 (66)

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPPOND.PPW

Elevation (ft)	Planimeter (sq.in)	Area (sq.ft)	A1+A2+sqr(A1*A2) (sq.ft)	Volume (ac-ft)	Volume Sum (ac-ft)
94.00	-----	1742	0	.000	.000
95.00	-----	2597	6466	.049	.049
96.00	-----	3609	9267	.071	.120
97.00	-----	4778	12540	.096	.216
98.00	-----	6105	16284	.125	.341

POND VOLUME EQUATIONS

\* Incremental volume computed by the Conic Method for Reservoir Volumes.

Volume = (1/3) \* (EL2-EL1) \* (Areal + Area2 + sq.rt.(Areal\*Area2))

where: EL1, EL2 = Lower and upper elevations of the increment  
Areal,Area2 = Areas computed for EL1, EL2, respectively  
Volume = Incremental volume between EL1 and EL2

Type.... Outlet Input Data  
Name.... Outlet 1

Page 5.01

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPPOND.PPW

REQUESTED POND WS ELEVATIONS:

Min. Elev.= 94.00 ft  
Increment = .10 ft  
Max. Elev.= 98.00 ft

\*\*\*\*\*  
OUTLET CONNECTIVITY  
\*\*\*\*\*

--> Forward Flow Only (UpStream to DnStream)  
<-- Reverse Flow Only (DnStream to UpStream)  
<--> Forward and Reverse Both Allowed

Structure	No.	Outfall	E1, ft	E2, ft
Orifice-Circular	---	--->	TW	94.000 98.000
TW SETUP, DS Channel				

Type.... Outlet Input Data  
Name.... Outlet 1

Page 5.02

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPOND.PPW

OUTLET STRUCTURE INPUT DATA

Structure ID =  
Structure Type = Orifice-Circular  
-----  
# of Openings = 6  
Invert Elev. = 94.00 ft  
Diameter = 1.0000 ft  
Orifice Coeff. = .600

Structure ID = TW  
Structure Type = TW SETUP, DS Channel  
-----  
FREE OUTFALL CONDITIONS SPECIFIED

CONVERGENCE TOLERANCES...  
Maximum Iterations= 30  
Min. TW tolerance = .01 ft  
Max. TW tolerance = .01 ft  
Min. HW tolerance = .01 ft  
Max. HW tolerance = .01 ft  
Min. Q tolerance = .10 cfs  
Max. Q tolerance = .10 cfs

## Appendix C

### Existing Pond Pack Summary

## MASTER DESIGN STORM SUMMARY

Network Storm Collection: 07-129Sanctuary

Return Event	Total Depth in	Rainfall Type	RNF ID
10y6hr	1.8700	Synthetic Curve	0-10 1stQ 50%

MASTER NETWORK SUMMARY  
SCS Unit Hydrograph Method

(\*Node=Outfall; +Node=Diversion;  
(Trun= HYG Truncation: Blank=None; L=Left; R=Rt; LR=Left&Rt)

Node ID	Type	Return Event	HYG Vol ac-ft	Trun	Qpeak hrs	Qpeak cfs	Max WSEL ft	Max Pond Storage ac-ft
DETENTION	IN POND	10	9.306	--	2.7000	33.31		
DETENTION	OUT POND	10	9.306		2.7000	33.31		
OFF1	AREA	10	3.086		2.7000	11.27		
OFF2	AREA	10	.147		2.7000	.56		
OFF3	AREA	10	1.232		1.5150	4.69		
OFF4	AREA	10	2.418		1.5300	8.91		
OFF5	AREA	10	.564		1.5150	2.11		
OFF6	AREA	10	2.366		1.5150	8.99		
ON 1	AREA	10	.600		1.5150	2.28		
ON 10	AREA	10	.406		2.7000	1.54		
ON 11	AREA	10	.305		2.7150	1.14		

MASTER NETWORK SUMMARY  
SCS Unit Hydrograph Method

(\*Node=Outfall; +Node=Diversion;)  
(Trun= HYG Truncation: Blank=None; L=Left; R=Rt; LR=Left&Rt)

Node ID	Type	Return Event	HYG Vol ac-ft	Trun	Qpeak hrs	Qpeak cfs	Max WSEL ft	Max Pond Storage ac-ft
ON 12	AREA	10	.288	--	5.9850	1.25		
ON 13	AREA	10	.099		2.6850	.37		
ON 2	AREA	10	.260		2.7000	.98		
ON 3	AREA	10	.215		5.9850	.93		
ON 4	AREA	10	.482		2.7300	1.78		
ON 5	AREA	10	.402		2.7000	1.44		
ON 6	AREA	10	.115		2.7000	.44		
ON 7	AREA	10	.260		2.7000	.99		
ON 8	AREA	10	.082		2.7000	.31		
ON 9	AREA	10	.763		1.5150	2.90		
*OUT 10	JCT	10	14.090		2.7000	49.58		
*OUT 20	JCT	10	1.394		2.7000	5.03		
*OUT 30	JCT	10	.933		1.5150	3.55		
*OUT 40	JCT	10	.030		2.6850	.11		
POND 10	IN POND	10	.622		2.7150	2.29		
POND 10	OUT POND	10	.622		2.7150	2.29		
POND 20	IN POND	10	1.337		2.7000	4.76		
POND 20	OUT POND	10	1.337		2.7000	4.76		

MASTER NETWORK SUMMARY  
SCS Unit Hydrograph Method

(\*Node=Outfall; +Node=Diversion;)  
(Trun= HYG Truncation: Blank=None; L=Left; R=Rt; LR=Left&Rt)

Node ID	Type	Return Event	HYG Vol ac-ft	Trun	Qpeak hrs	Qpeak cfs	Max WSEL ft	Pond Storage ac-ft
POND 30	IN POND	10	4.051	--	2.7150	14.79		
POND 30	OUT POND	10	4.051		2.7150	14.79		
POND 40	IN POND	10	5.953		2.7150	21.68		
POND 40	OUT POND	10	5.953		2.7150	21.68		
POND 50	IN POND	10	6.647		2.7150	24.23		
POND 50	OUT POND	10	6.647		2.7150	24.23		
POND 60	IN POND	10	7.509		2.7150	27.20		
POND 60	OUT POND	10	7.509		2.7150	27.20		
POND 80	IN POND	10	14.090		2.7000	49.58		
POND 80	OUT POND	10	14.090		2.7000	49.58		
UD1	AREA	10	1.394		2.7000	5.03		
UD2	AREA	10	.933		1.5150	3.55		
UD3	AREA	10	.030		2.6850	.11		

File.... N:\2007\07-129 Golden Eagle- The Sanctuary\Hydrology\PondPack\07-129SWPPPON.D.PW

Tc Equations used...

===== SCS TR-55 Sheet Flow =====

$$Tc = (.007 * ((n * Lf)^{0.8})) / ((P^{0.5}) * (Sf^{0.4}))$$

Where: Tc = Time of concentration, hrs  
n = Mannings n  
Lf = Flow length, ft  
P = 2yr, 24hr Rain depth, inches  
Sf = Slope, %

===== SCS TR-55 Shallow Concentrated Flow =====

Unpaved surface:

$$V = 16.1345 * (Sf^{0.5})$$

Paved surface:


$$V = 20.3282 * (Sf^{0.5})$$

$$Tc = (Lf / V) / (3600sec/hr)$$

Where: V = Velocity, ft/sec  
Sf = Slope, ft/ft  
Tc = Time of concentration, hrs  
Lf = Flow length, ft

# Appendix D

## Drainage Basin Map

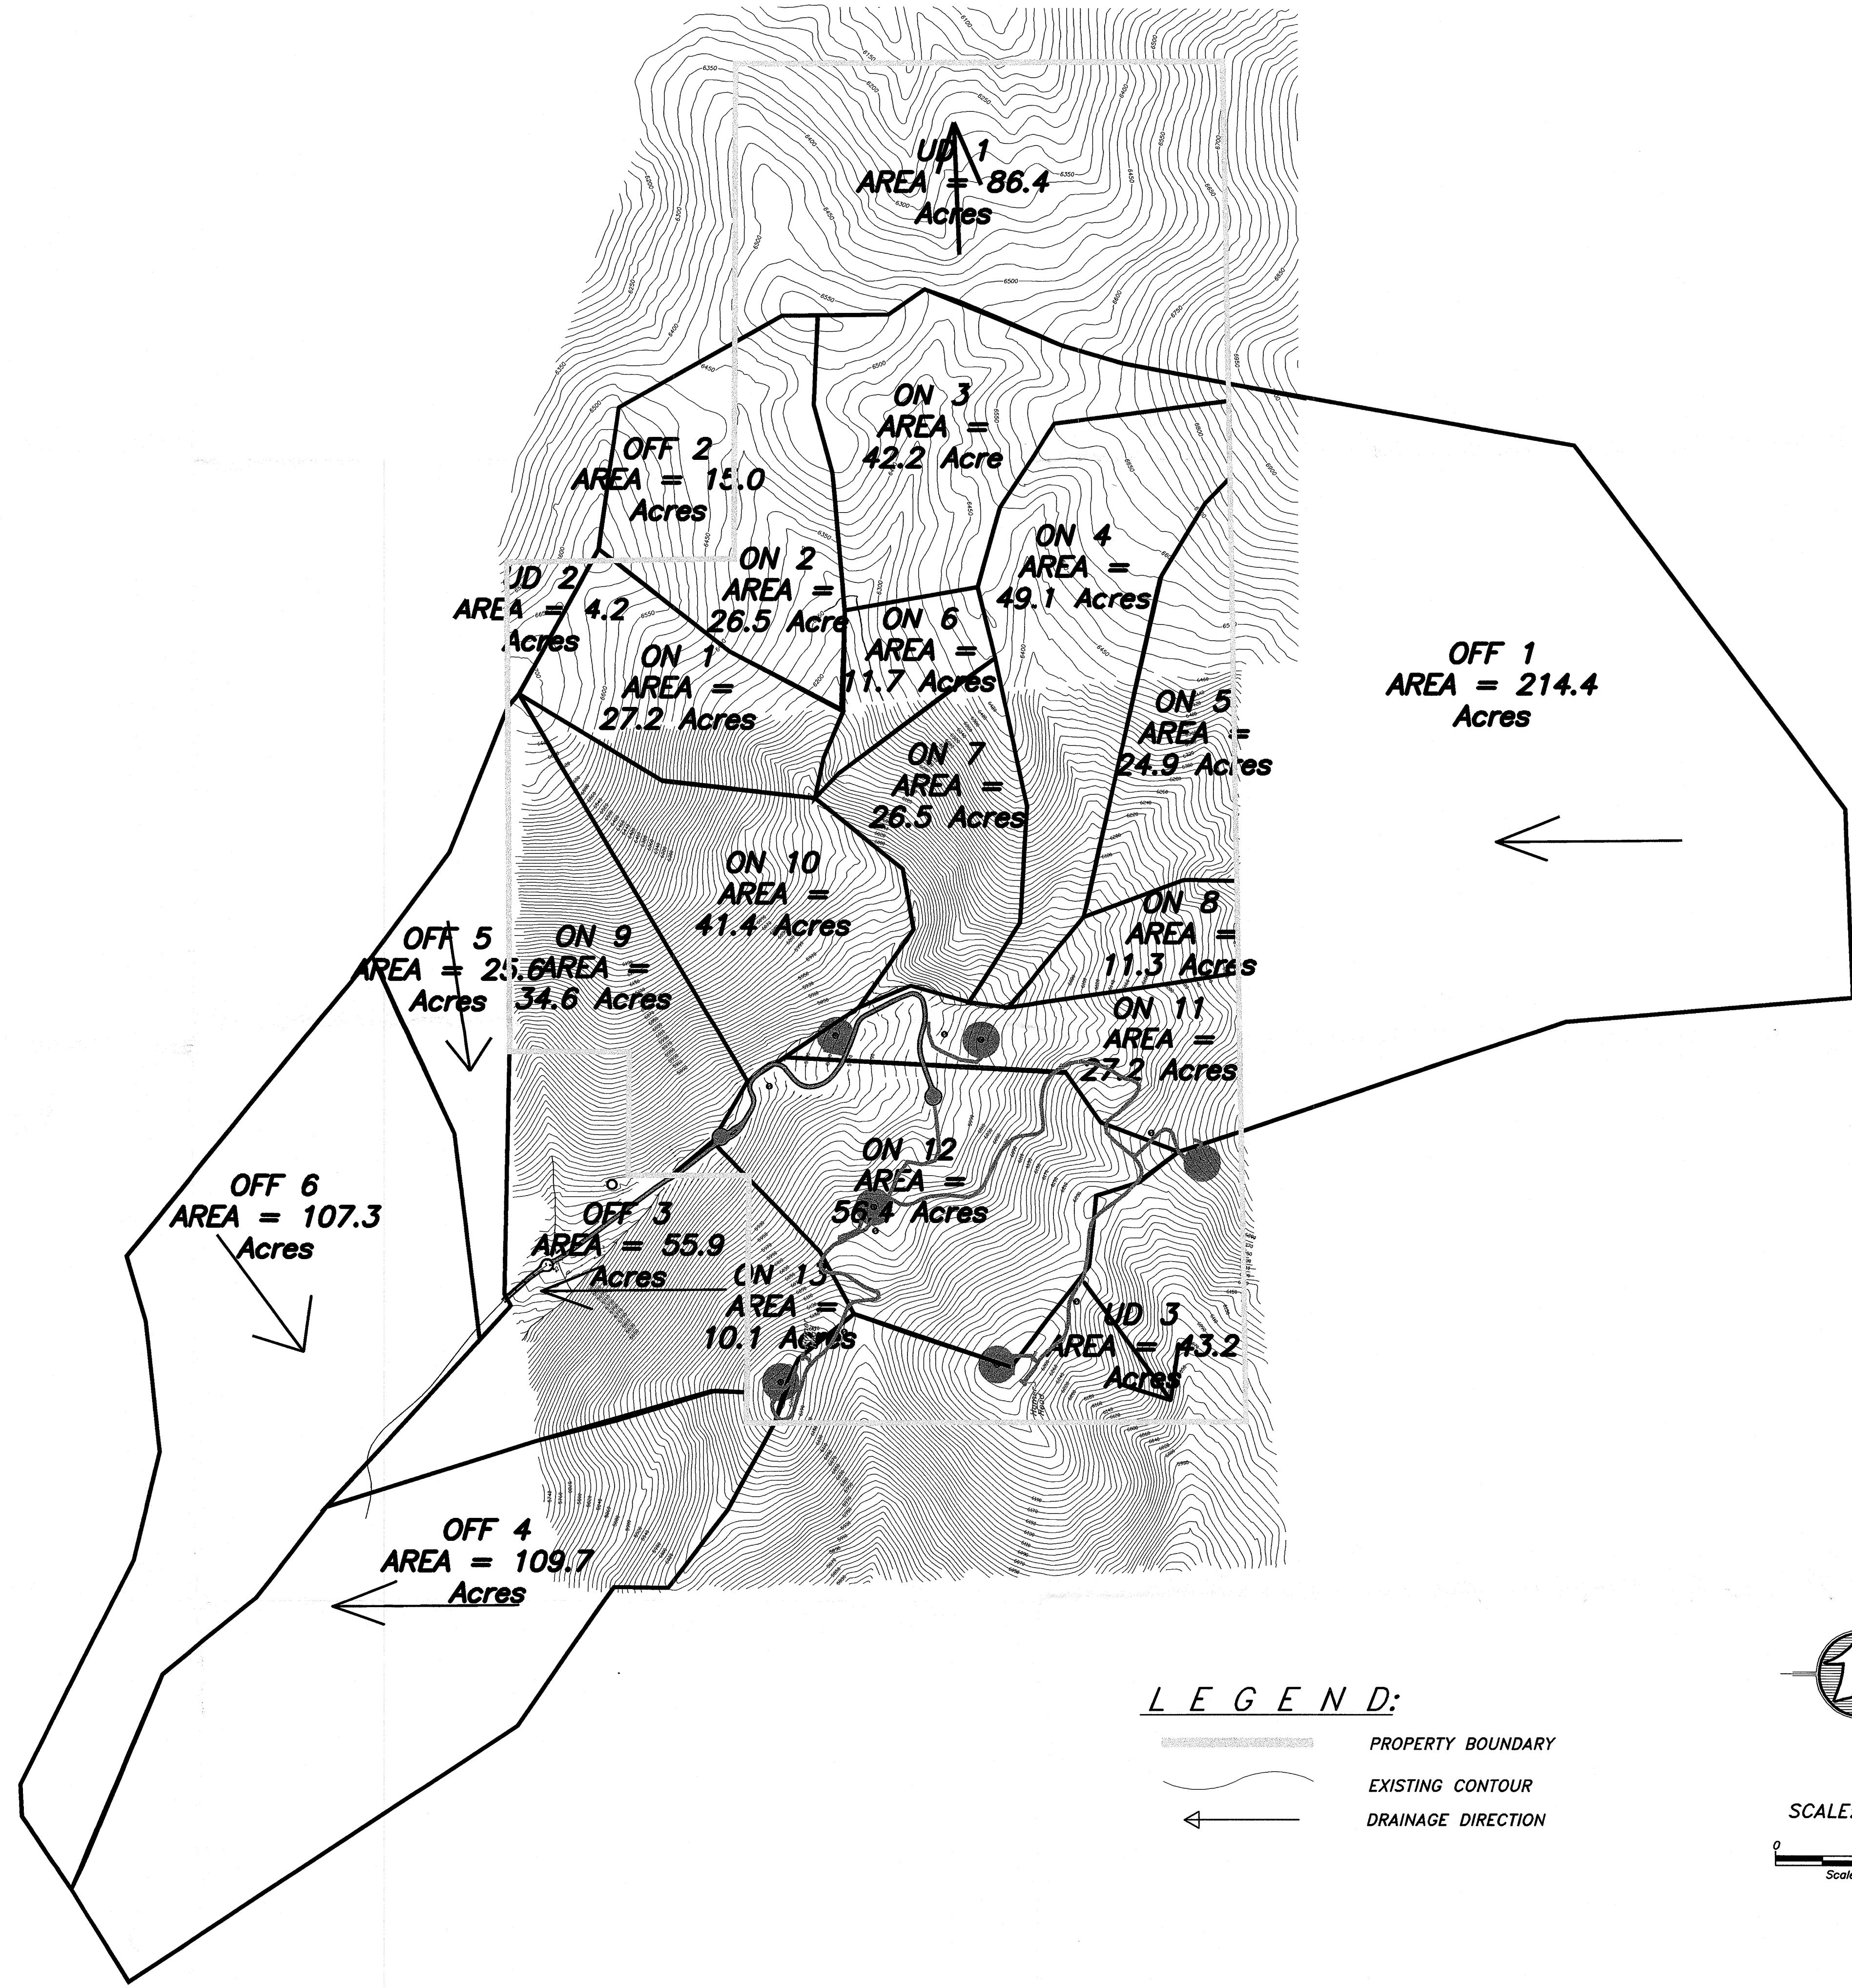

## THE SANCTUARY

A PART OF SECTION 3 & 4, T6N, R2E, AND  
A PART OF SECTION 34, T7N, R2E, SLB&W  
WEBER COUNTY, UTAH

SHEET


1

OF


2

Sheets

Drawn By: NMB Date: 9/29/10  
Checked By:  
Approved By:  
Scale: 1"=500'  
Drawing File: 07-129 DRAINAGE  
JOB NUMBER: 07-129

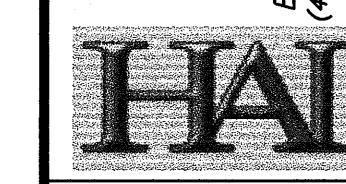

HANSEN & ASSOCIATES, INC.  
Consulting Engineers and Land Surveyors  
538 North Main Street, Brigham, Utah 84302  
Visit us at [www.hales.net](http://www.hales.net)  
Brigham City Ogden Logan  
(435) 723-3491 (801) 399-4605 (435) 722-8272  
No. Date By Revision

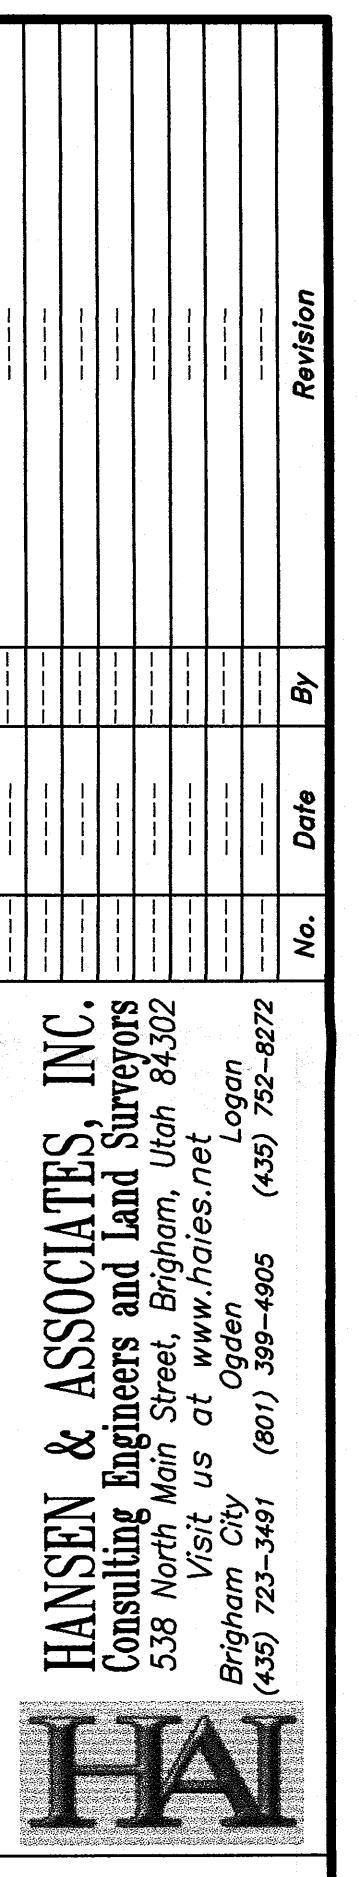

**HAI**

Drawn By: MAB	Date: 9/29/10
Designed By:	
Checked By:	
Approved By:	
Scale: 1"=200'	
Drawing File: 07-129_DRAINAGE	
Job Number: 07-129	

## THE SANCTUARY

A PART OF SECTION 3 & 4, T8N, R2E, AND  
A PART OF SECTION 34, T8N, R2E, SL&M  
WEBER COUNTY, UTAH

SHEET 2 OF 2 SHEETS

