


VICINITY MAP
Not to Scale

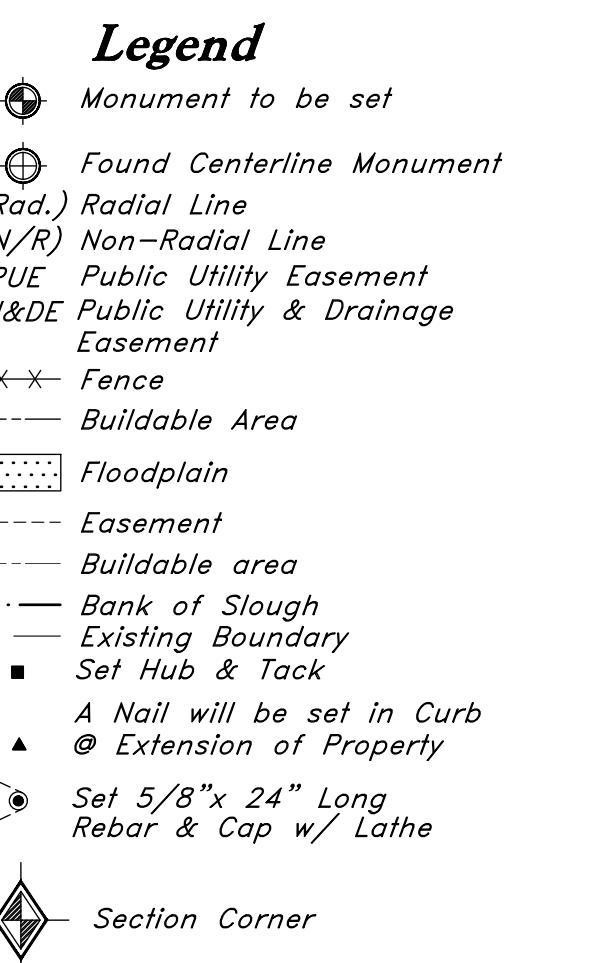

NOTES

- 10' Public Utility and Drainage Easements along the Front Property line and across all of Parcels A-H.
- Due to the topography, and the location of this subdivision all owners will be responsible for removing water runoff from the road adjacent to this property until curb and gutter is installed.
- Lowest Finished Floor Elevation (LFFE) to be a maximum of 3.0' below Existing Grade or 4.0' below the Top Back of curb at the Lowest corner of the lot whichever is higher.

BENCHMARK

Brass Cap Section Monument located in the South East Quarter Corner of Section 16, T6N, R2W, SLB&M, U.S. (Found Brass Cap Monument in good condition dated 1963).

Found Reference monument to the Southeast corner of Section 16, T6N, R2W, SLB&M, U.S. Survey (Found Brass Cap Monument in good condition dated 1963)

Calculated Southeast corner of Section 16, T6N, R2W, SLB&M, U.S. Survey (Calculated using the Found Reference Monument)

Together with:

A part of the Southeast corner of Section 16 and the Southwest Quarter of Section 15, Township 6 North Range 2 West, Salt Lake Base and Meridian,


Beginning at a point on the Southeast corner of Open Space G, Riverbend Farms Phase 1 said point being 278.56 feet South 89°19'36" East along the Calculated Section Line and 868.69 feet North 0°40'24" East from the Southeast corner of said Section; and running thence South 89°07'36" West 628.47 feet to the Southeast corner of Riverbend Farms Phase 1; thence nine (9) courses along the Eastern Boundary of said Phase 1 as follows: (1) North 12°05'54" East 116.50 feet to a point of non-tangent curvature, (2) Southeast along the arc of a 333.00 foot radius curve to the left a distance of 58.14 feet (Central Angle equals 10°00'12" and Long Chord bears South 82°52'58" East 58.07 feet); (4) North 09°59'56" East 332.82 feet; (5) North 10°08'45" East 247.85 feet; (6) North 10°09'12" East 242.74 feet; (7) North 07°24'45" East 66.00 feet; (8) North 82°37'58" West 51.23 feet; and (9) North 07°22'02" East 104.62 feet; thence South 81°52'12" East 169.95 feet; thence South 83°35'30" East 443.95 feet to a point on the West boundary line of Open Space G; thence South 09°32'27" West 1091.06 feet along said West Boundary line to the Point of Beginning.

Containing 34.303 acres, more or less.

Together with:

Beginning at a point on a corner of Open Space G, Riverbend Farms Phase 1 said point being 633.05 feet South 89°19'36" East along the Calculated Section Line and 2037.60 feet North 0°40'24" East from the Southeast corner of said Section; and running thence four (4) courses along the West and North Boundaries of said Parcel G as follows: (1) North 00°43'36" East 10.00 feet; (2) South 89°16'24" East 52.52 feet; (3) North 04°50'20" East 304.09 feet; and (4) North 85°09'40" West 230.87 feet; thence North 04°50'20" East 129.02 feet; thence North 07°17'55" East 251.26 feet; thence North 05°35'21" East 791.88 feet; thence North 88°00'25" East 307.05 feet; thence South 60°01'10" East 624.80 feet; thence South 07°11'23" West 222.70 feet; thence North 85°00'25" West 150.61 feet to a point on a non-tangent curve to the left having a radius of 265.80 feet; thence along said arc a distance of 170.99 feet; Central Angle equals 36°51'31" and Long Chord bears South 72°18'54" West 168.06 feet to a point of non-tangency; thence South 00°10'46" West 184.50 feet; thence South 00°28'27" West 102.35 feet to a point of intersection to the left having a radius of 100.00 feet; thence South 00°10'46" West 140.66 feet; Central Angle equals 80°16'36" and Long Chord bears South 00°10'46" West 129.34 feet; thence South 40°08'55" East 107.11 feet; thence South 56°17'58" East 85.63 feet; thence South 56°36'08" East 107.75 feet; thence South 47°45'12" East 14.77 feet; thence South 00°09'34" West 403.63 feet; thence North 89°16'24" West 526.00 feet to the POINT OF BEGINNING.

Riverbend Farms Phase 1 Open Space G

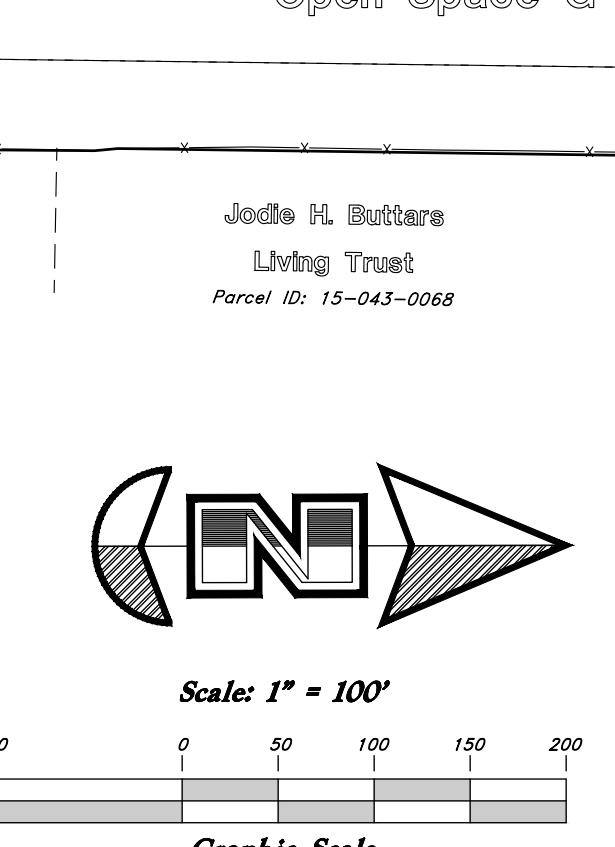

WEBER COUNTY COMMISSION ACCEPTANCE

This is to certify that this subdivision plat, the dedication of streets and other public ways and financial guarantees of public improvements associated with this subdivision, thereon are hereby approved and accepted by the Commissioners of Weber County, Utah. Signed this _____ day of _____, 2024.

Chairman, Weber County Commission

Attest:

Title:

AGRICULTURAL NOTE

Agriculture is the preferred use in the agricultural zones. Agricultural operations as specified in the Land Use Code for a particular zone are permitted at any time including the operation of farm machinery and no allowed agricultural use shall be subject to restrictions on the basis that it interferes with activities of future residents of this subdivision.

WEBER COUNTY SURVEYOR

I hereby certify that the Weber County Surveyor's Office has reviewed this plat and all corrections for approval by this office have been submitted. I further certify that the Weber County Surveyor does not relieve the Licensed Land Surveyor who executed this plat from the responsibilities and/or liabilities associated therewith. Signed this _____ day of _____, 2024.

Weber County Surveyor

WEBER COUNTY PLANNING COMMISSION APPROVAL

This is to certify that this subdivision plat was duly approved by the Weber County Planning Commission. Signed this _____ day of _____, 2024.

Chairman, Weber County Planning Commission

WEBER COUNTY ENGINEER


I hereby certify that the required public improvements contained in this subdivision plat and its accompanying drawings for this subdivision conform with County standards and the amount of the financial guarantee is sufficient for the installation of these improvements. Signed this _____ day of _____, 2024.

Weber County Engineer

WEBER COUNTY ATTORNEY

I have examined the financial guarantee and other documents associated with this subdivision plat and in my opinion they conform with the County Ordinance applicable thereto and now in force and affect. Signed this _____ day of _____, 2024.

Weber County Attorney

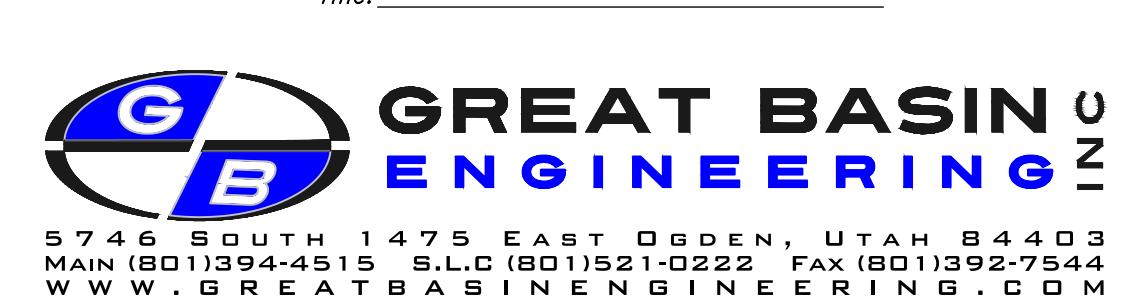

5746 SOUTH 1475 EAST OGDEN, UTAH 84403
MAIN (801)394-4515 SLC (801)521-0222 FAX (801)754-7544
WWW.GREATBASINENGINEERING.COM

Riverbend Farms Phase 2

A Cluster Subdivision
A part of Section 15 and Section 16, T6N, R2W, SLB&M, U.S. Survey,
Weber County, Utah
February 2024

SURVEYOR'S CERTIFICATE

I, Andy Hubbard, do hereby certify that I am a Professional Land Surveyor in the State of Utah, and that I hold Licence No. 6242920 in accordance with Title 58, Chapter 22, of the Professional Engineers and Professional Land Surveyors Licensing Act. I also certify that I have completed a survey of the property described herein in accordance with Section 17-23-17 and that I have verified all measurements shown hereon this plat of Riverbend Farms Phase 2 in Weber County, Utah and that it has been correctly drawn to the designated scale and is a true and correct representation of the following description of lands included in said subdivision, based on data compiled from records in the Weber County Recorder's Office. Monuments have been found or placed as represented on this plat. I furthermore certify that all lots within this Subdivision hereby meet all current lot width and area requirements of the Weber County Zoning Ordinance.

Signed this _____ day of _____, 2024

6242920
License No. Andy Hubbard

OWNERS DEDICATION


We the undersigned owners of the herein described tract of land, do hereby set apart and subdivide the same into lots and streets as shown on the plat and name said tract Riverbend Farms Phase 2 Subdivision and do hereby dedicate and grant to Weber County a perpetual right and easement on and over the agriculture preservation parcel L, to guarantee to Weber County that the agriculture preservation parcels remain open and undeveloped except as approved by the recreational, Secondary Water and storm water purposes to be used as open space parcels for agriculture preservation, Secondary Water and storm water purposes, and also do grant and dedicate a perpetual right and easement over, upon and under the lands designated herein as Common Open Space and/or public utility easements, the same to be used for the maintenance and operation of Sanitary Sewer lines and Structures, Storm Drainage Lines and Structures and/or public utility service lines and storm drainage facilities, whichever is applicable as may be authorized by the governing authority, we also dedicate and grant to Weber County, all those parts or portions of said tract designated as Trail Easement, the same to be used as a public trail for pedestrian ingress and egress as may be authorized by the governing authority.

We also grant and dedicate a perpetual right and easement over, upon and under the lands designated hereof as public utility and drainage easements the same to be used for the installation, maintenance and operation of public utility service lines, storm drainage facilities, irrigation canals or for the perpetual preservation of water channels in their natural state whichever is applicable as may be authorized by the governing authority, with no buildings or structures being erected within such easements; and further dedicate to public use all those parts or portions of said tract of land designated as streets, the same to be used as public thoroughfares.

Signed this _____ Day of _____, 2024.

Riverbend Holdings, LLC -

Bryan Bayless -
5617 South 1475 East,
SOUTH OGDEN UT 84403

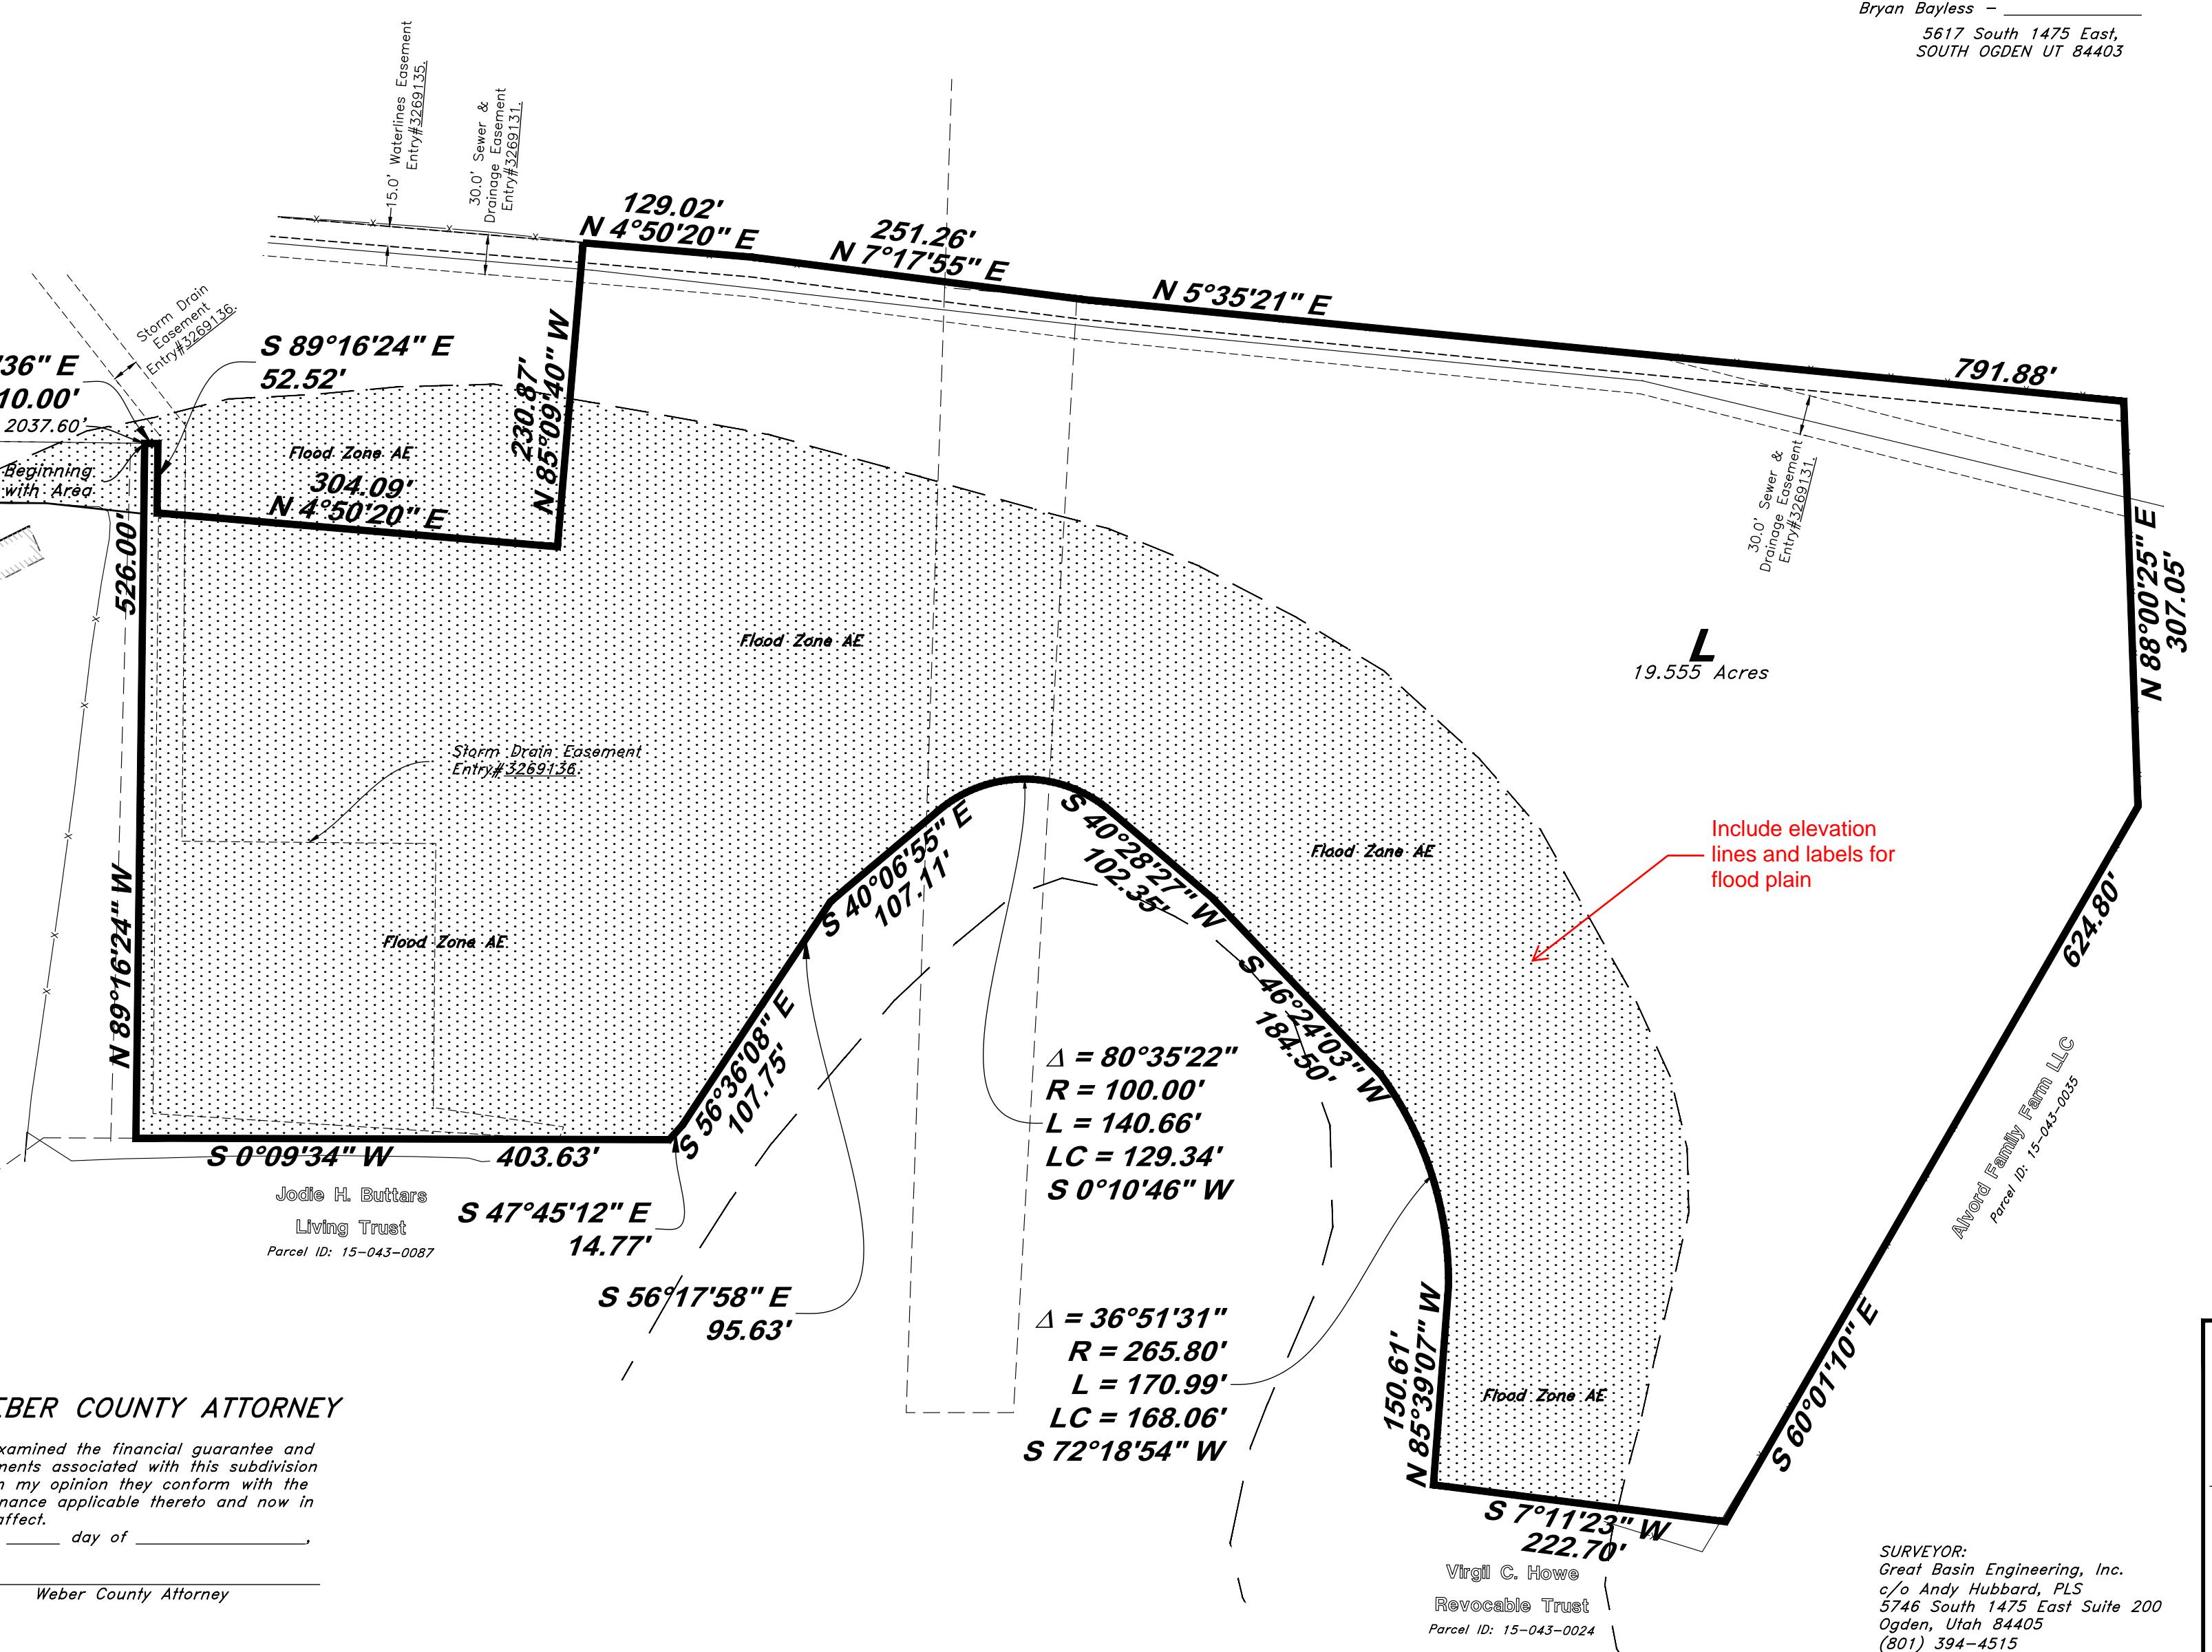


Riverbend Farms Phase 2

A Cluster Subdivision

A part of Section 15 and Section 16, T6N, R2W, SLB&M, U.S. Survey,
Weber County, Utah

February 2024


Curve #	Delta	Radius	Length	Chord Direction	Chord Length
C1	10°00'12"	333.00'	58.14'	S 82°52'58" E	58.07'
C2	2°59'20"	333.00'	17.37'	S 89°22'44" E	17.37'
C3	96°19'02"	10.50'	17.65'	S 42°42'53" E	15.64'
C4	7°13'09"	407.85'	51.39'	S 2°17'07" W	51.35'
C5	9°03'07"	400.00'	63.19'	N 3°39'09" E	63.13'
C6	1°20'58"	400.00'	9.42'	N 8°51'12" E	9.42'
C7	84°40'38"	10.50'	15.52'	N 54°32'04" E	14.14'
C8	84°39'14"	10.50'	15.51'	N 35°27'56" W	14.14'
C9	87°50'21"	10.50'	16.10'	S 53°26'51" W	14.57'
C10	92°29'36"	10.50'	16.95'	S 36°23'10" E	15.17'
C11	4°43'09"	230.00'	18.94'	S 7°30'03" W	18.94'
C12	6°00'52"	230.00'	24.14'	S 2°08'02" W	24.13'
C13	90°00'00"	10.50'	16.49'	S 44°07'36" W	14.85'
C14	2°59'20"	267.00'	13.93'	N 89°22'44" W	13.93'
C15	90°00'00"	10.50'	16.49'	N 45°52'24" W	14.85'
C16	79°35'55"	10.50'	14.59'	S 49°19'38" W	13.44'
C17	92°09'39"	10.50'	16.89'	S 36°33'09" E	15.13'
C18	87°30'24"	10.50'	16.04'	N 53°36'50" E	14.52'
C19	10°44'02"	170.00'	31.85'	N 4°29'37" E	31.80'

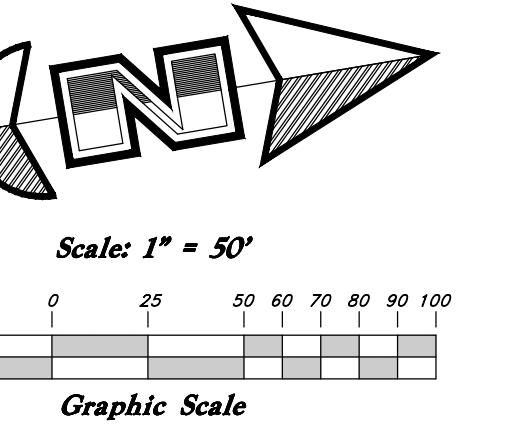

Scale: 1" = 50'
Graphic Scale

Legend

- Monument to be set
- Found Centerline Monument
- (Rad.) Radial Line
- (N/R) Non-Radial Line
- PUE Public Utility Easement
- PU&DE Public Utility & Drainage Easement
- x-x-x- Fence
- Buildable Area
- Floodplain
- Easement
- Buildable area
- Bank of Slough
- Existing Boundary
- Set Hub & Tack
- ▲ A Nail will be set in Curb
- ◎ Extension of Property
- Set 5/8"x 24" Long Rebar & Cap w/ Lathe
- ◆ Section Corner

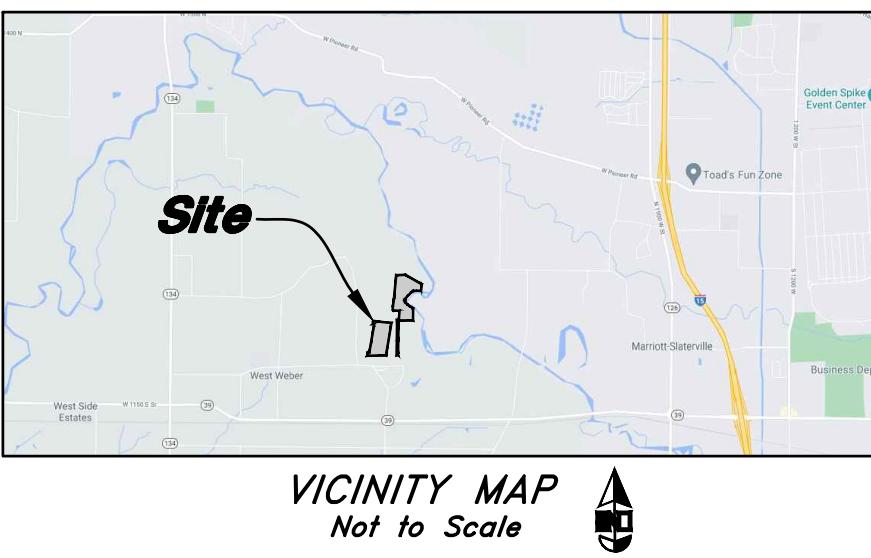

VICINITY MAP
Not to Scale



Riverbend Farm Phase 2

A part of the Southeast Quarter of Section 16 and the West Half of Section 15,


T6N, R2W, SLB&M, U.S. Survey, Weber County, Utah

February 2024

* See All Sheets*


- NOTES**
- All construction shall conform to Weber County standards and specifications.
 - Culinary water services will be 1" Dia. Poly Pipe (200 P.S.I. CTS Poly Pipe AWWA Standard C901) to be centered on the frontage and extended 10' beyond the right of way line.
 - 4" Sanitary sewer laterals to be constructed 10' down slope from the center of the lot and extended 10' beyond the right of way line.
 - 4" Land drain laterals to be constructed at the low corner of the lot and extended 10' beyond the right of way line.
 - Sewer Curb Existing Asphalt to provide a smooth clean edge.
 - All Utility trenches within the Street right of way shall have a City approved imported granular backfill.
 - Thrust block all water line fittings.
 - All inlet grates shall be bicycle safe.
 - All fire hydrants and access roads shall be installed prior to any construction of any buildings.
 - All fire hydrants shall be placed with 4 1/2 inch connections facing the point of access for the Fire Department Apparatus.
 - Prior to the beginning of construction of any buildings, a fire flow test of new hydrants shall be conducted to verify the actual fire flow for this project. The Fire Prevention Division shall witness this test and shall be notified of minimum of 10 hydrants required.
 - curb & gutter installed along 3600 West Street will be set to ensure 1.5% minimum/3.0% Maximum cross slope from edge of asphalt. Contractor to verify prior to construction of curb.
 - An excavation permit is required for all work done within the existing right of way.
 - A Storm Water Construction Activity Permit is required for any construction that disturbs more than 5000 Sq. Ft or 200 Cubic Yards.
 - All improvements need to be either installed or escrowed prior to recording of the subdivision.
 - If construction activity will disturb more than an acre then a State SWPPP will be required. This includes the construction of the homes etc. on each lot.

delete if not part of actual plans

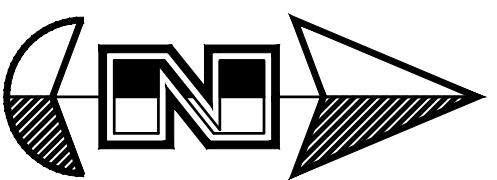

- NOT TO SCALE -

not applicable to this phase

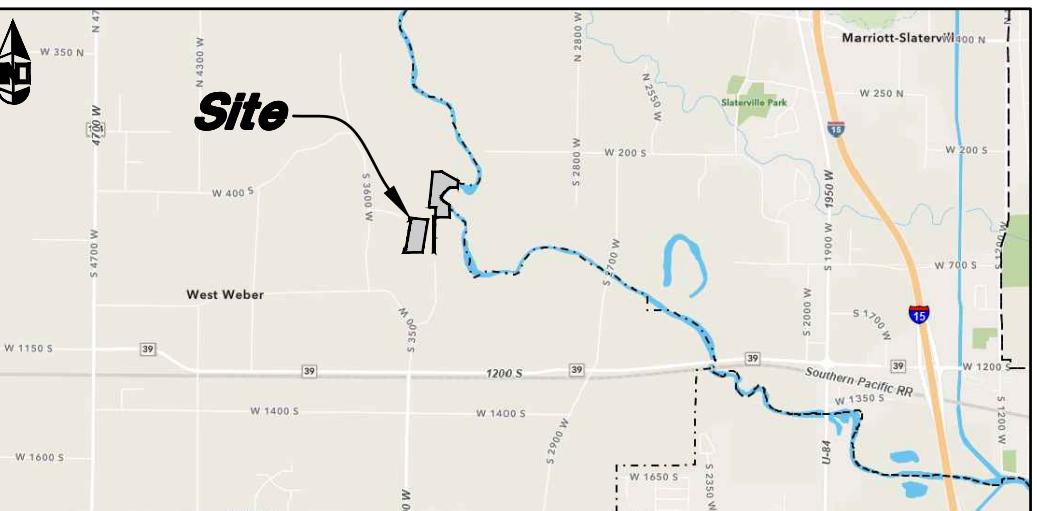

VICINITY MAP
(Not to Scale)

Legend

(Note: All items may not appear on drawing.)

San. Sewer Manhole	○
Water Manhole	○
Storm Drain Manhole	○
Cleanout	○
Electrical Manhole	○
Catch Basin	○
Exist. Fire Hydrant	○
Fire Hydrant	○
Exist. Water Valve	○
Water Valve	○
Sanitary Sewer	○
Storm Water	○
Gas Line	○
Irrigation Line	○
Storm Drain	○
Drain Line	○
Secondary Waterline	○
Power Line	○
Fire Line	○
Drain	○
Power pole	○
Power pole w/guy	○
Light pole	○
Flowline of ditch	○
Overhead Power line	○
Drainage Material Pipe	○
Concrete Pipe	○
Reinforced Concrete Pipe	○
Ductile Iron Pipe	○
PVC Chloride	○
Top of Asphalt	○
Edge of Asphalt	○
Centerline	○
FF	○
Finish Floor	○
Top of Curb	○
Top of Wall	○
Top of Walk	○
Top of Concrete	○
Natural Ground	○
Gravel Grade	○
Match Existing	○
Fire Department Connection	○
Finish Contour	○
Grade Contour	○
Finish Grade	○
Existing Grade	○
Ridge Line	○
Direction of Flow	○
Existing Asphalt	▨
New Asphalt	▨
Existing Concrete	▨
New Concrete	▨

GENERAL UTILITY NOTES:

- Coordinate all utility connections to building with plumbing plans and building contractor.
- Verify depth and location of all existing utilities prior to constructing any new utility lines. Notify Civil Engineer of any discrepancies or conflicts prior to any connections being made.
- All catch basin and inlet box grates are to be bicycle proof.
- All inlet boxes located in curb and gutter are to be placed parallel to the curb and gutter and set under the frame and grate. Improperly placed boxes will be removed and replaced at no additional cost to the owner. Precast or cast in place boxes are acceptable.
- Refer to the site electrical plan for details and locations of electrical lines, transformers and light poles.
- Gas lines, telephone lines, and cable TV lines are not a part of these plans unless otherwise stated.
- Water meters are to be installed per city standards and specifications. It will be the contractor's responsibility to obtain all items required.
- Water mains, valves, fire hydrants, fittings etc. are to be constructed as shown. Contractor is responsible to construct any vertical adjustments necessary to clear sewer, storm drain or other utilities as necessary including valve boxes and hydrant spools to proper grade.
- Field verify all existing and/or proposed Roof Drain/Roof Drain down spout connections to Storm Water System with Civil, Plumbing & Architectural plans.
- All gravity flow utility lines shall be installed prior to any pressurized utilities unless written permission is obtained from the engineer of record before construction begins.

UTILITY PIPING MATERIALS:
All piping to be installed per manufacturers recommendations. Refer to project specifications for more detailed information regarding materials, installation, etc.

CULINARY SERVICE LATERALS

- 3/4" to 1" diameter pipe - 200 PSI CTS Poly (AWWA Standard C901)
- Over 2" diameter pipe - AWWA C-900 Class 150 pipe (DR18)

WATER MAIN LINES AND FIRE LINES

- Pipe material as shown on utility plan view or to meet city standards.

SANITARY SEWER LINES

- All sewer piping to be Polyvinyl Chloride (PVC) sewer pipe, ASTM D 3034, Type PSM, SDR 35

STORM DRAIN LINES

- 10" pipes or smaller - Polyvinyl Chloride (PVC) sewer pipe, ASTM D3034, Type PSM, SDR 35
- 12" to 21" pipes - Concrete Pipe, ASTM C14, Class III up to 13' of cover. For greater than 13' feet of cover, use reinforced concrete pipe and classes listed below.
- 24" pipes or larger - Reinforced Concrete Pipe, ASTM C76, Class IV up to 13' of cover, Class V for 13' to 21' of cover, Class VI for 21' to 32' of cover, and Special Design for cover greater than 32 feet.



Sheet List:

- C0 - Cover
- C1 - Grading
- C2 - Utility
- C3 - 725 South Street
- C4 - 700 South Street
- C5 - 3450 West Street
- C6 - 3400 West Street
- C7 - Details
- C8 - Details

CAUTION NOTICE TO CONTRACTOR
The contractor is specifically cautioned that the location and/or elevation of existing utilities as shown on these plans are based on records of the various utility companies and, where possible, measurements taken in the field. The information is not to be relied upon as being exact or complete. The contractor is to call the appropriate utility company at least 48 hours before any excavation to request exact field location of utilities. It shall be the responsibility of the contractor to relocate all existing utilities which conflict with the proposed improvements shown on the plans.

PRIVATE ENGINEER'S NOTICE TO CONTRACTORS
The Contractor agrees that he shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety aspects of the project. The contractor shall be liable for damages resulting from his acts or omissions and shall be limited to normal working hours; and that the contractor shall defend, indemnify, and hold the owner and the engineer harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting for liability arising from the sole negligence of the owner or the engineer.

Call before you Dig
Avoid cutting underground utility lines. It's costly.



1-800-662-4111

GREAT BASIN ENGINEERING



Riverbend Farm Phase 2
A part of the Southeast Quarter of Section 16 and the West Half of Section 15, T6N, R2W, SLB&M, U.S. Survey, Weber County, Utah


February 2024

SHEET NO.


CO

21N724 - BP

NOT FOR CONSTRUCTION

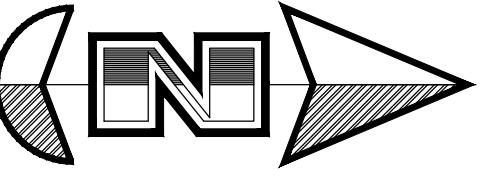

Scale: 1" = 60'

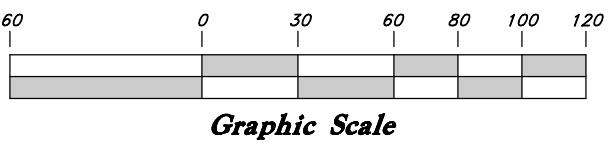

Graphic Scale

Is this an irrigation ditch what's happening to it?

Properties shown include:

- 700 South Street: Properties 226, 225, 224, 223, 222, 221, 220, 219, 218, 217, 216, 215, 214, 213, 212, 211.
- 3450 West Street: Properties 231, 230, 229, 228, 227, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247.
- 725 South Street: Properties 201, 202, 203, 204, 205, 206, 207, 208, 209, 210.
- Riverbend Farms Phase 1: Properties 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132.

Address labels: 700 South Street, 3450 West Street, 725 South Street, Riverbend Farms Phase 1.

Property numbers: 231, 230, 229, 228, 227, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132.

Coordinates: Various coordinates are listed along the property boundaries, such as 4236.72FG, 4236.66FG, 4236.87FG, etc.

CURB AND GUTTER CONSTRUCTION NOTES:

1. It is the responsibility of the surveyor to adjust top of curb grades at the time construction staking.
2. Refer to the typical details for a standard and open face curb and gutter for dimensions.
3. Transitions between open face and standard curb and gutter are to be smooth. Hand form these areas if necessary.

ADA NOTES:
Contractor must maintain a running slope on Accessible routes no steeper than 5.0% (1:20). The cross slope for Accessible routes must be no steeper than 2.0% (1:50). All Accessible routes must have a minimum clear width of 36". If grades on plans do not meet this requirement notify Consultants immediately.

The Client, Contractor, and Subcontractor should immediately notify the Consultant of any conditions of the project that they believe do not comply with the current state of the ADA

and/or FHAA.

PRIVATE ENGINEER'S NOTICE TO CONTRACTORS

The Contractor agrees that he shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal working hours; and that the contractor shall defend, indemnify, and hold the owner and the engineer harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting for liability arising from the sole negligence of the owner or the engineer.

ALL CONSTRUCTION TO CONFORM TO CITY STANDARDS AND SPECIFICATIONS IN RIGHT OF WAY

— County and/or District

NOT FOR CONSTRUCTION

GREAT BASIN ENGINEERING




Grading Plan

*Part of the Southeast Quarter of Section 16 and the West Half
of Section 15, T6N, R2W, SLB&M, Weber County, Utah*


February 2024

• 637

c1

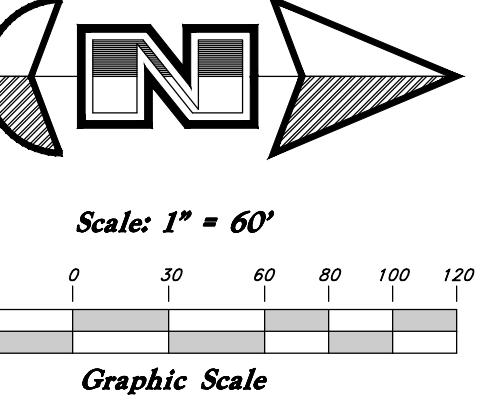

GREAT BASIN ENGINEERING

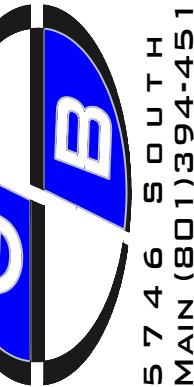

Riverbend Farm Phase 2

A part of the Southeast Quarter of Section 16 and the West Half of Section 15, T6N, R2W, SLBM, Weber County, Utah

MAIN (80) 521-0222, FAX (60) 521-0222, G.R.E.A.T. BASIN ENGINEERING, INC.

Utility Plan



GENERAL GRADING NOTES:

- All work shall be in accordance with the City Public Works Standard.
- The slopes shall be no steeper than 2 horizontal to 1 vertical.
- Fill material shall be steeper than 2 horizontal to 1 vertical.
- Fills shall be compacted per the recommendations of the geotechnical report prepared for the project and shall be certified by the geotechnical engineer.
- Areas to receive fill shall be properly prepared and approved by the City inspector and geotechnical Engineer prior to placing fill.
- Fills shall be bencheted into competent material as per specifications and geotechnical report.
- All trench backfill shall be tested and certified by the site geotechnical engineer per the grading code.
- A geotechnical engineer shall perform periodic inspections and submit a complete report upon completion of the rough grading.
- The final completion report and certification from the geotechnical engineer shall contain the type of field testing performed. Each test shall be identified with the method of obtaining the in-place density, whether sonic cone or drive ring and shall be so noted for each test. Sufficient maximum density determinations shall be performed to verify the accuracy of the design earth curves used by the field technician.
- Dust shall be controlled by watering.
- The location and protection of all utilities is the responsibility of the permittee.
- Approved protective measures and temporary drainage provisions must be used to protect adjoining properties during the grading project.
- All public roadways must be cleared daily of all dirt, mud and debris deposited on them as a result of the grading operation. Cleaning is to be done to the satisfaction of the city engineer.
- The site shall be cleared and grubbed of all vegetation and deleterious matter prior to grading.
- The contractor shall provide shoring in accordance with OSHA requirements for trench walls.
- Aggregate base shall be compacted per the geotechnical report prepared for the project.
- Elevations shown on this plan are Finish grades. Rough grades are the subgrades of the improvements shown herein.
- The recommendations in the following Geotechnical Engineering Report by Gordon, Clegg, and Engineering, Inc. are included in the requirements of grading and site preparation.
- The report is titled "GEOTECHNICAL STUDY, PROPOSED WHEATRIDGE TOWNHOMES" Job No.: 877-001-20 Address: Approximately 3125 North 1700 East Layton, UT Dated: October 28, 2020
- As part of the construction documents, owner has provided contractor with a topographic survey performed by aerial or aerial means. Such survey was prepared for project design purposes and is provided to the contractor as a courtesy. It is expressly understood that such survey may not accurately reflect existing topographic conditions.
- Erosion Control: Protect all inlet boxes, catch basins, etc. with straw bales or other approved method to strain the storm water during construction. Protect surrounding properties and streets from site runoff with sandbags and earth berms.

CURB AND GUTTER CONSTRUCTION NOTES:

- It is the responsibility of the surveyor to adjust top of curb grades at the time of construction staking.
- Refer to the typical details for a standard and open face curb and gutter for dimension.
- Transitions between open face and standard curb and gutter are to be smooth. Hand form these areas if necessary.

ADA NOTES:

Contractor must maintain a running slope on Accessible routes no steeper than 5.0% (1:20). The cross slope for Accessible routes must be no steeper than 2.0% (1:50). All Accessible routes must have a minimum clear width of 36". If grades on plans do not meet this requirement notify Consultants immediately.

The Client, Contractor, and Subcontractor should immediately notify the Consultant of any conditions of the project that they believe do not comply with the current state of the ADA and/or FHAA.

PRIVATE ENGINEER'S NOTICE TO CONTRACTORS
The Contractor agrees that he shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal working hours; and that the contractor shall defend, indemnify, and hold the owner and engineer harmless from any and all liability, real or alleged, in connection with the performance of work on this project, excepting for liability arising from the sole negligence of the owner or the engineer.

ALL CONSTRUCTION TO CONFORM TO CITY STANDARDS AND SPECIFICATIONS IN RIGHT OF WAY


NOT FOR CONSTRUCTION

February 2024

SHEET NO.



C2

21N724 - BP

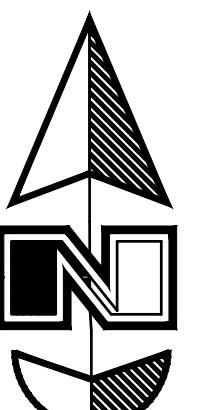

Horz. Scale: 1"=40'

Vert. Scale: 1"=4'

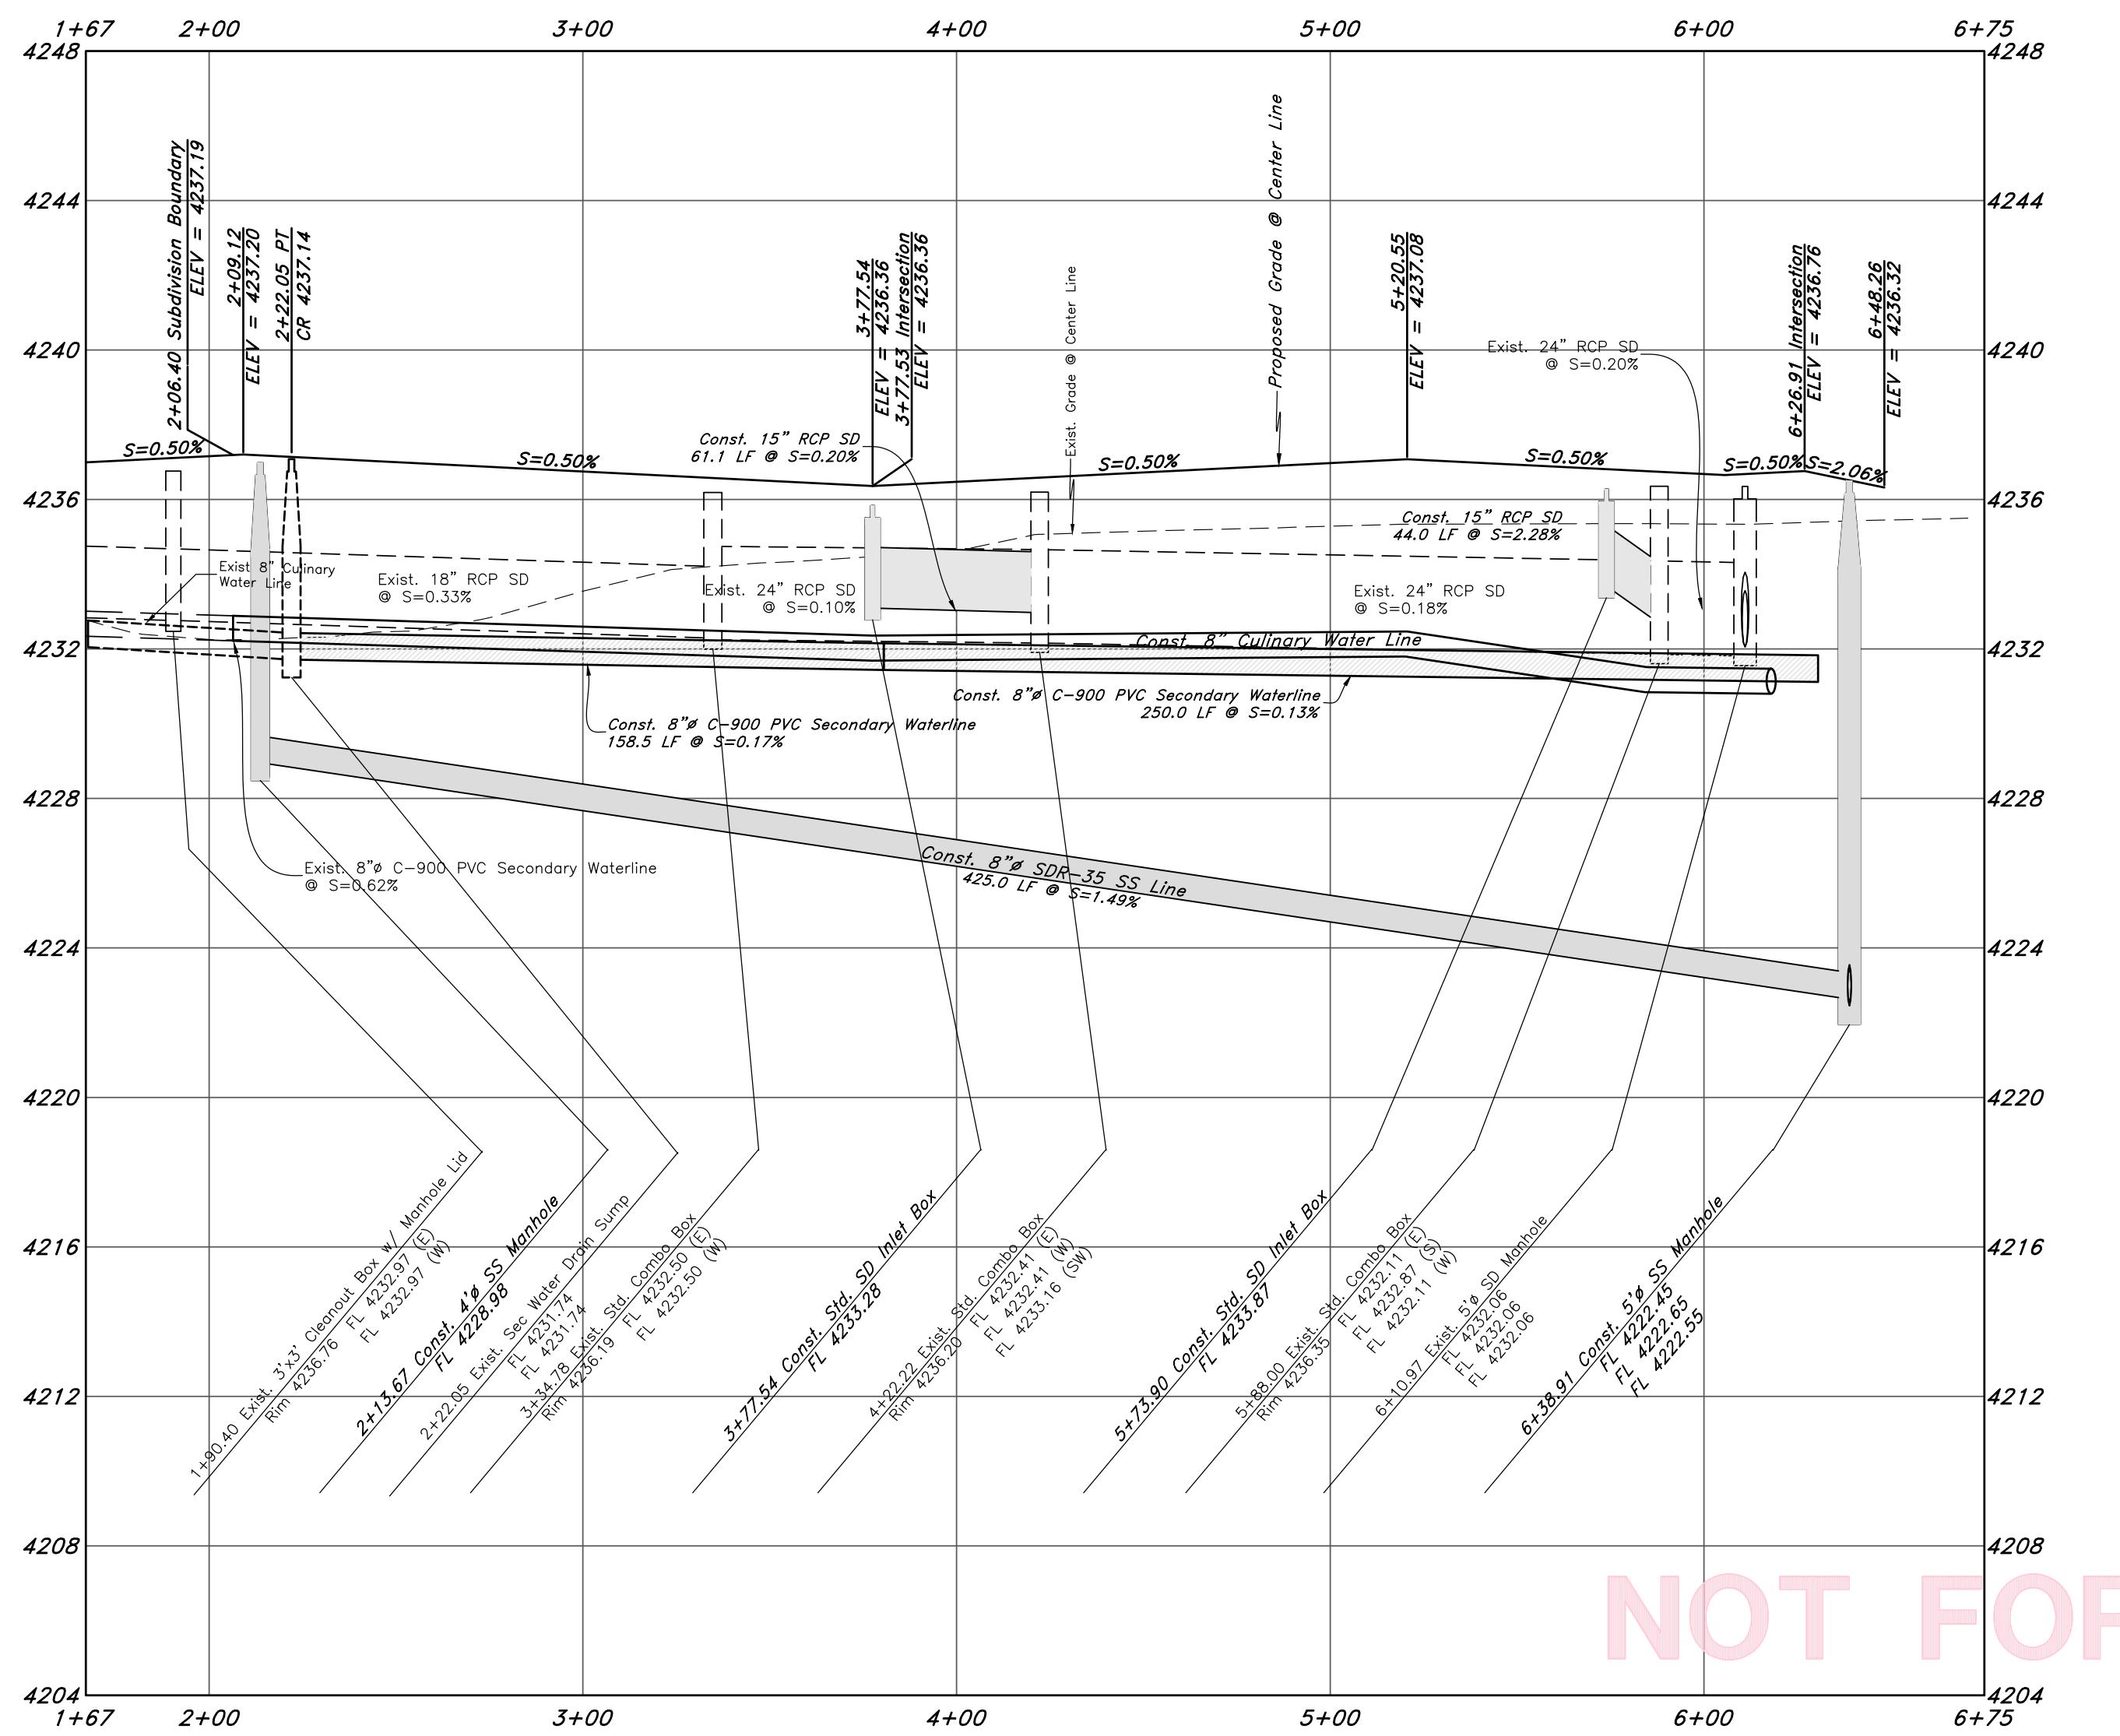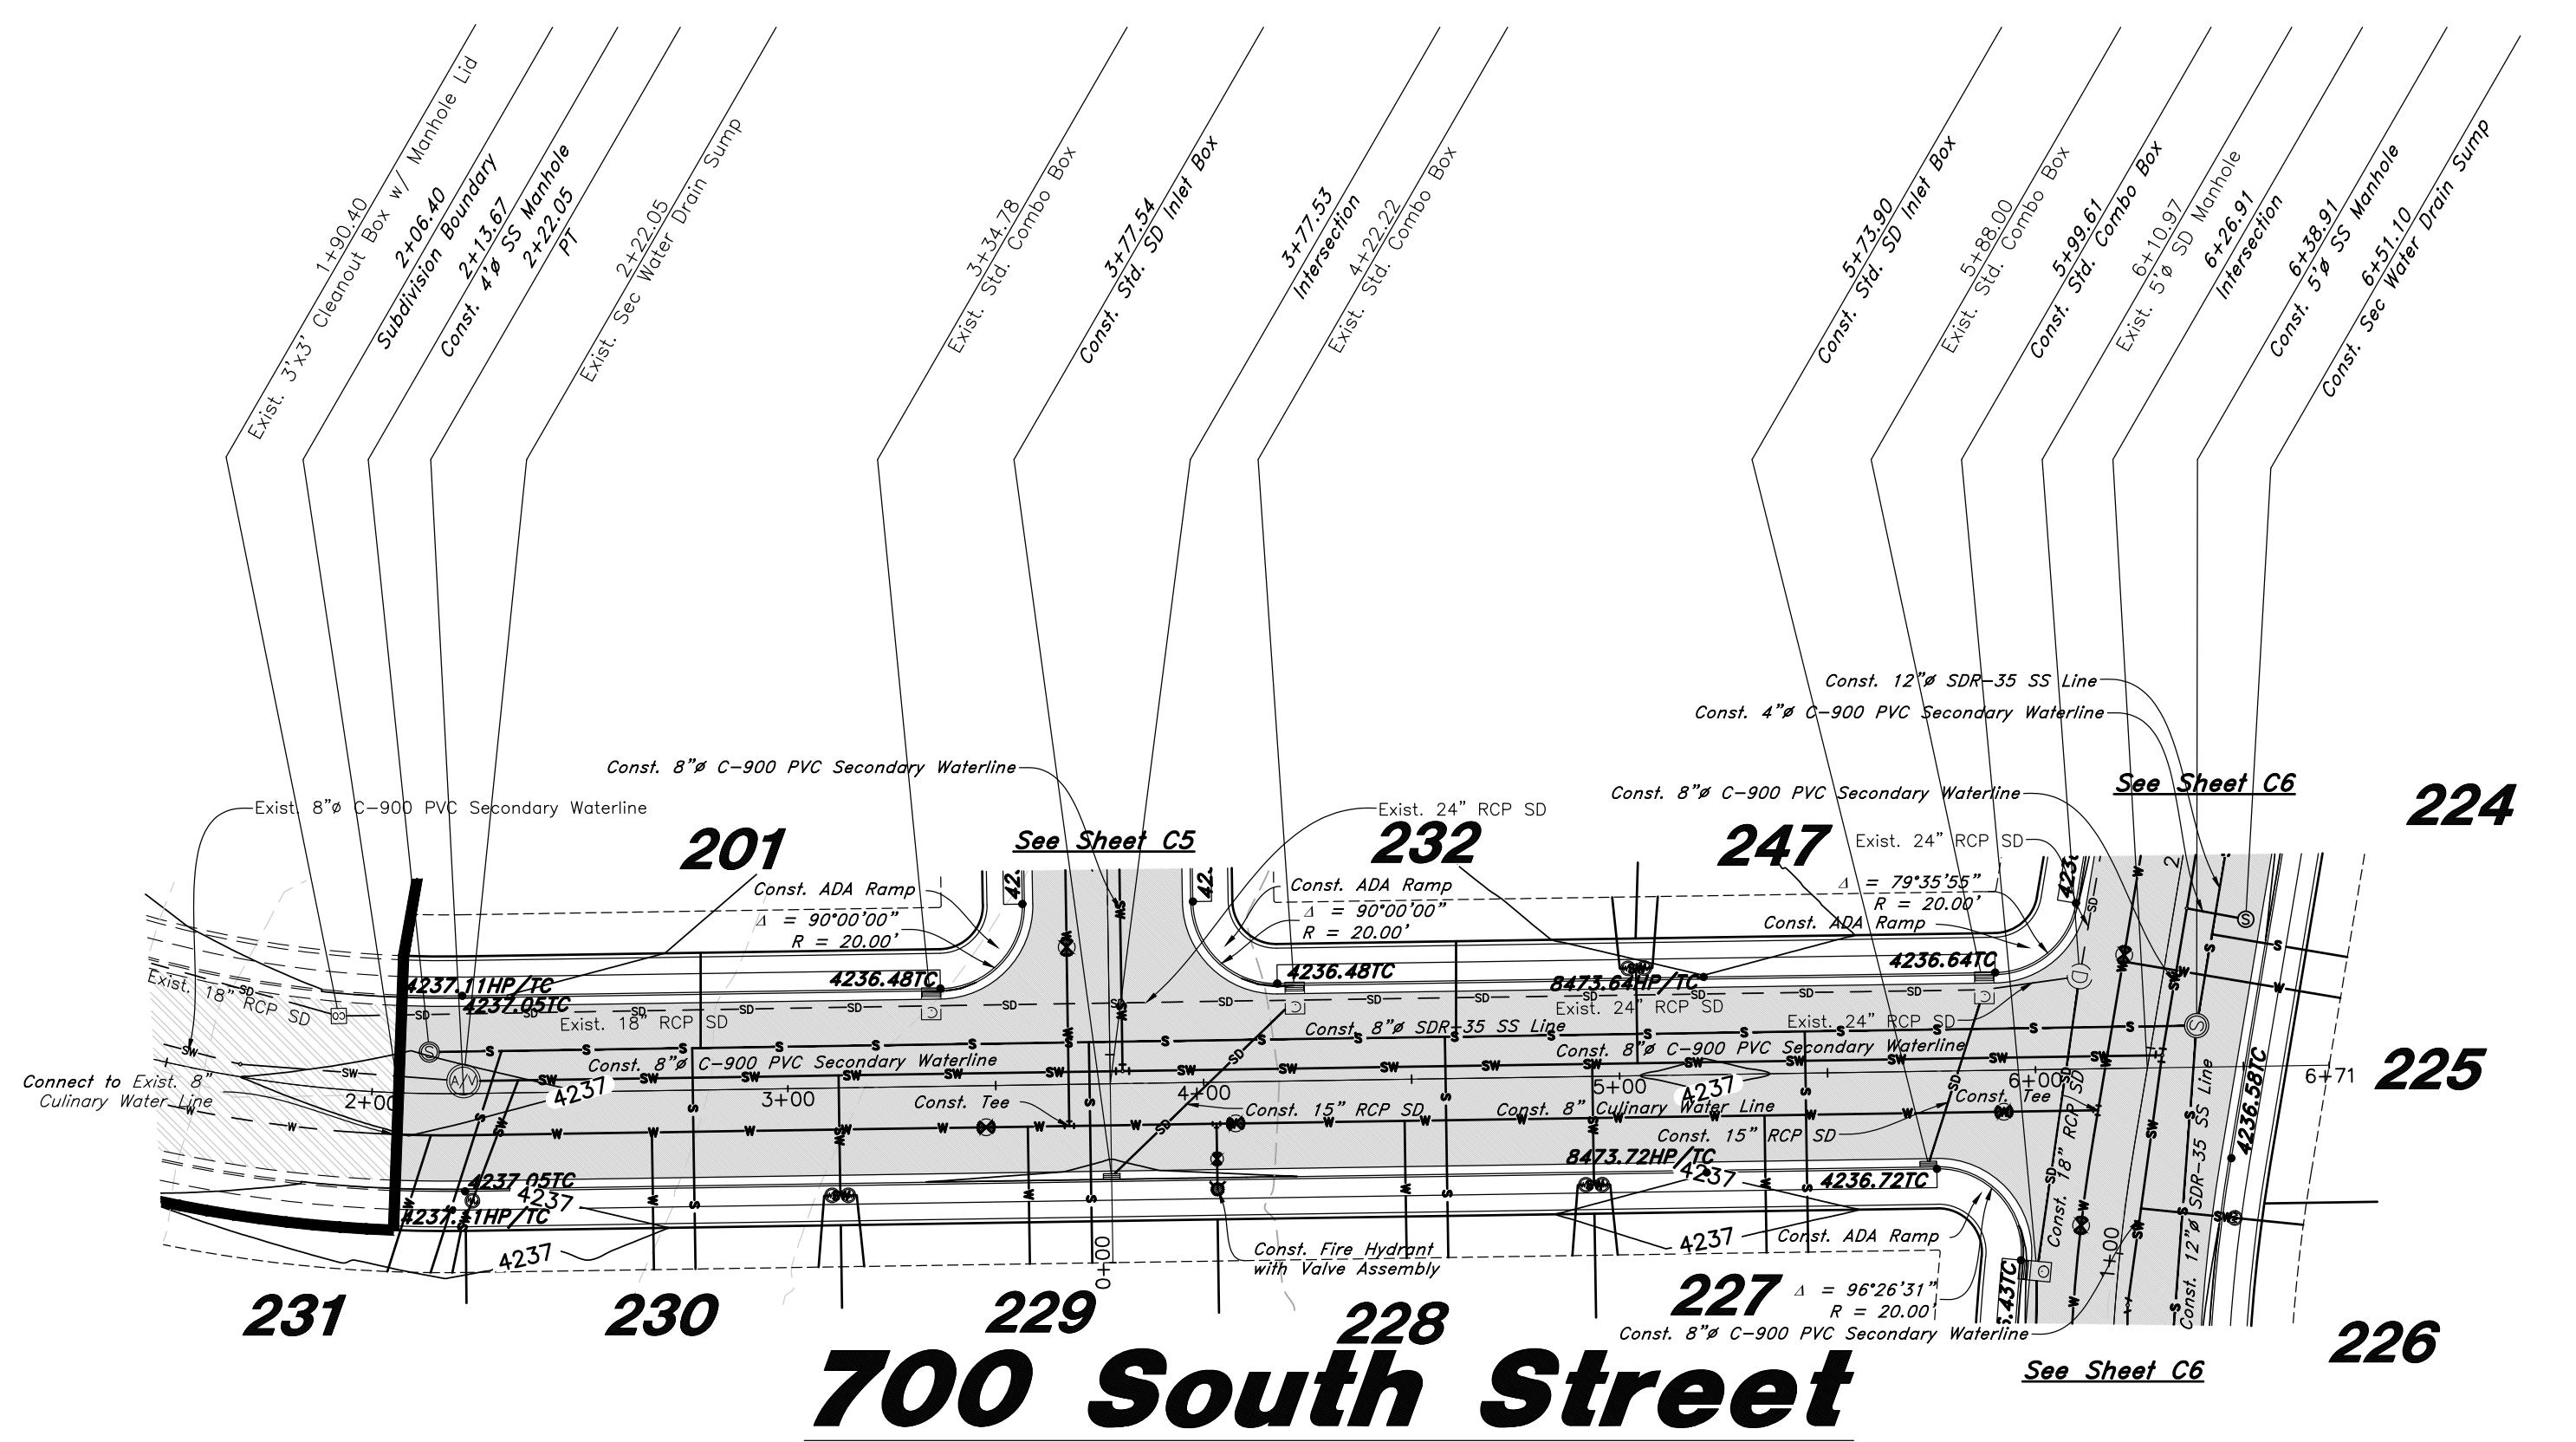

NOT FOR CONSTRUCTION

Legend

All Items may not appear on drawing)

GREAT BASIN
GENEVE

700 South Street

700 South Street

February 2024

HEET NO.

C4

21N724 - BP

A part of the Southeast Quarter of Section 16 and the West Half of
Section 15, T6N, R2W, SLB&M, Weber County, Utah

2024

4


- BP

Feb


SHEET 1

1



ENR/ENR-B

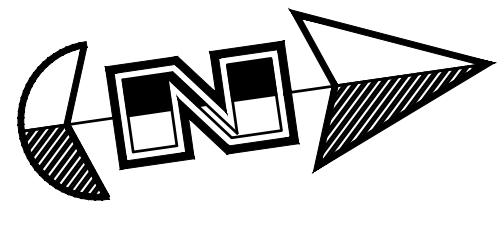

Horz. Scale: 1"=40'
Vert. Scale: 1"=4'
Graphic Scale

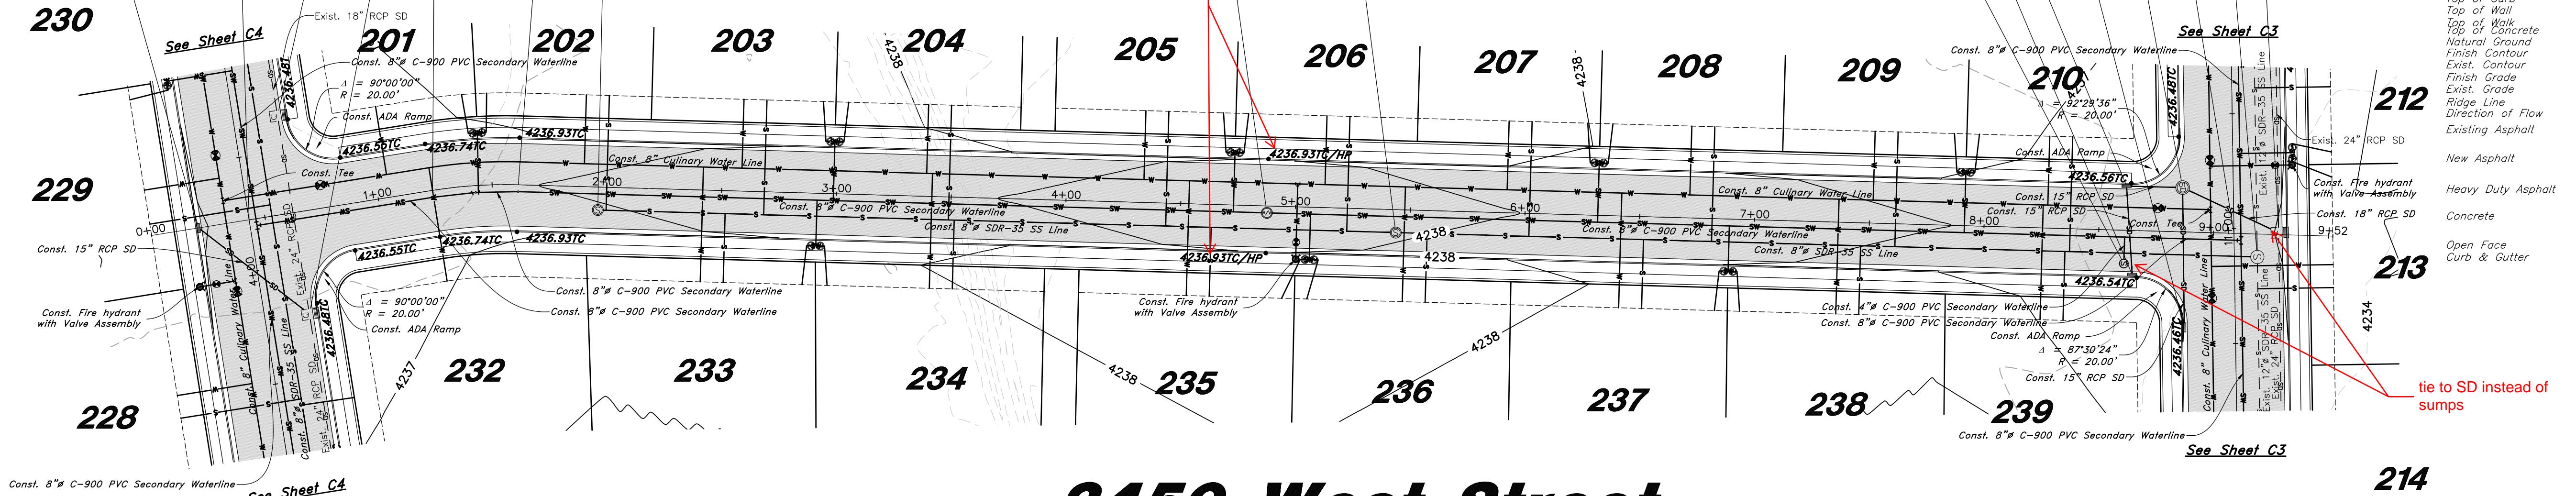

3450 West Street

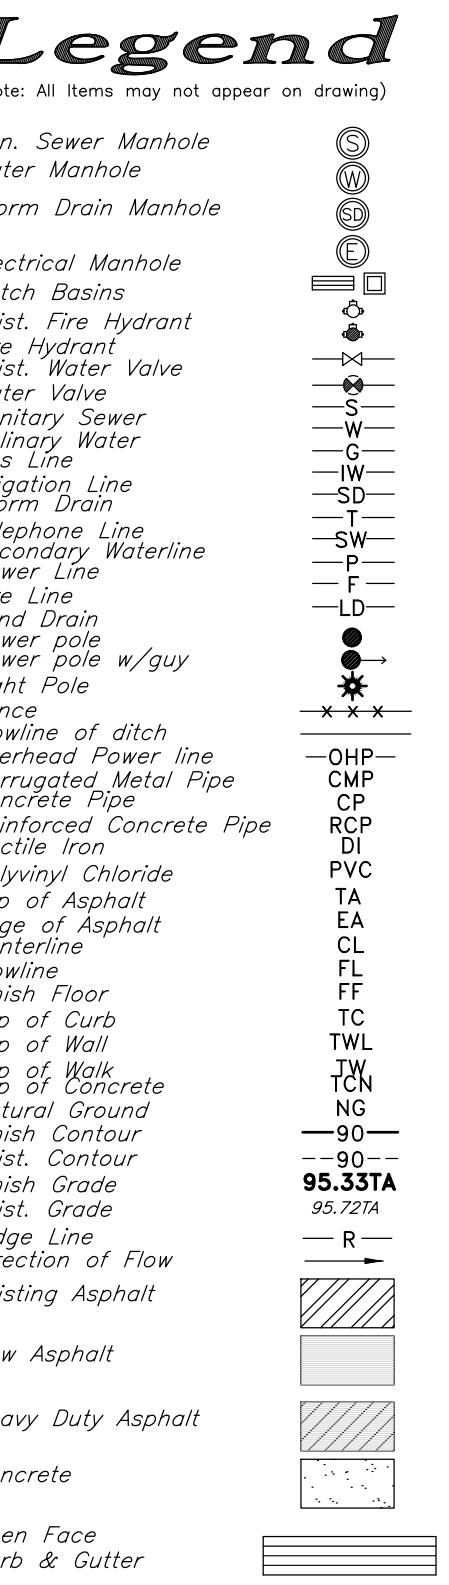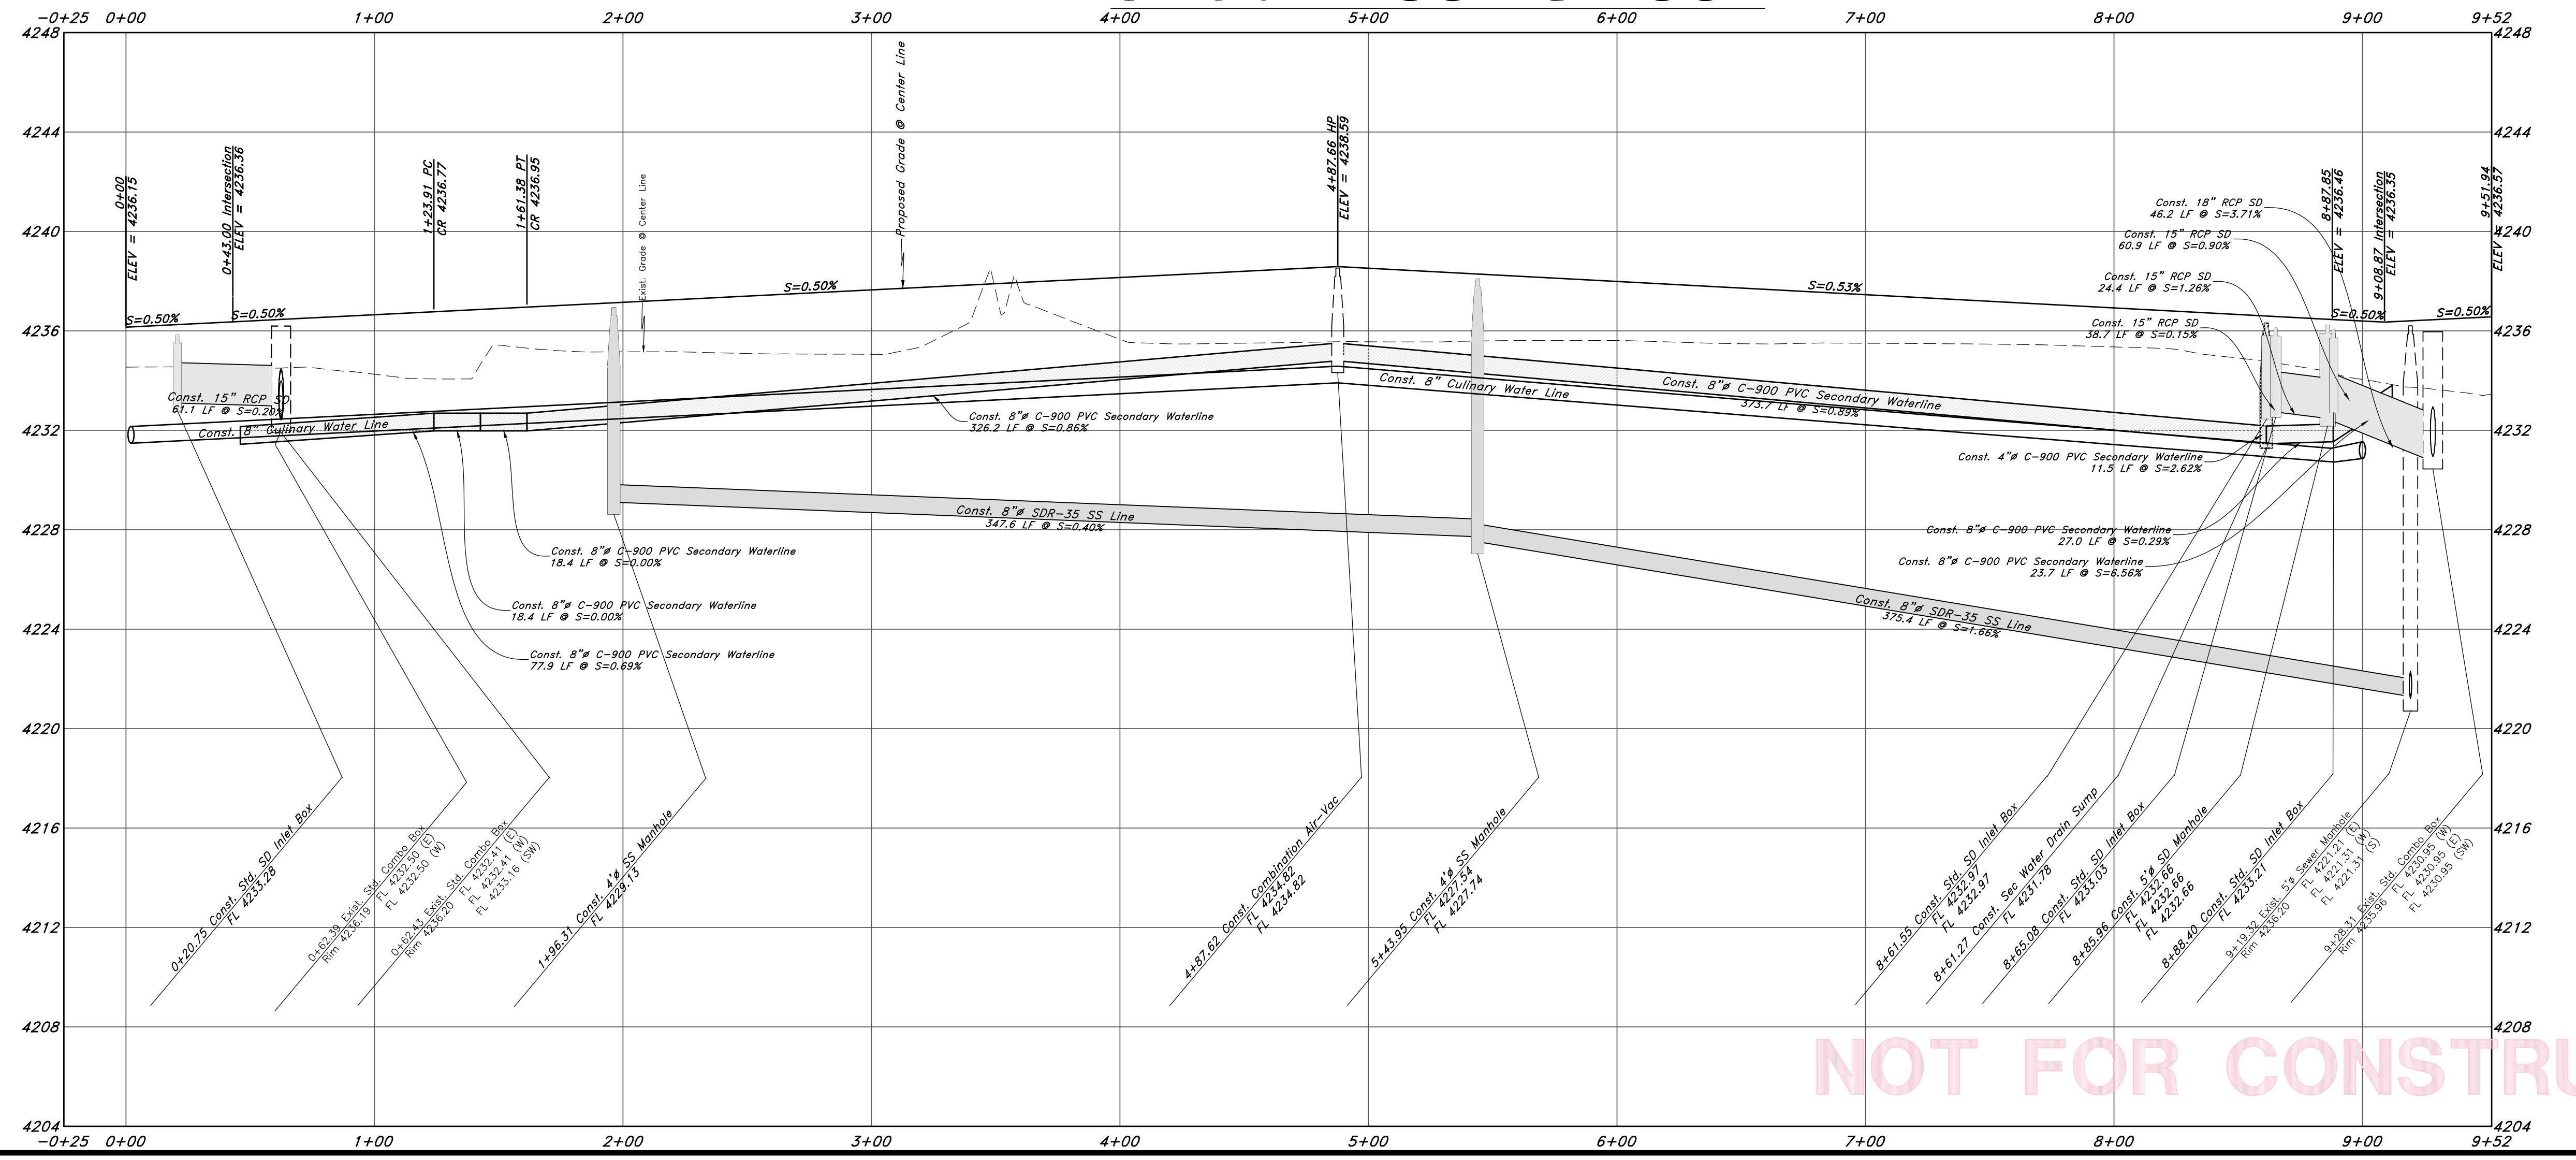


GREAT BASIN ENGINEERING




Riverbend Farm Phase 2

A part of the Southeast Quarter of Section 16 and the West Half of
Section 15, T6N, R2W, SLC (80)152-0222 FAX (80)392-7544

W.W. GREAT BASIN ENGINEERING CO. M

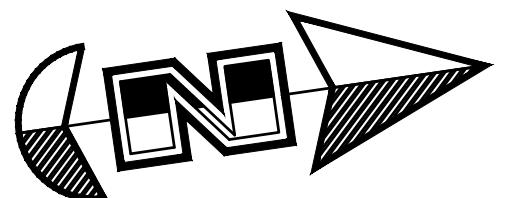

Horz. Scale: 1"=40'
Vert. Scale: 1"=4'

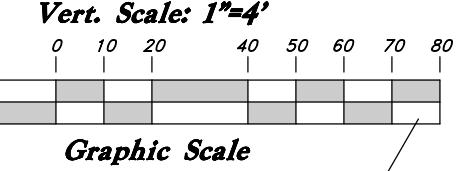

0.14-39 Subdivision Boundary

0.14-41 Concr. Sidewalk Box

0.19-59 Concr. Sidewalk Box

0.19-59 Manhole

0.14-40 Manhole Box

0.14-46 Concr. Sidewalk Box

0.14-47 Concr. Sidewalk Box

0.14-48 Concr. Sidewalk Box

0.14-49 Manhole

0.14-50 Manhole Box

0.14-51 Manhole

0.14-52 Manhole

0.14-53 Manhole

0.14-54 Manhole

0.14-55 Manhole

0.14-56 Manhole

0.14-57 Manhole

0.14-58 Manhole

0.14-59 Manhole

0.14-60 Manhole

0.14-61 Manhole

0.14-62 Manhole

0.14-63 Manhole

0.14-64 Manhole

0.14-65 Manhole

0.14-66 Manhole

0.14-67 Manhole

0.14-68 Manhole

0.14-69 Manhole

0.14-70 Manhole

0.14-71 Manhole

0.14-72 Manhole

0.14-73 Manhole

0.14-74 Manhole

0.14-75 Manhole

0.14-76 Manhole

0.14-77 Manhole

0.14-78 Manhole

0.14-79 Manhole

0.14-80 Manhole

0.14-81 Manhole

0.14-82 Manhole

0.14-83 Manhole

0.14-84 Manhole

0.14-85 Manhole

0.14-86 Manhole

0.14-87 Manhole

0.14-88 Manhole

0.14-89 Manhole

0.14-90 Manhole

0.14-91 Manhole

0.14-92 Manhole

0.14-93 Manhole

0.14-94 Manhole

0.14-95 Manhole

0.14-96 Manhole

0.14-97 Manhole

0.14-98 Manhole

0.14-99 Manhole

0.14-100 Manhole

0.14-101 Manhole

0.14-102 Manhole

0.14-103 Manhole

0.14-104 Manhole

0.14-105 Manhole

0.14-106 Manhole

0.14-107 Manhole

0.14-108 Manhole

0.14-109 Manhole

0.14-110 Manhole

0.14-111 Manhole

0.14-112 Manhole

0.14-113 Manhole

0.14-114 Manhole

0.14-115 Manhole

0.14-116 Manhole

0.14-117 Manhole

0.14-118 Manhole

0.14-119 Manhole

0.14-120 Manhole

0.14-121 Manhole

0.14-122 Manhole

0.14-123 Manhole

0.14-124 Manhole

0.14-125 Manhole

0.14-126 Manhole

0.14-127 Manhole

0.14-128 Manhole

0.14-129 Manhole

0.14-130 Manhole

0.14-131 Manhole

0.14-132 Manhole

0.14-133 Manhole

0.14-134 Manhole

0.14-135 Manhole

0.14-136 Manhole

0.14-137 Manhole

0.14-138 Manhole

0.14-139 Manhole

0.14-140 Manhole

0.14-141 Manhole

0.14-142 Manhole

0.14-143 Manhole

0.14-144 Manhole

0.14-145 Manhole

0.14-146 Manhole

0.14-147 Manhole

0.14-148 Manhole

0.14-149 Manhole

0.14-150 Manhole

0.14-151 Manhole

0.14-152 Manhole

0.14-153 Manhole

0.14-154 Manhole

0.14-155 Manhole

0.14-156 Manhole

0.14-157 Manhole

0.14-158 Manhole

0.14-159 Manhole

0.14-160 Manhole

0.14-161 Manhole

0.14-162 Manhole

0.14-163 Manhole

0.14-164 Manhole

0.14-165 Manhole

0.14-166 Manhole

0.14-167 Manhole

0.14-168 Manhole

0.14-169 Manhole

0.14-170 Manhole

0.14-171 Manhole

0.14-172 Manhole

0.14-173 Manhole

0.14-174 Manhole

0.14-175 Manhole

0.14-176 Manhole

0.14-177 Manhole

0.14-178 Manhole

0.14-179 Manhole

0.14-180 Manhole

0.14-181 Manhole

0.14-182 Manhole

0.14-183 Manhole

0.14-184 Manhole

0.14-185 Manhole

0.14-186 Manhole

0.14-187 Manhole

0.14-188 Manhole

0.14-189 Manhole

0.14-190 Manhole

0.14-191 Manhole

0.14-192 Manhole

0.14-193 Manhole

0.14-194 Manhole

0.14-195 Manhole

0.14-196 Manhole

0.14-197 Manhole

0.14-198 Manhole

0.14-199 Manhole

0.14-200 Manhole

0.14-201 Manhole

0.14-202 Manhole

0.14-203 Manhole

0.14-204 Manhole

0.14-205 Manhole

0.14-206 Manhole

0.14-207 Manhole

0.14-208 Manhole

0.14-209 Manhole




0.14-210 Manhole

0.14-211 Manhole





0.14-212 Manhole

0.14-213 Manhole

0.14-214

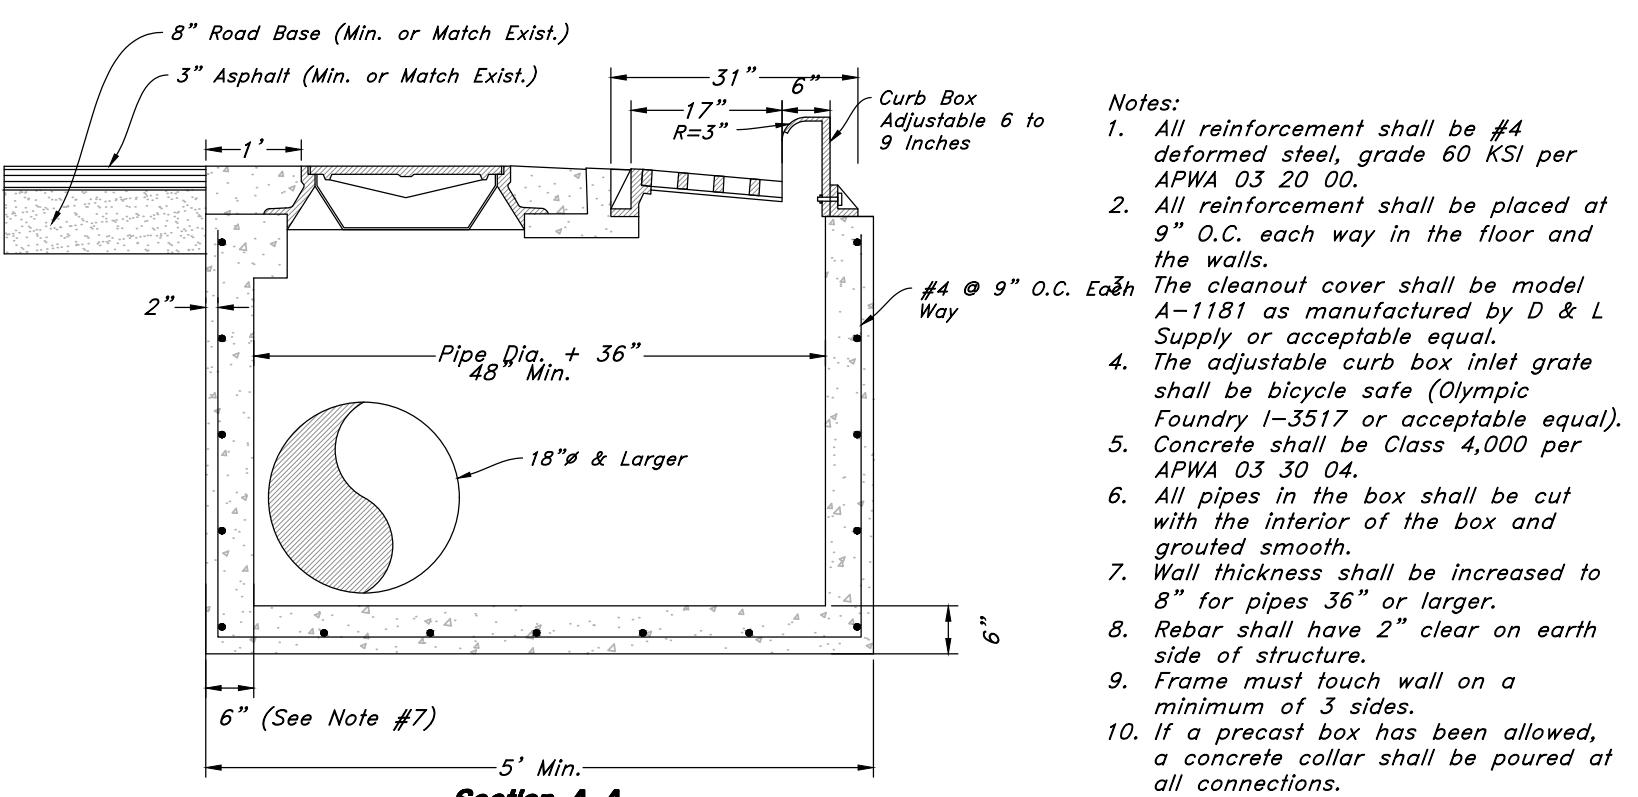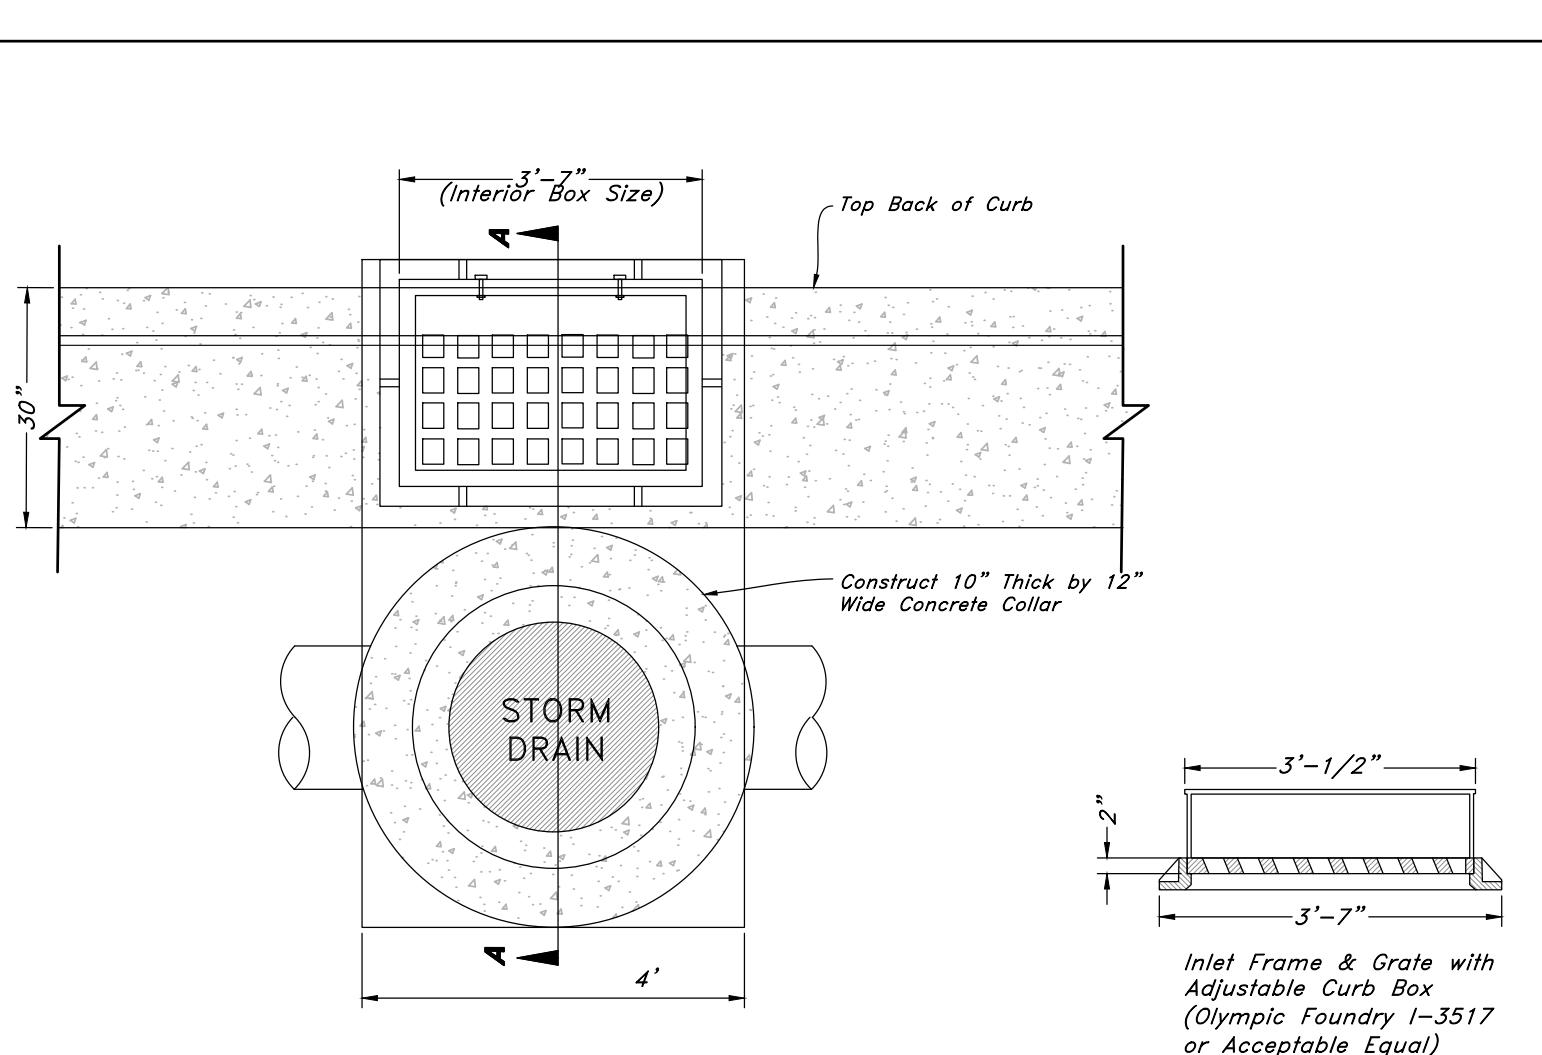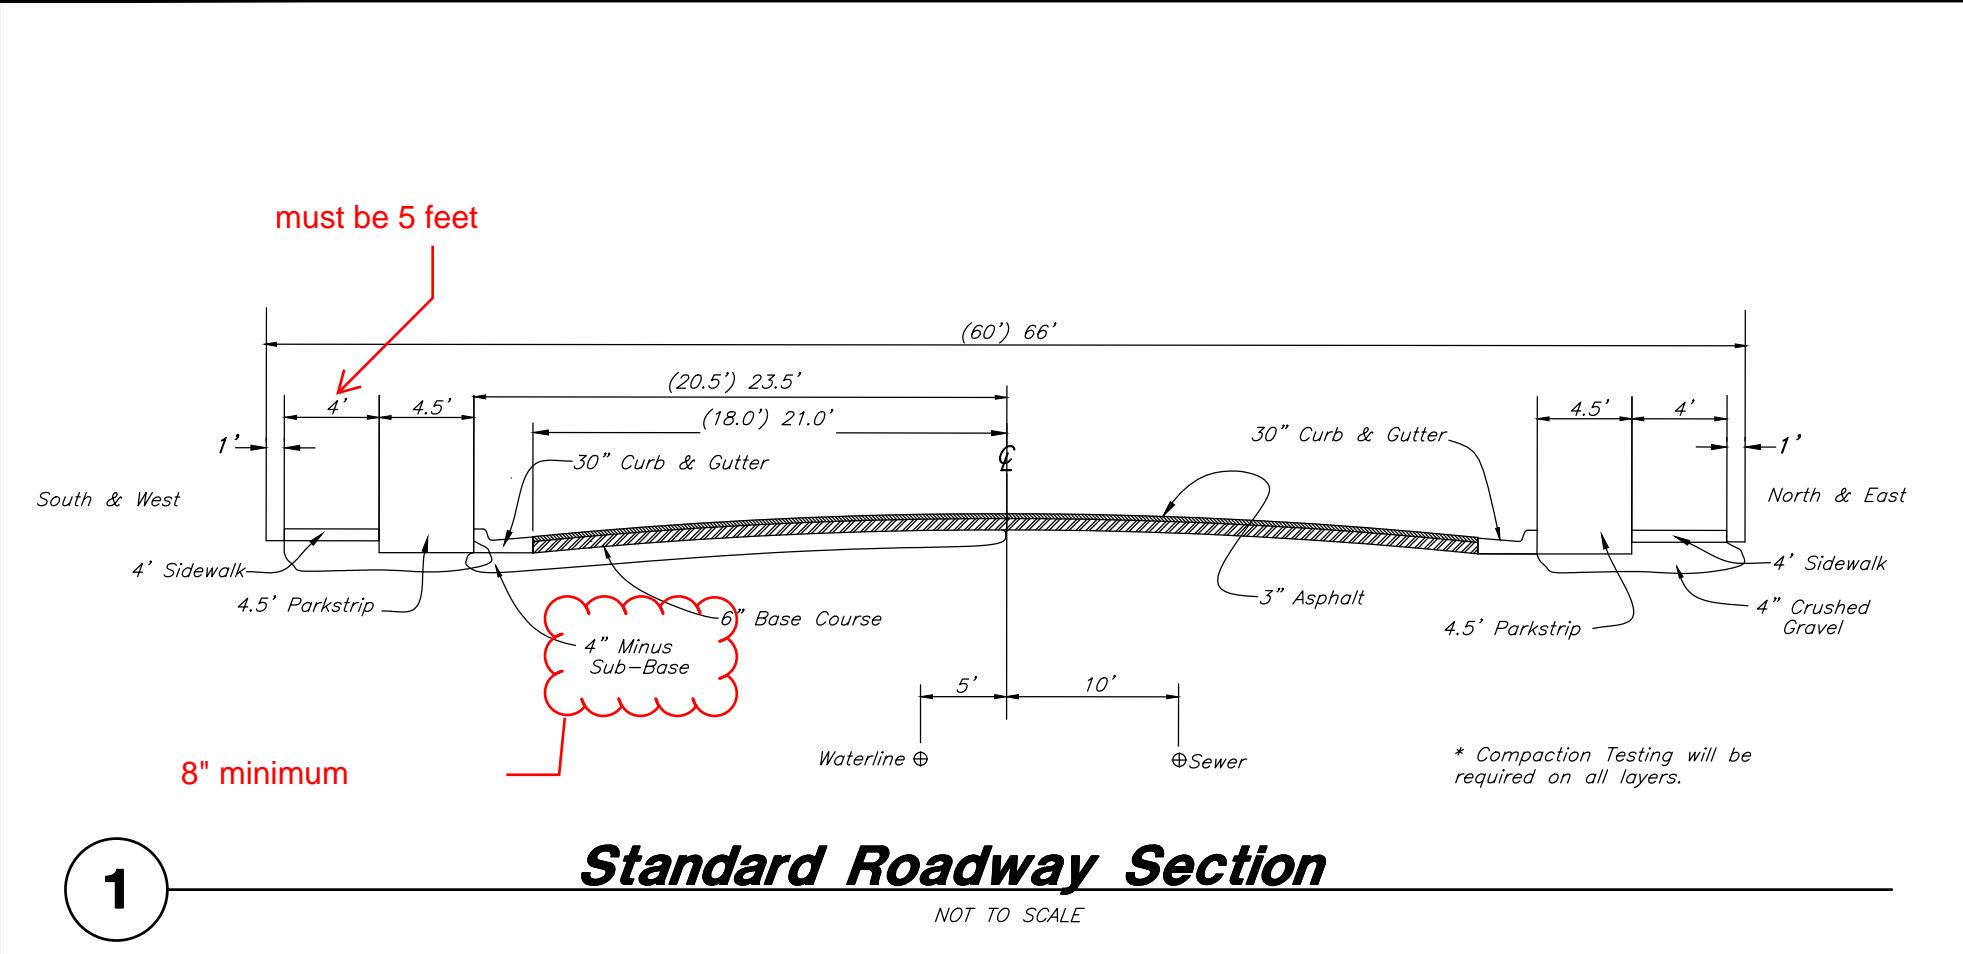

Is there a cross section of the trail improvements?

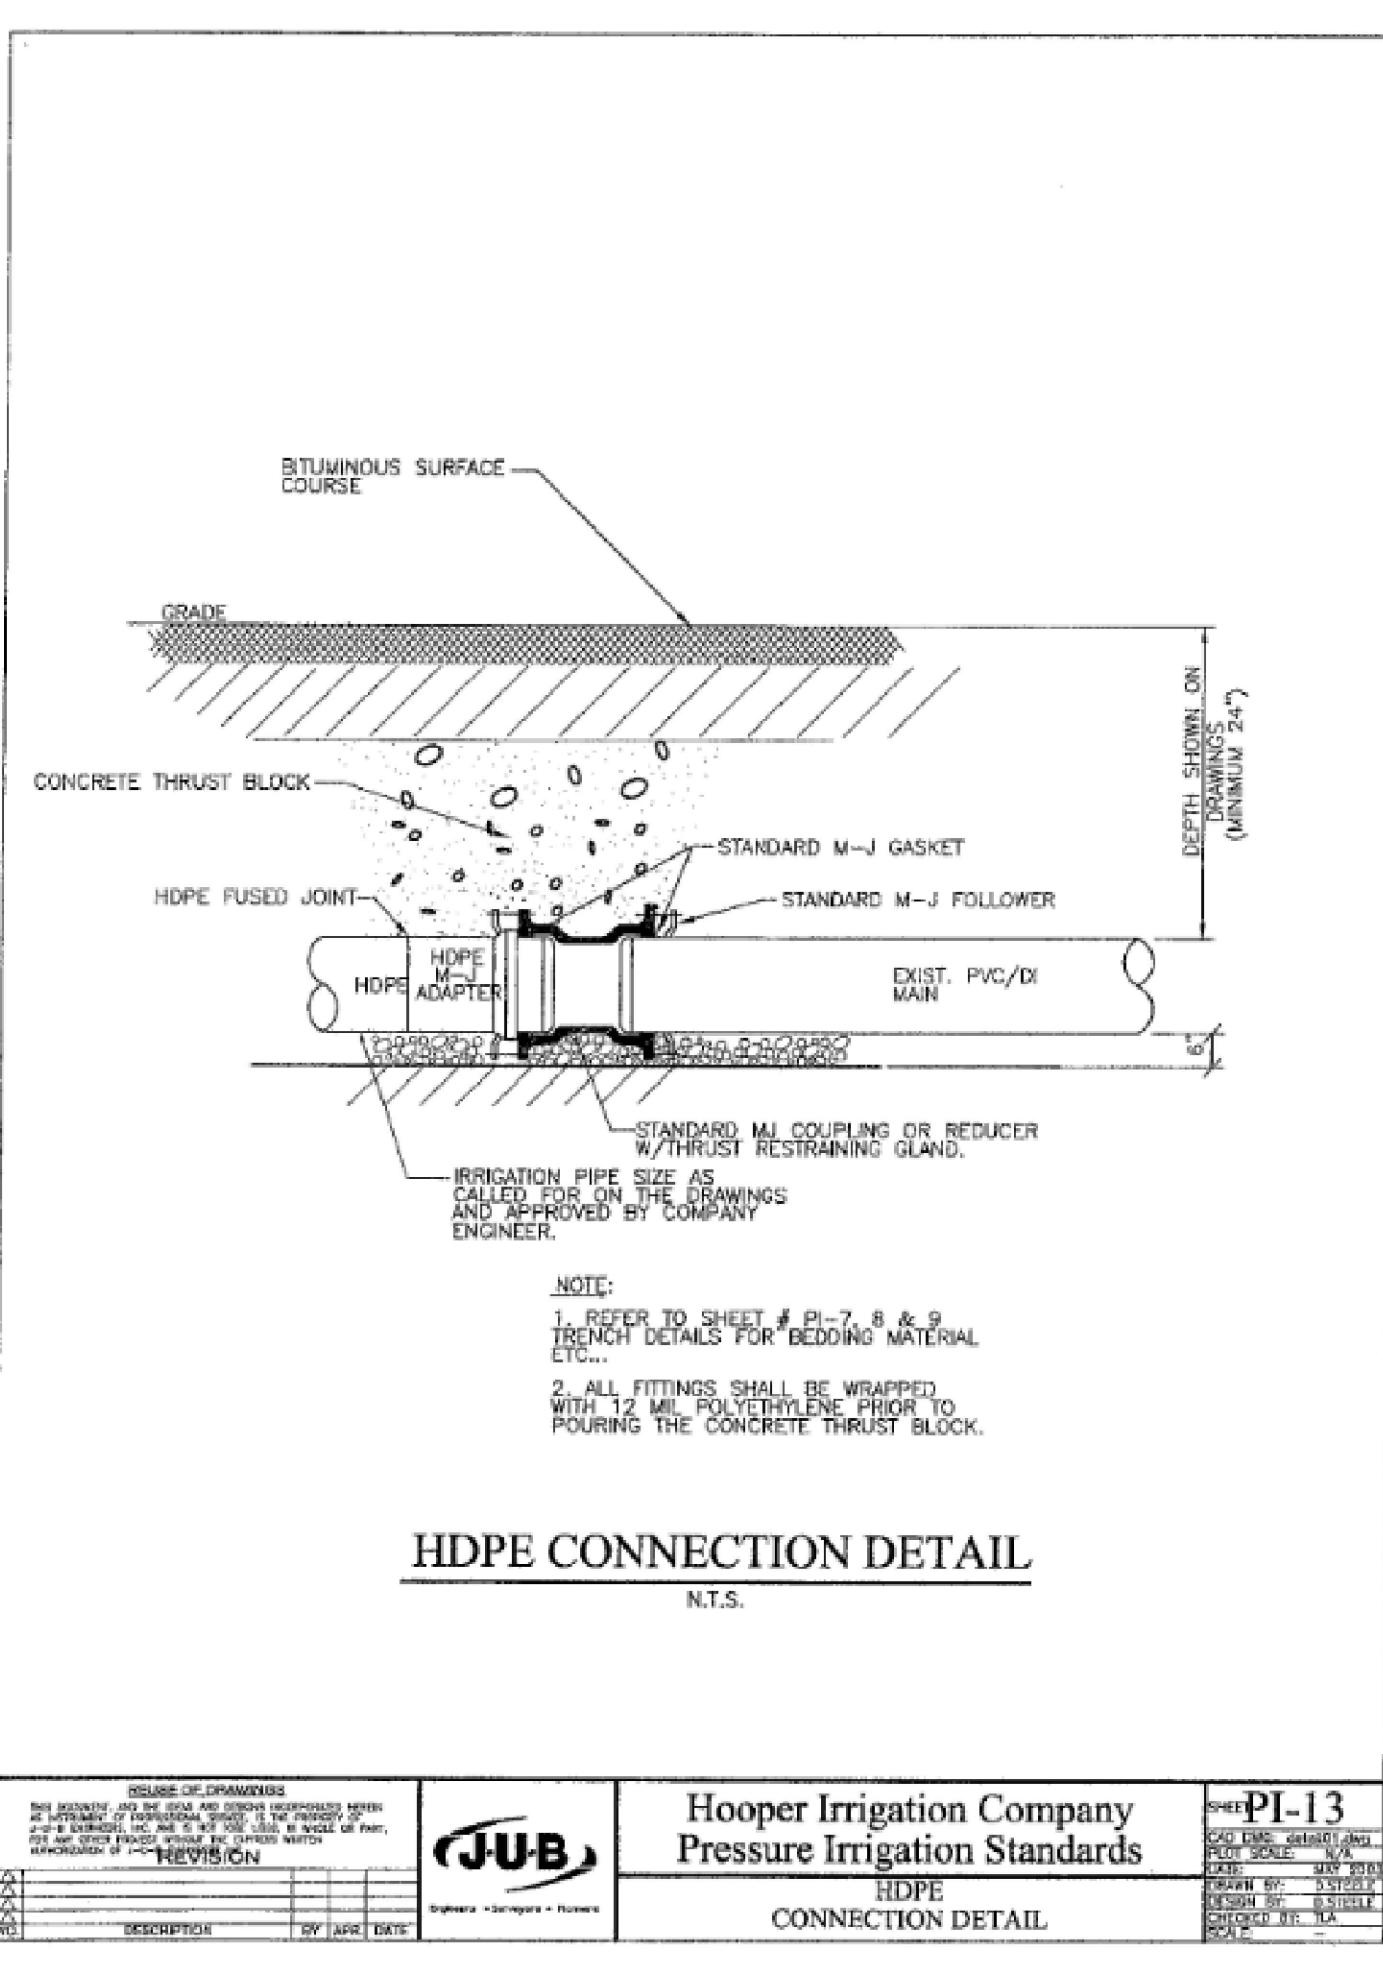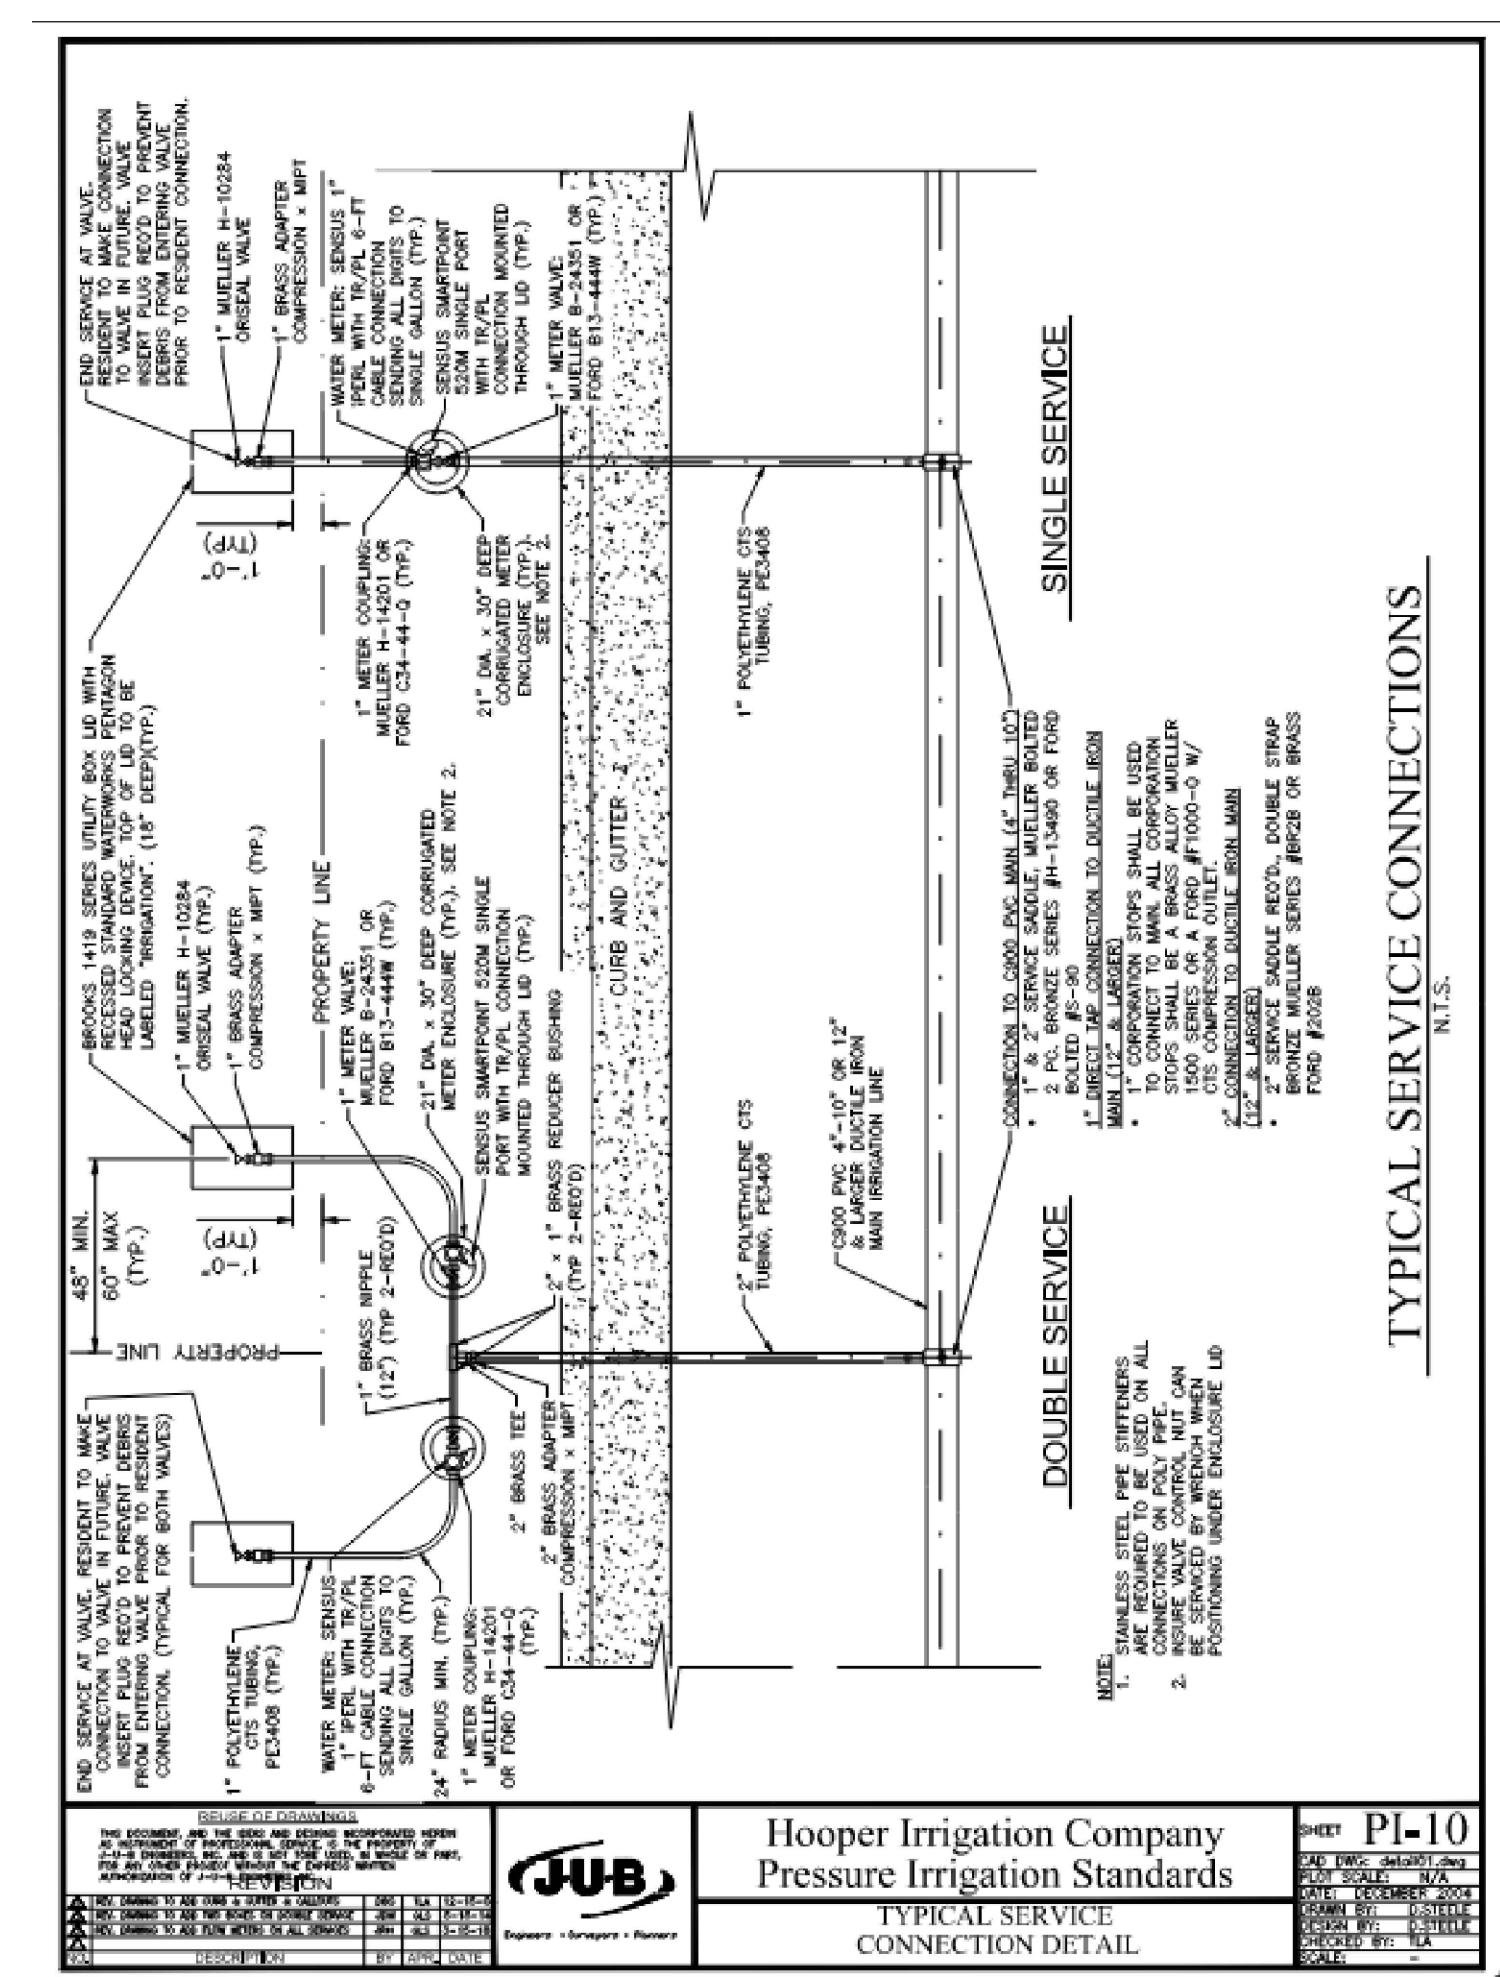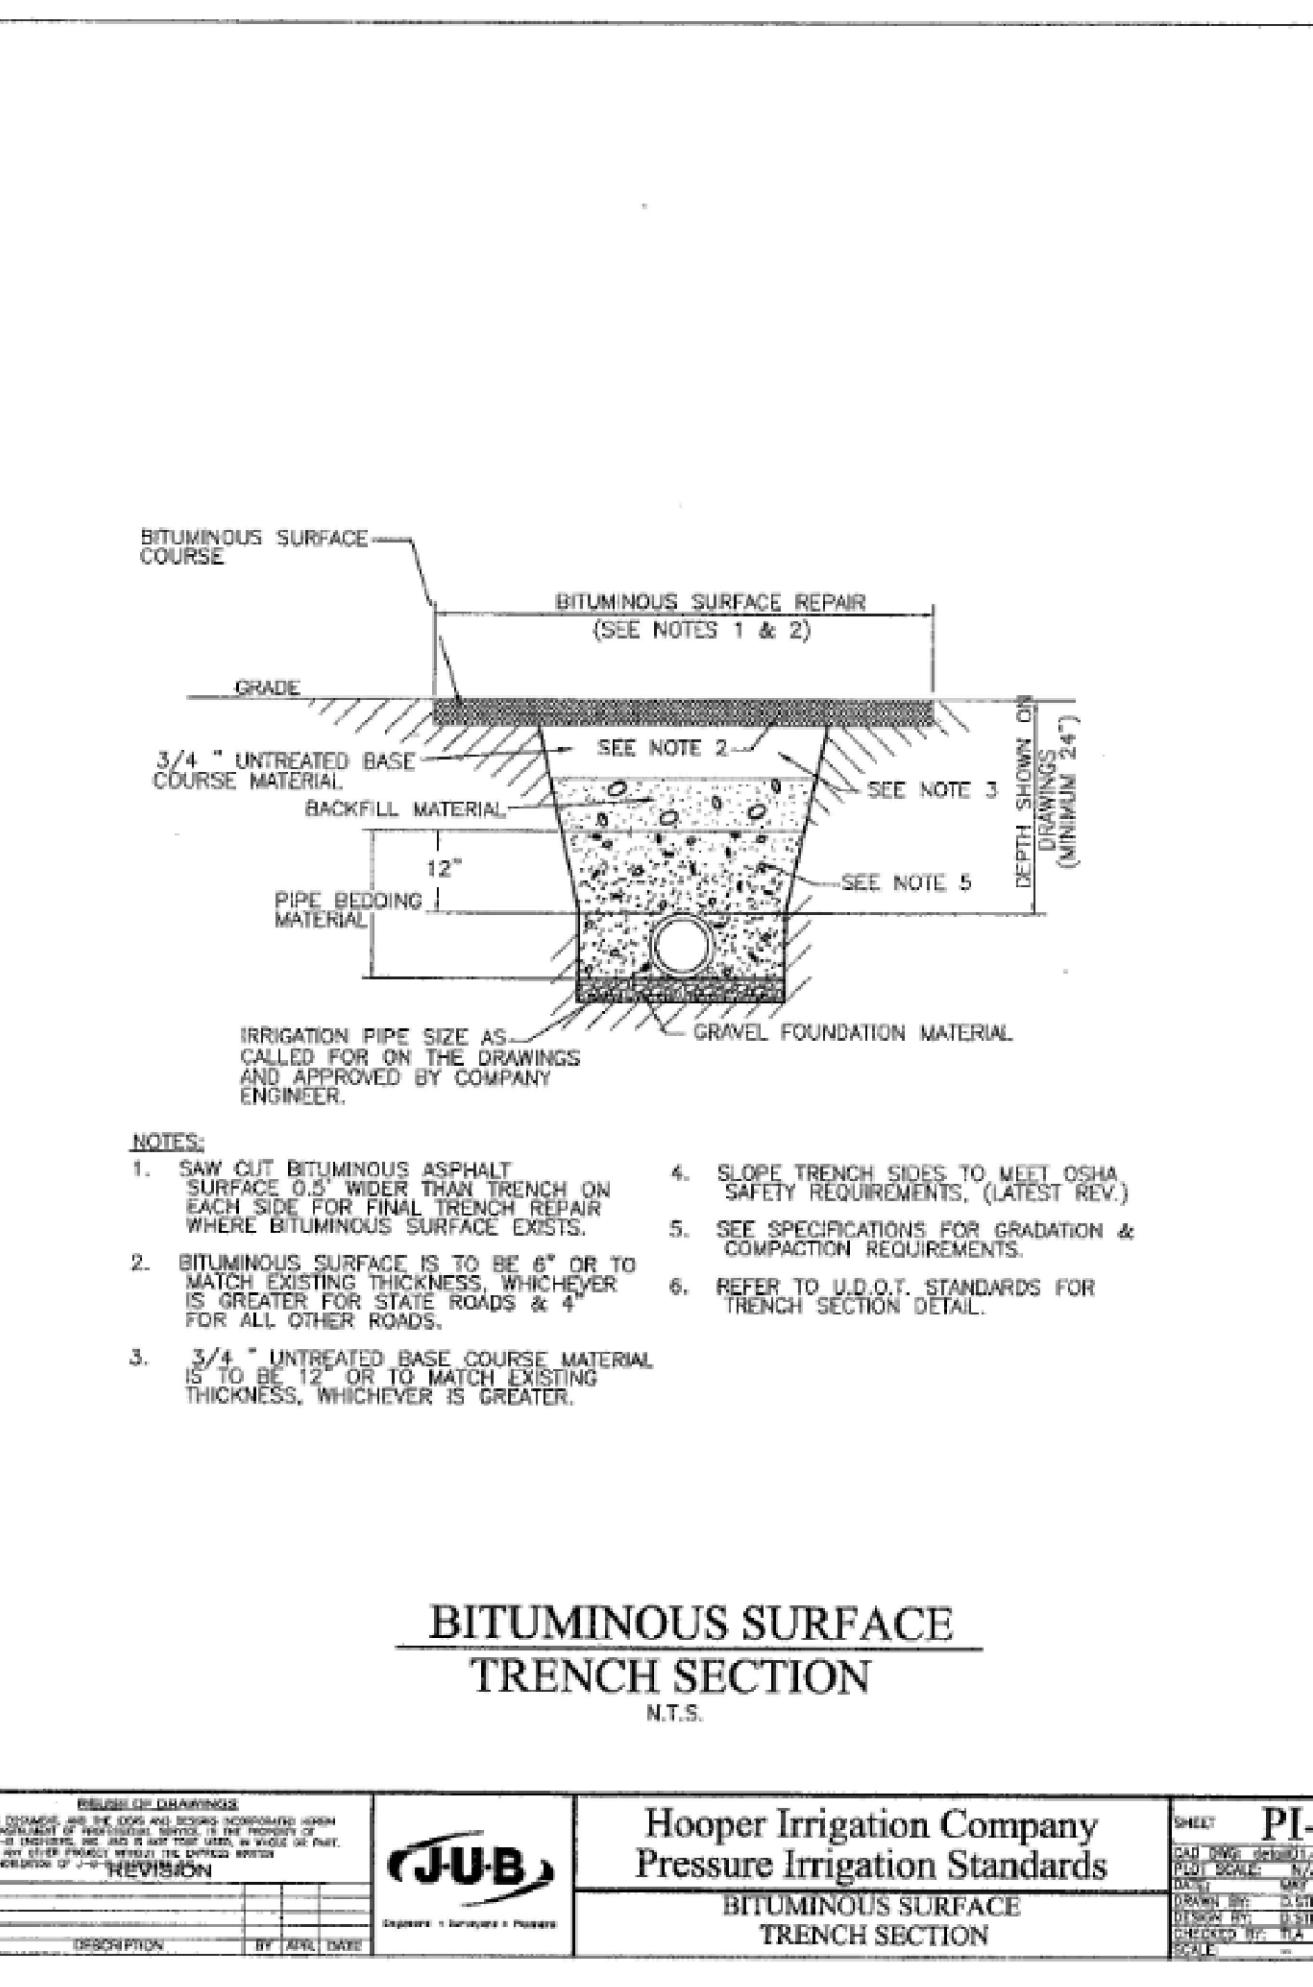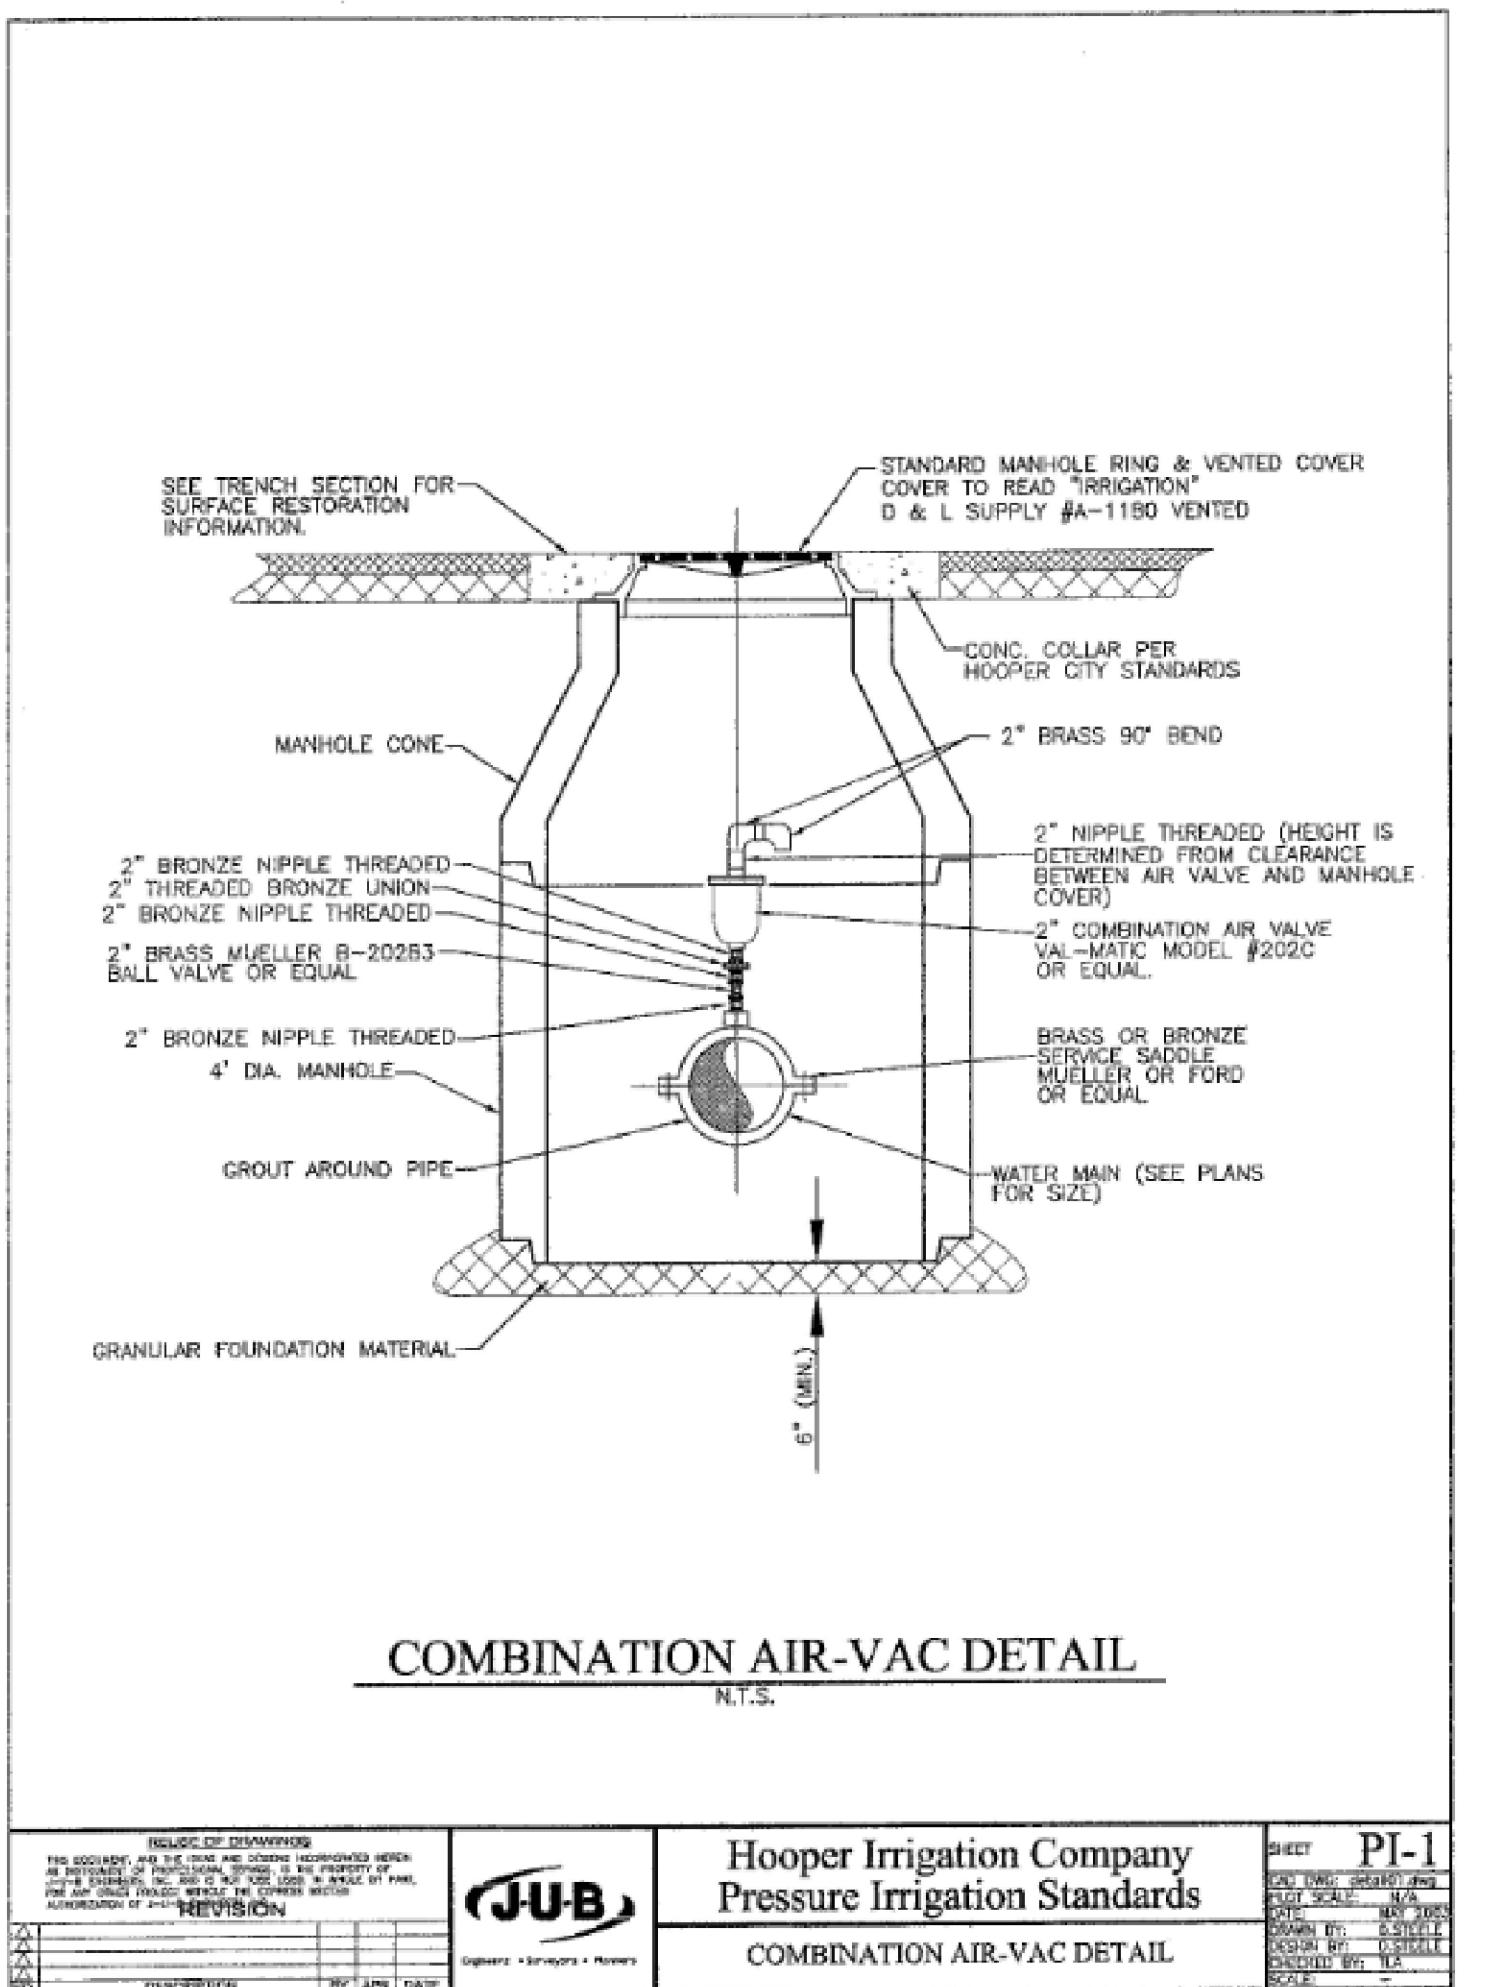

EAST BASIN ENGINEERING

Details

*part of the Southeast Quarter of Section 16 and the West Half of
Section 15, T6N, R2W, SLB&M, Weber County, Utah*

100

NOT FOR CONSTRUCTION

REVISION DATE DESCRIPTION

GREAT BASIN ENGINEERING
JUB Engineers • Surveyors • Planners
5746 SOUTH 115 EAST
MAIN (801) 345-1022, FAX (801) 342-4403
S.L.C., UTAH 84043
RE RE A T E R I N G . C O M

Riverbend Farm Phase 2
A part of the Southeast Quarter of Section 16 and the West Half of
Section 15, T6N, R2W, SLBM, Weber County, Utah


February 2024

SHEET NO.



C8

21N724 - BP



NOT FOR CONSTRUCTION

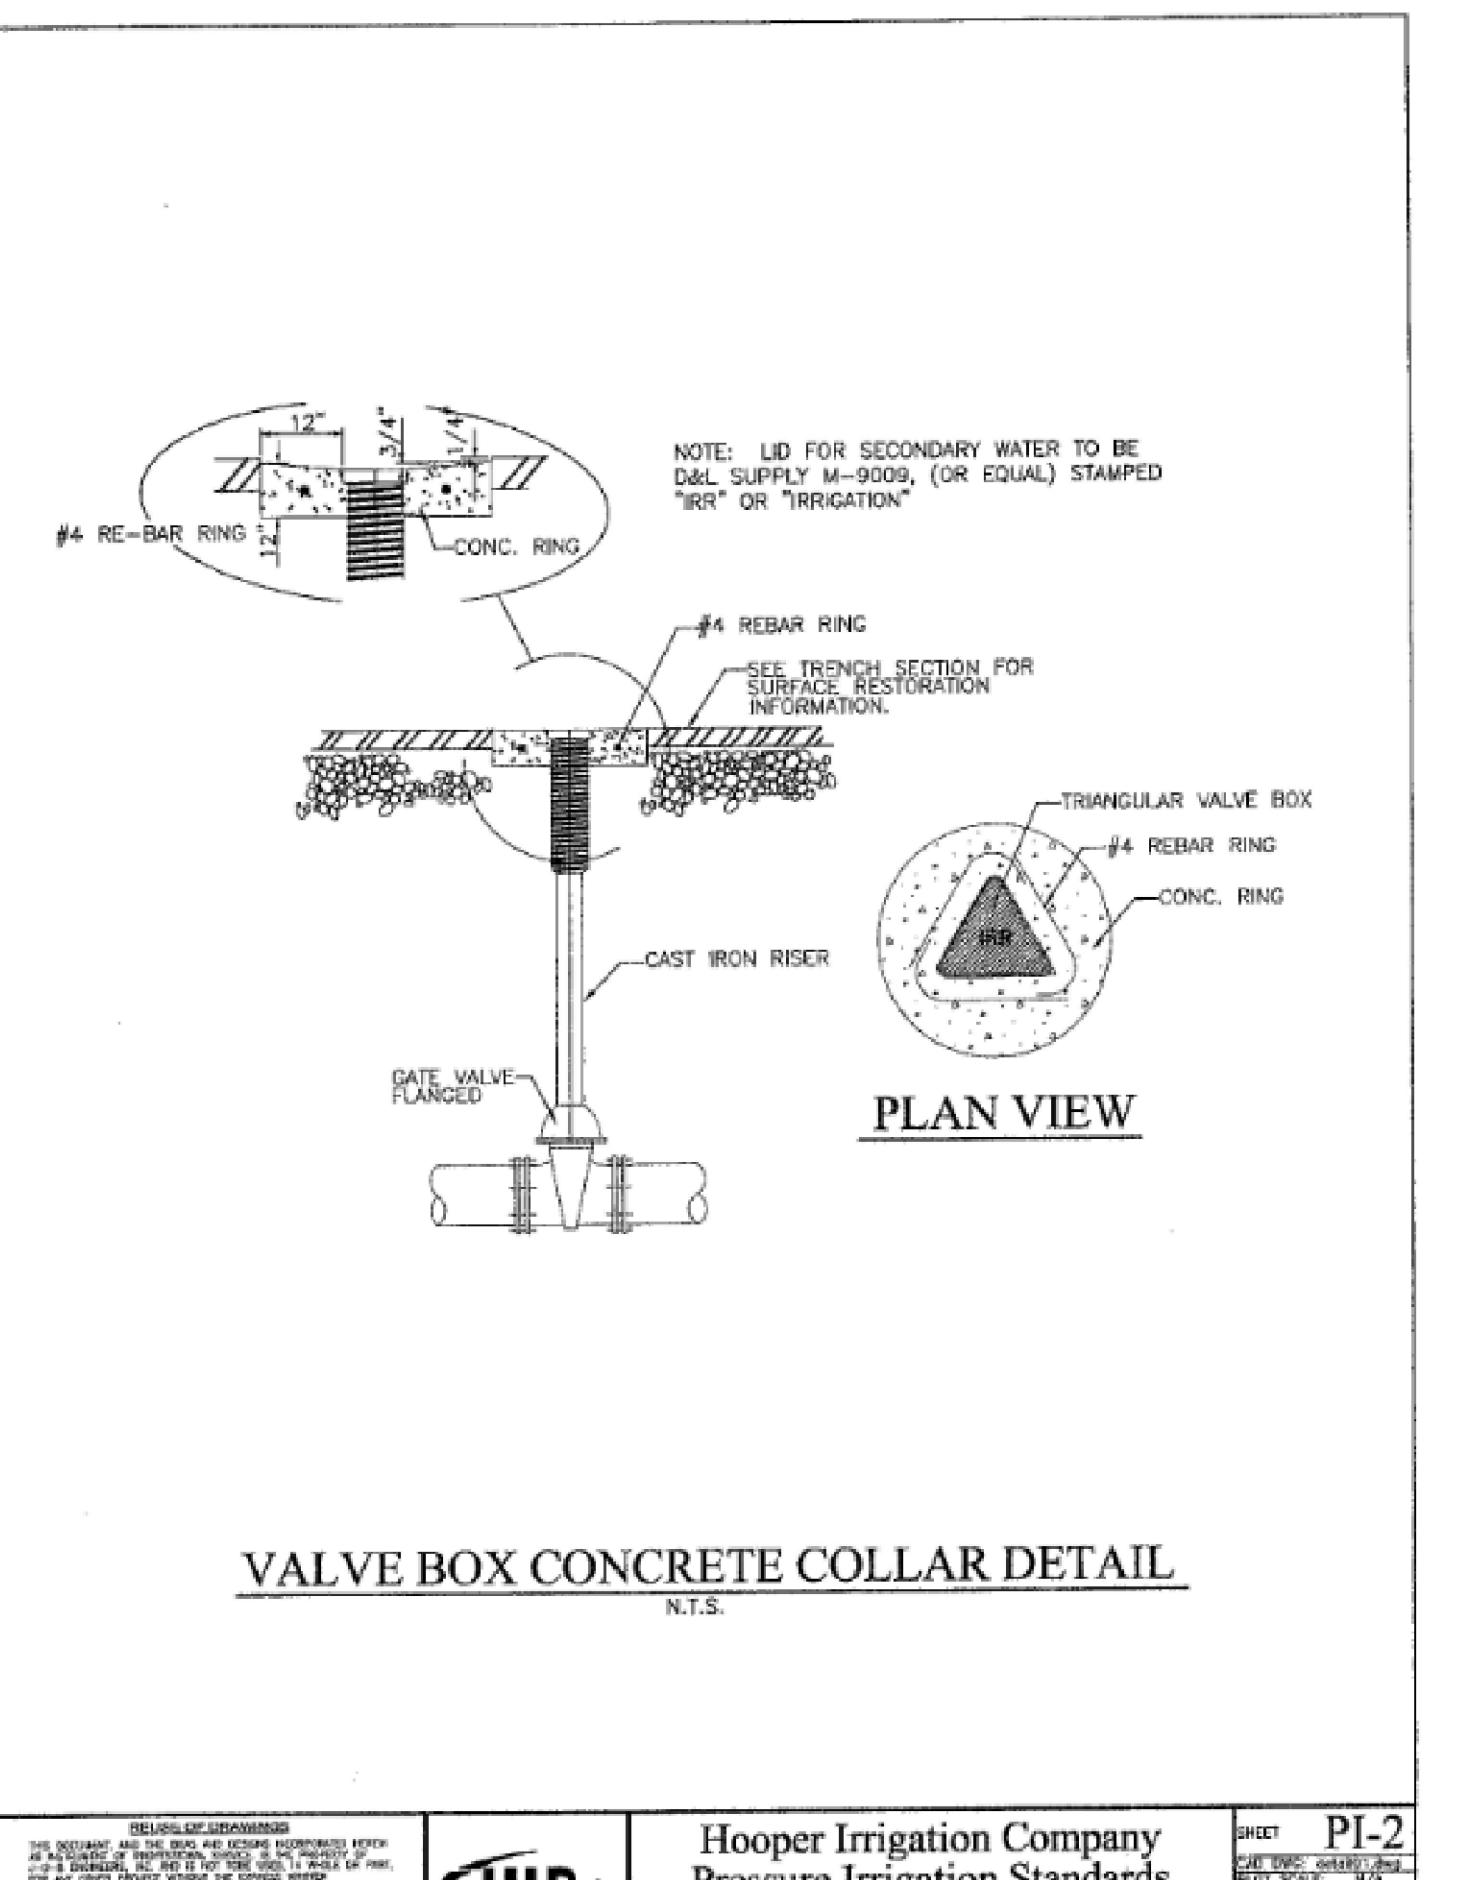



VALVE BOX CONCRETE COLLAR DETAIL
N.T.S.

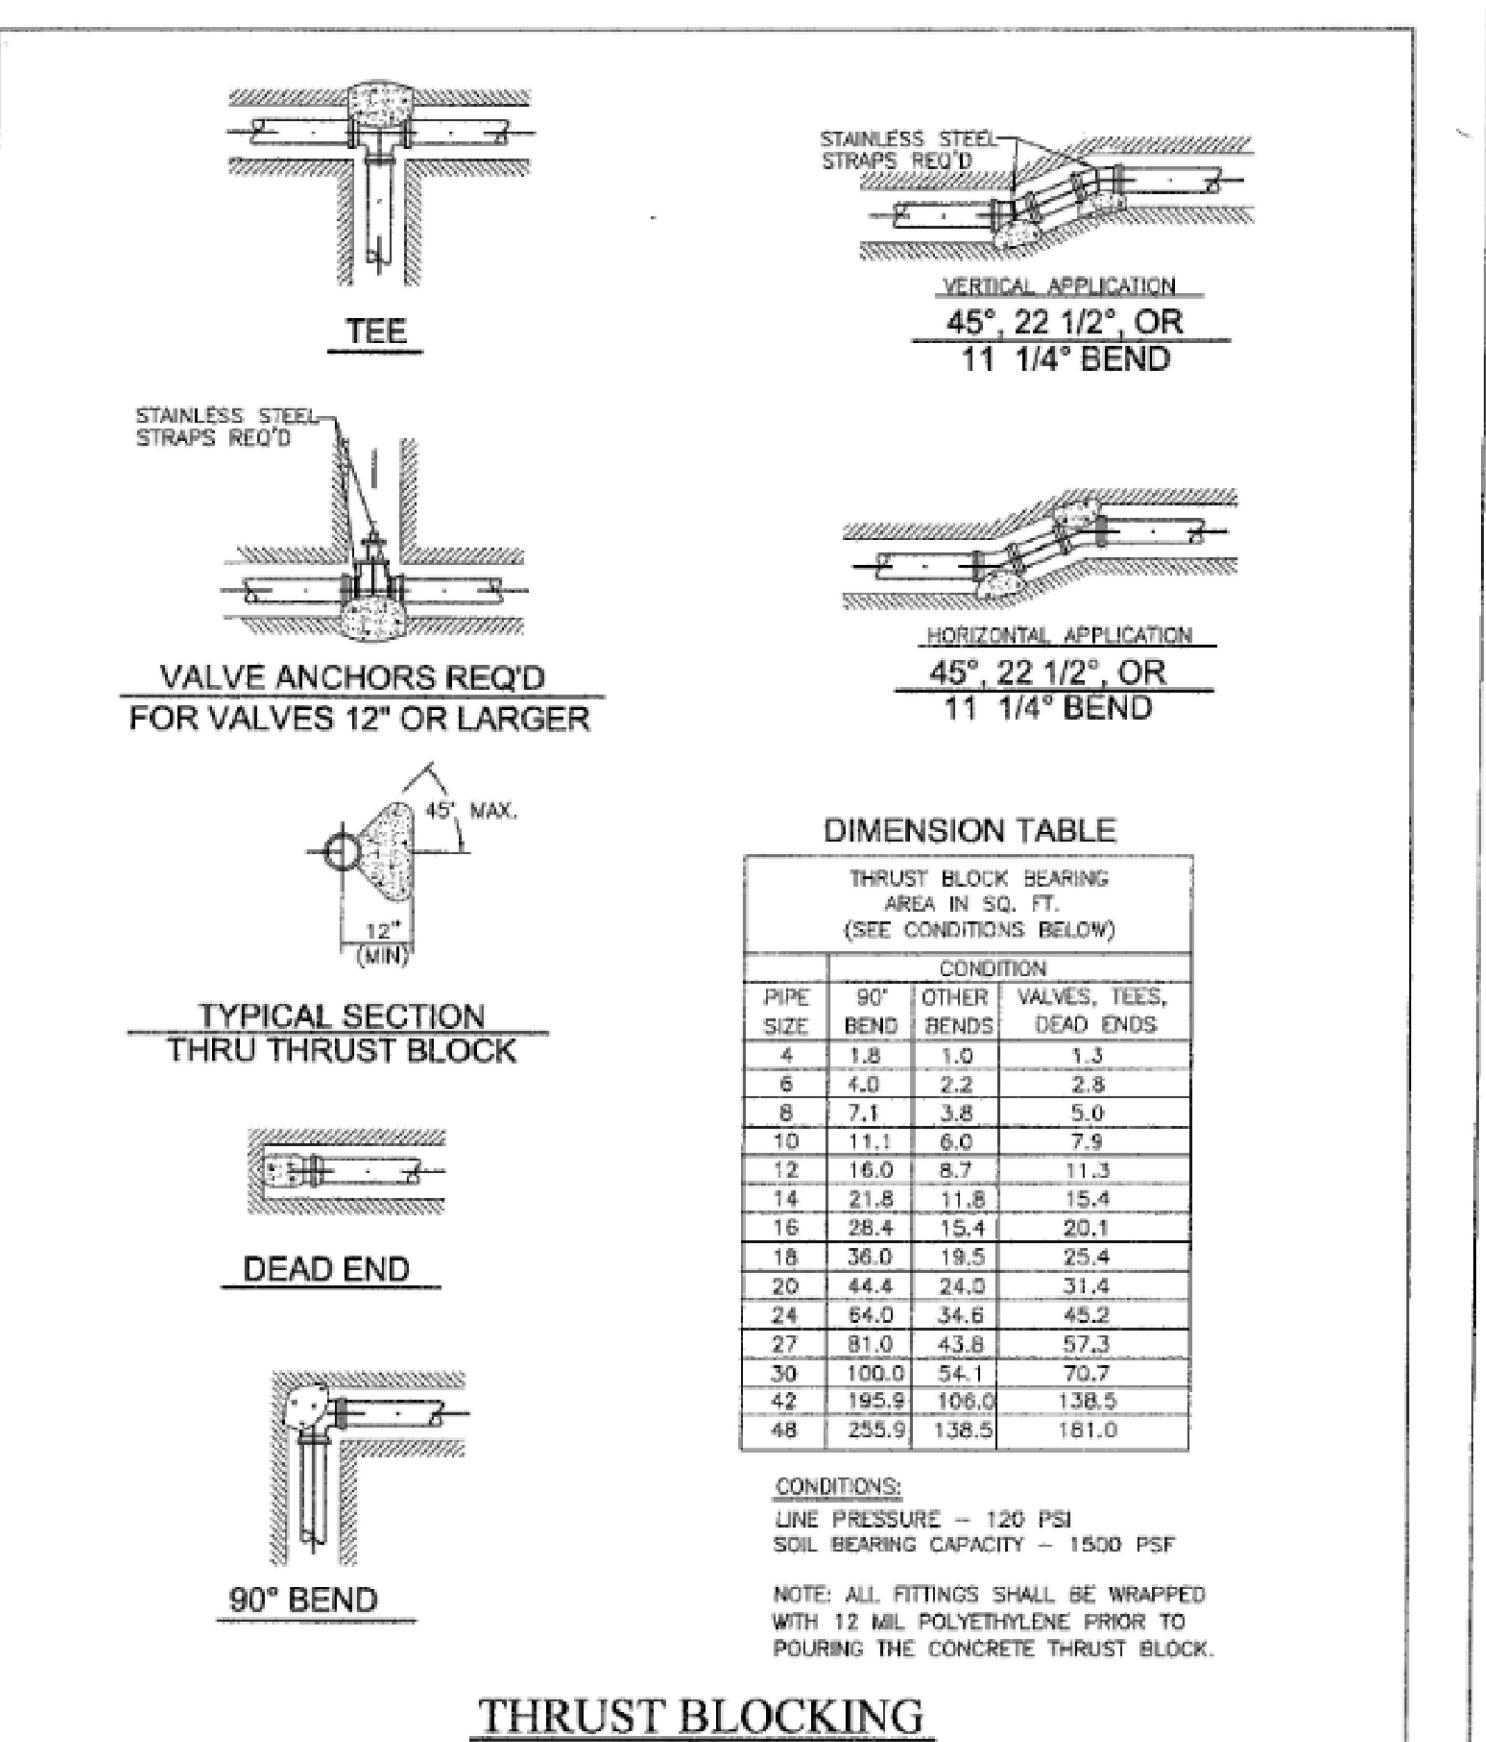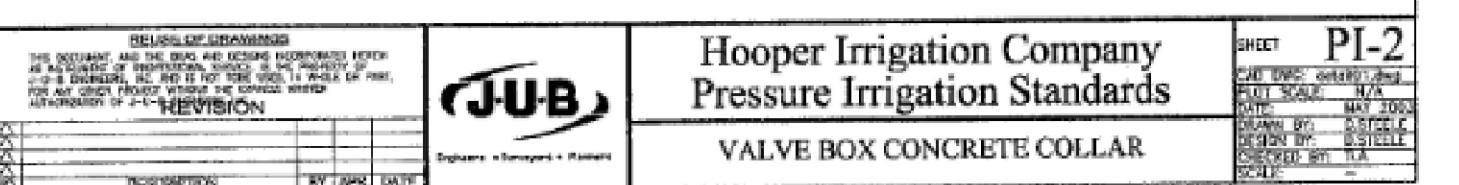



THRUST BLOCKING
N.T.S.

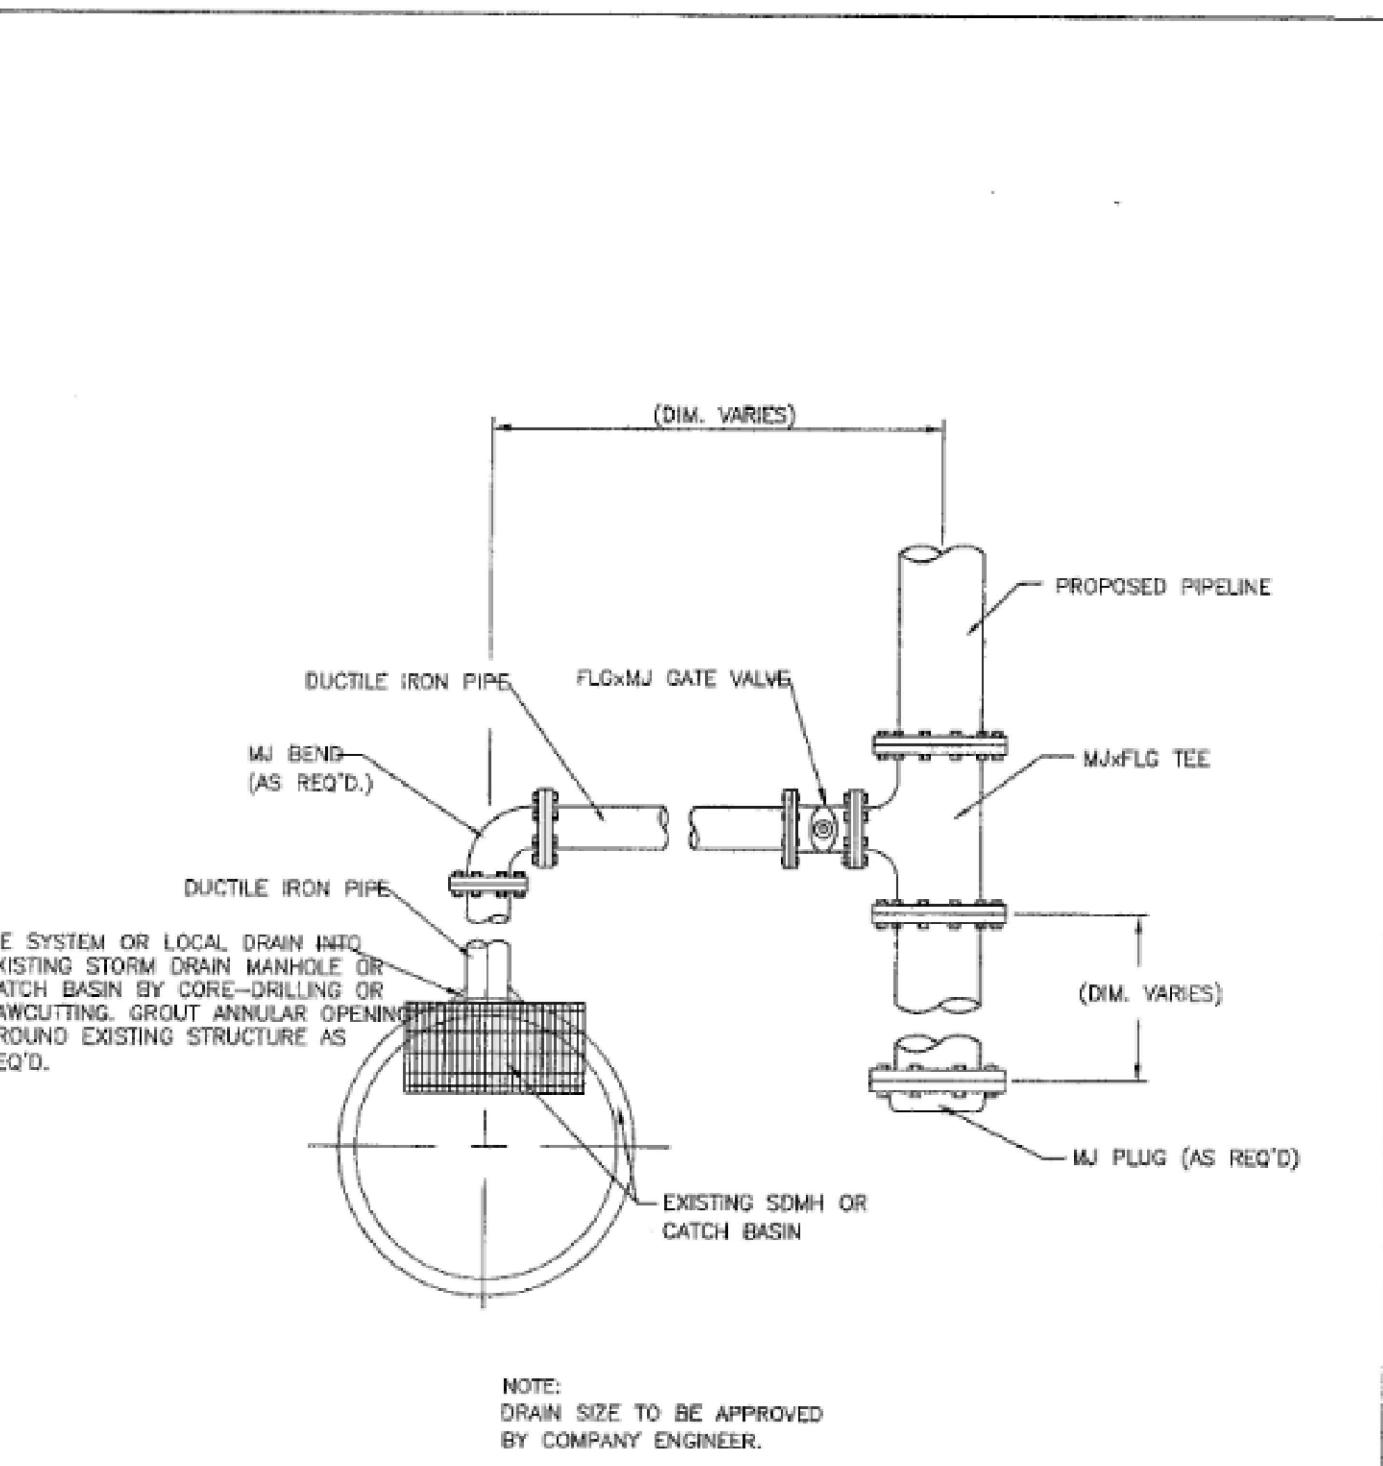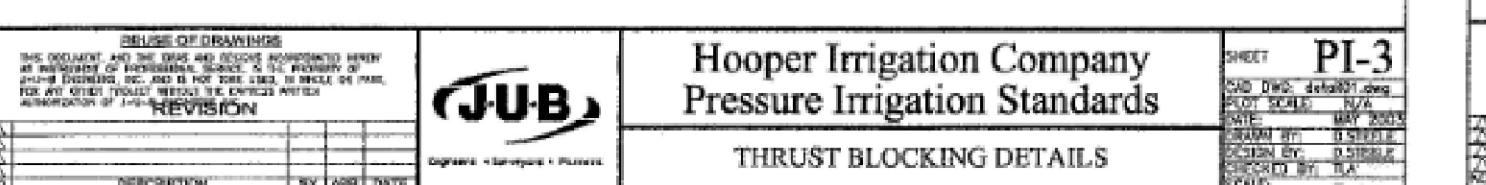


LOCAL / SYSTEM DRAIN DETAIL
N.T.S.

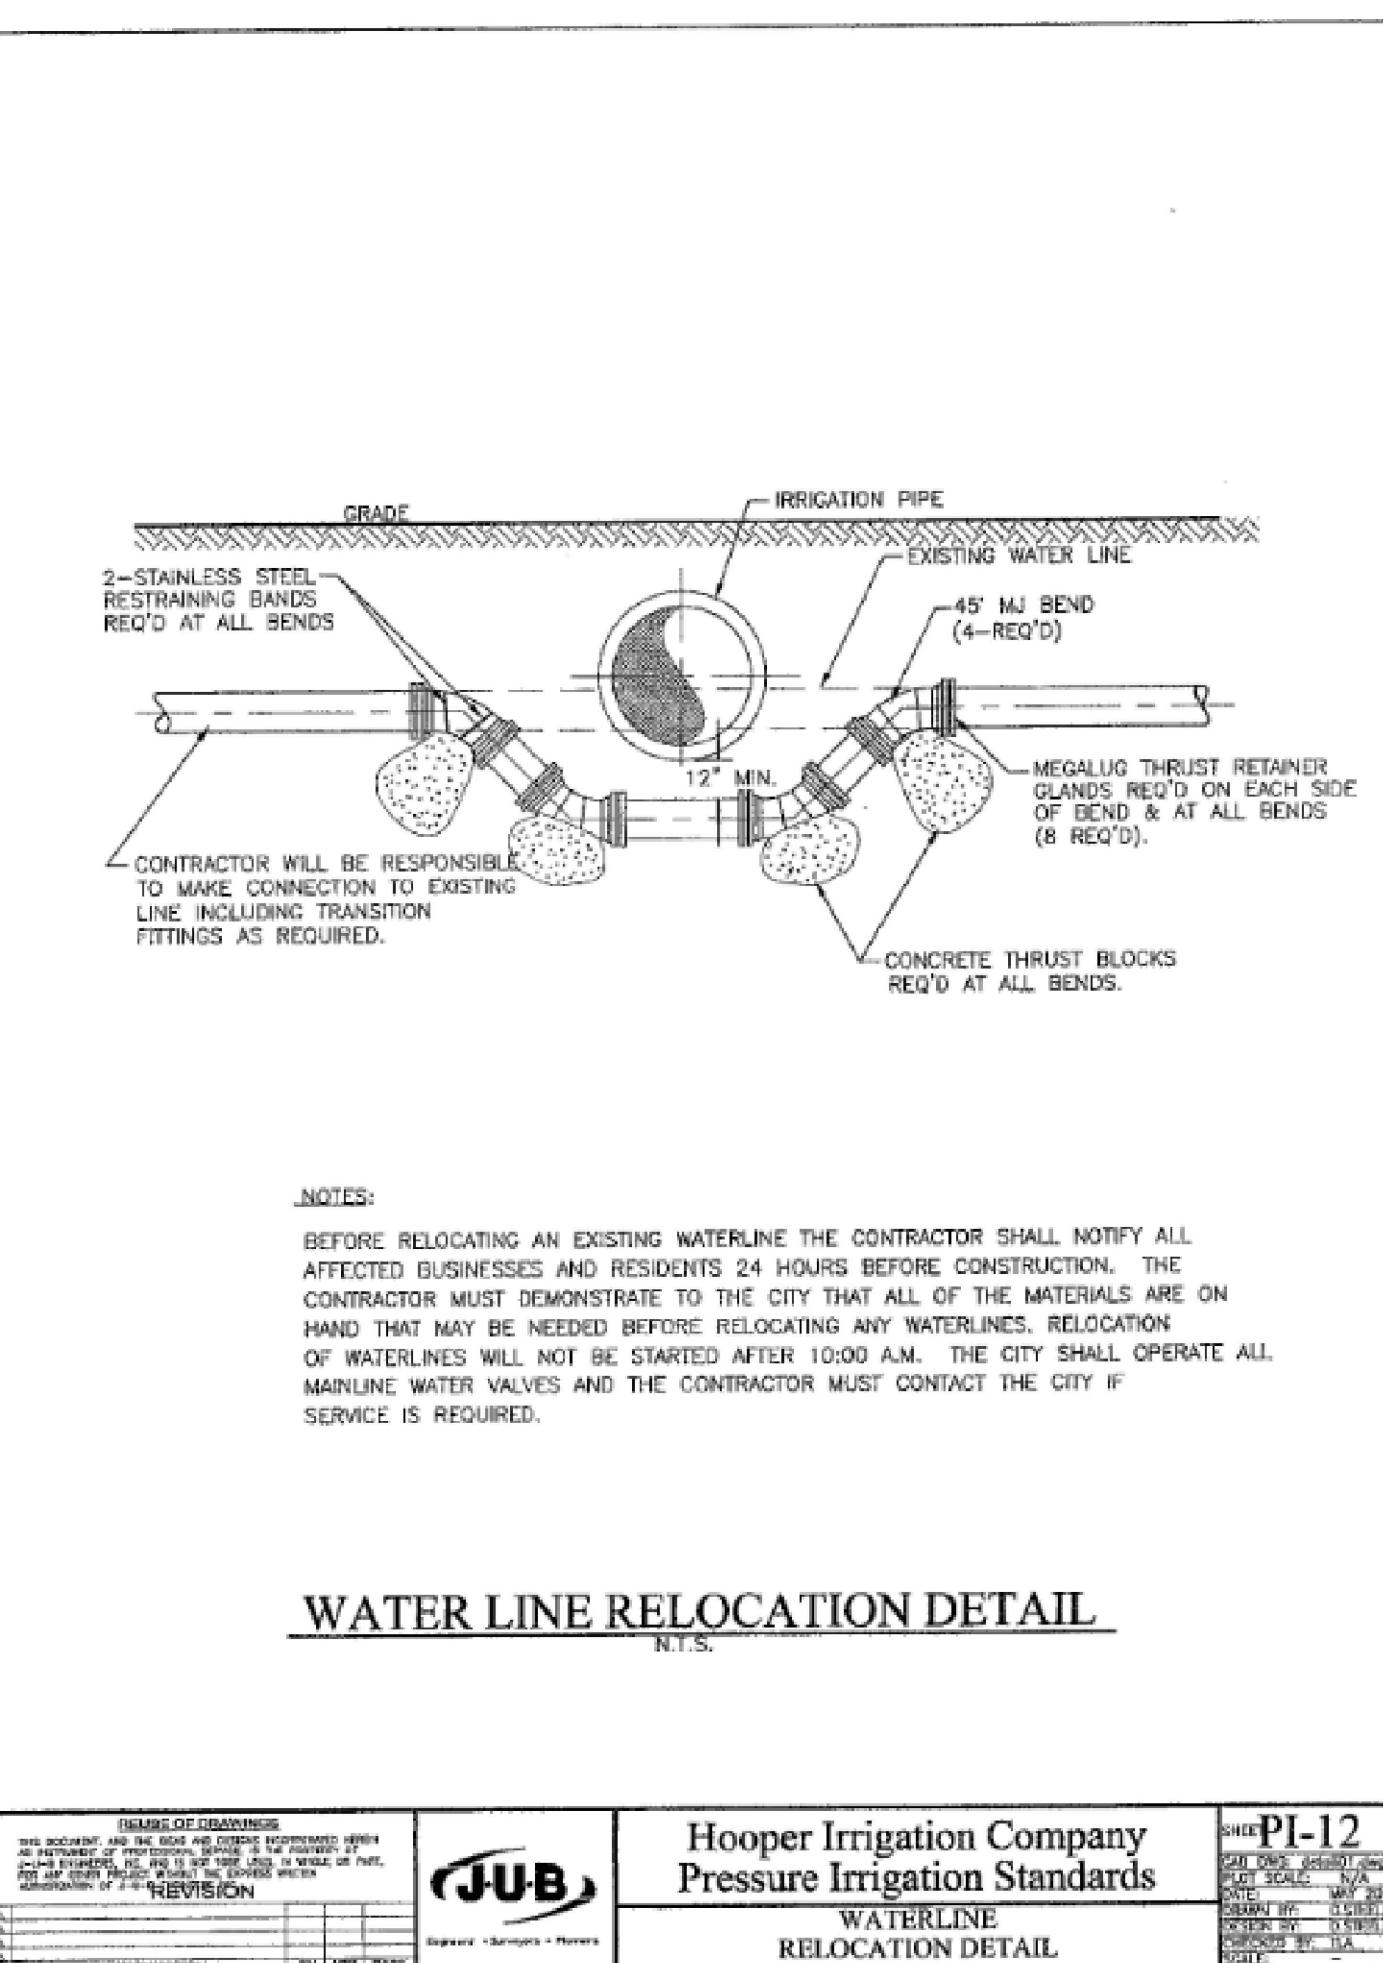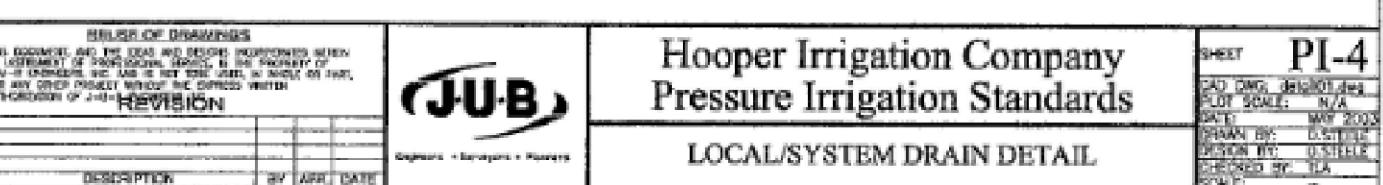




WATER LINE RELOCATION DETAIL
N.T.S.

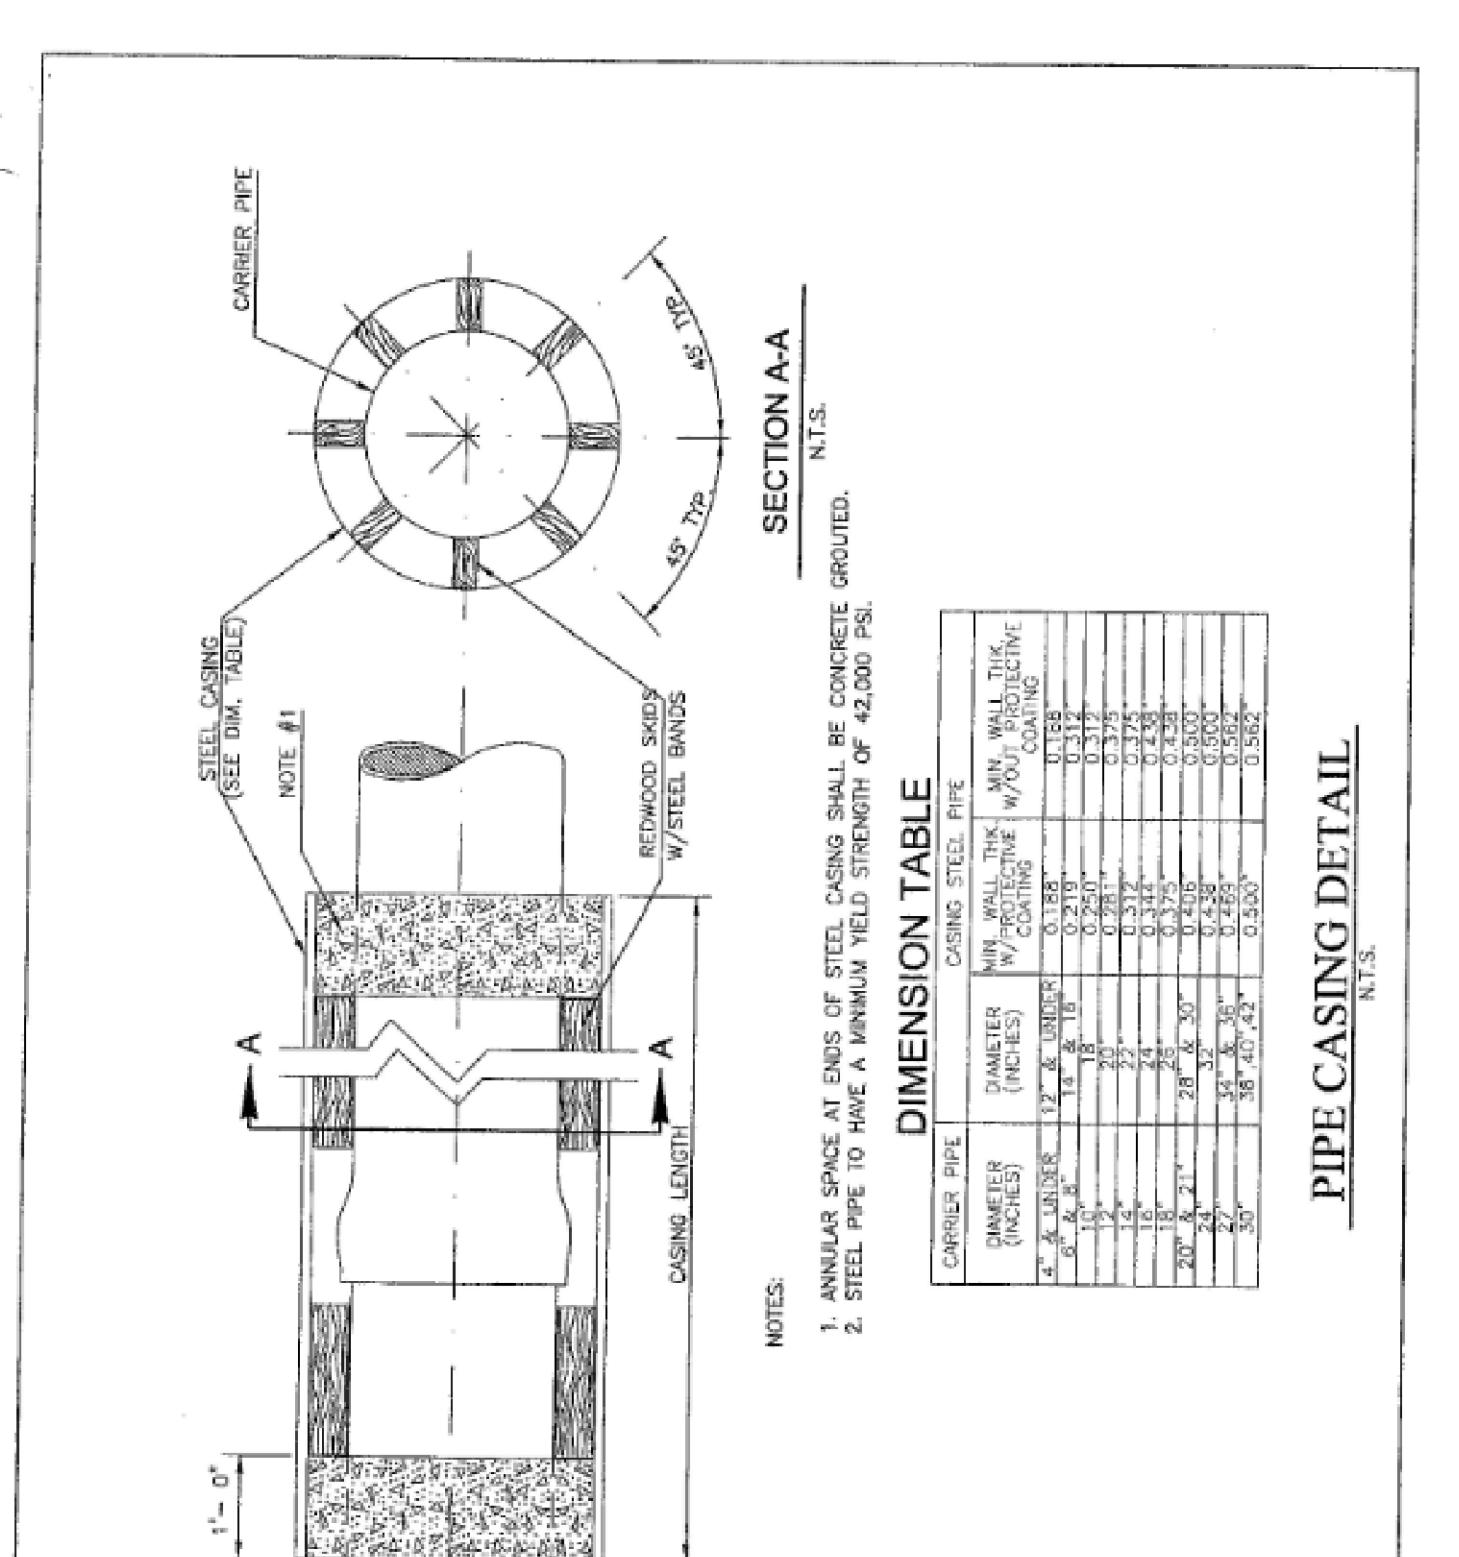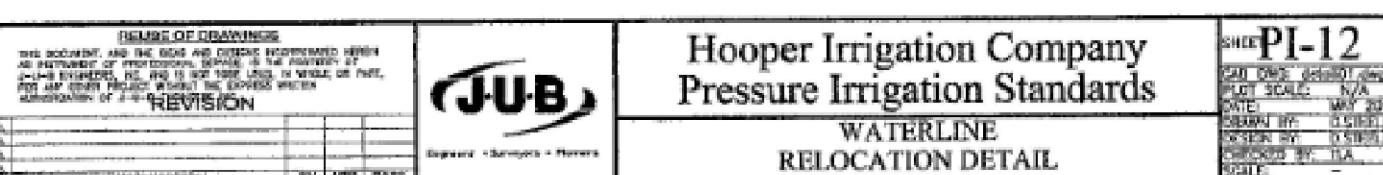

PIPE CASING DETAIL
N.T.S.

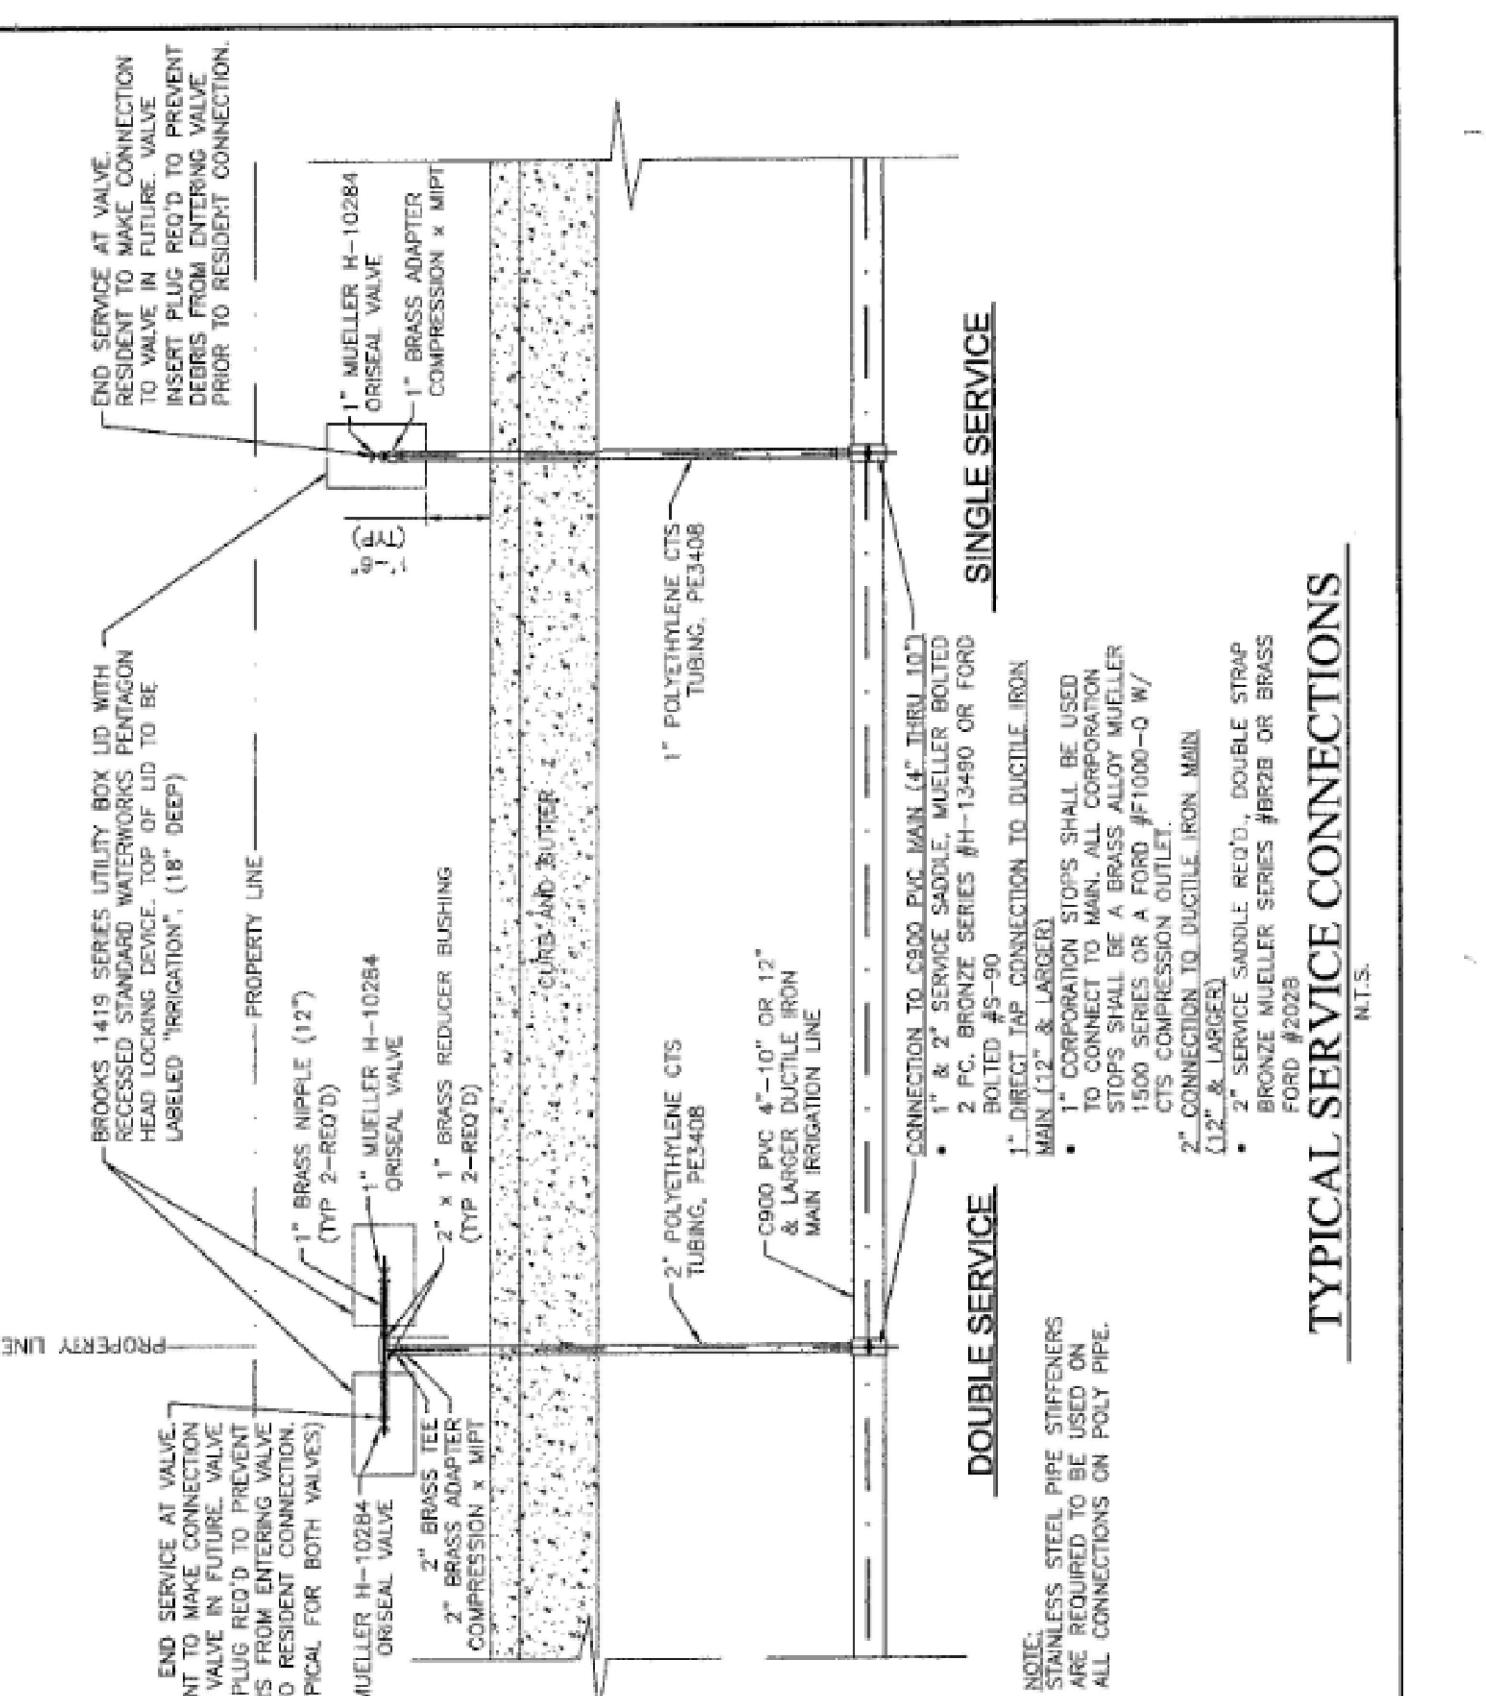

TYPICAL SERVICE CONNECTIONS
N.T.S.

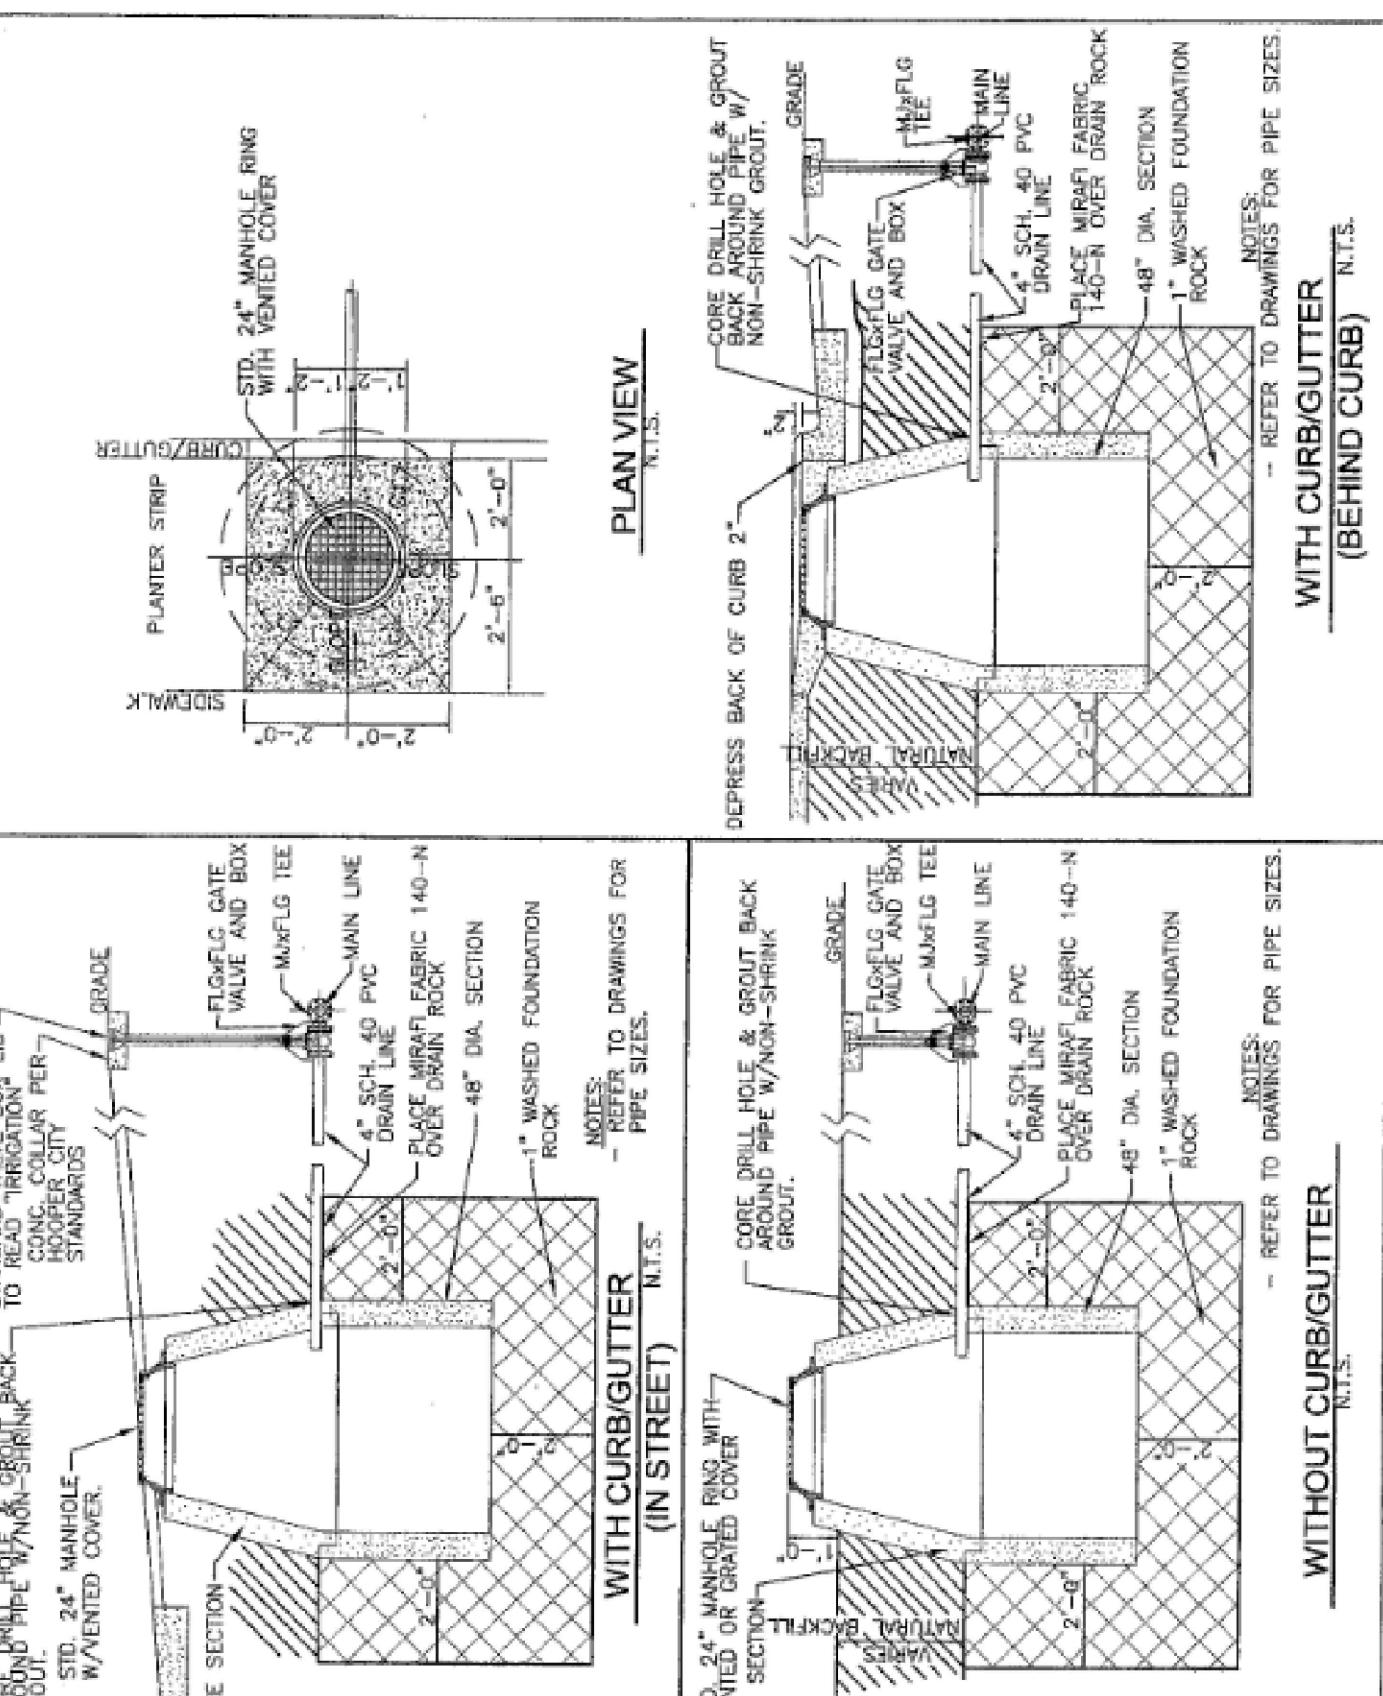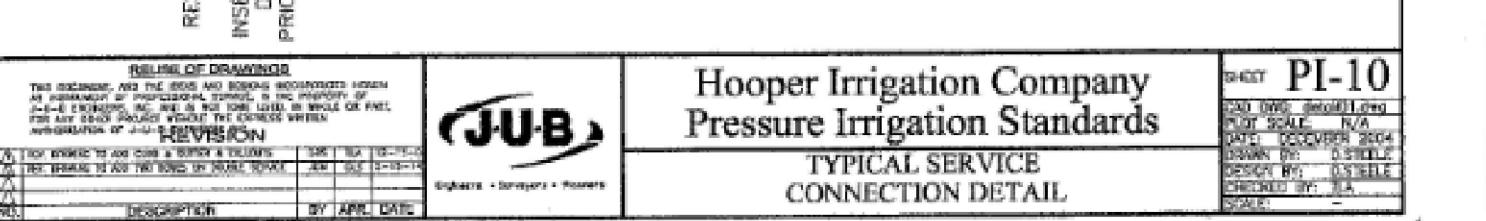

Details

Riverbend Farm Phase 2

A part of the Southeast Quarter of Section 16 and the West Half of Section 15, T6N, R2W, SLBM, Weber County, Utah

February 2024

SHEET NO.

C8

21N724 - BP