

Mad Moose Doors/Windows Design Review



3.) Change 3 of 4: East Facing Wall new panel door and windows installation: To enhance customer comfort and Mad Moose Café curb appeal. To be completed within 18 months of Design Review approval.




New Wall / Sliding Panel Door Window Layout **Specifications:** 1. Install two sliding door systems 8'h x 14' w marked in green on east facing wall. 2. Add ~225 SF additional space indicated by "dotted" area in SW corner of café.

1. New Sliding Panel Window / Doors

(Location depicted by two solid green lines on east facing wall.)

2. Additional Space

West of Hood "dotted"
`225 SF. Includes new
doors in red, new
windows depicted in
green. Windows
added for customer
viewing from within
café. No walls
removed, only 1 wall,
2 doors, 4 windows
added to new room
(New wall indicated by
hash marks).

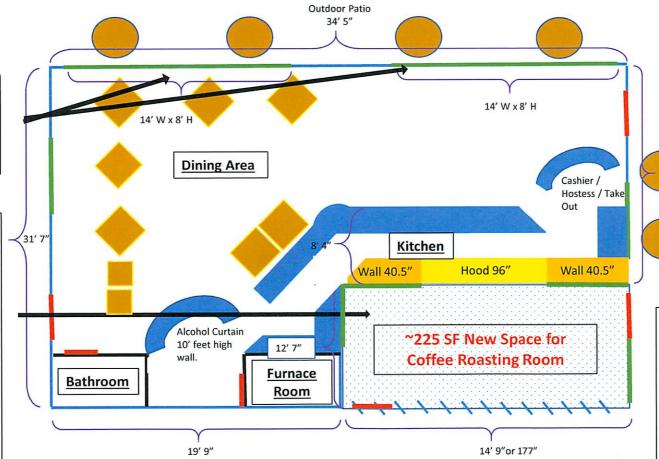

BLUE = Counter Space / Kitchen

Outdoor Patio

18' 11"

RED = Door

BROWN = Tables (Square Indoor, Round Outdoor)

GREEN = Windows

PURPLE = Dimensions (Total Interior SF: 900)

YELLOW = Width of Hood (Centered on 14' 9" wall)

ORANGE = 40.5" distance from edges of wall to edge of Hood

.

Proposed 12' window /
door systems (2 each) in
place of windows on East
facing wall (South side of
wall depicted)

Approx 1' thick wall

Proposed 12' window / door systems (North side of wall depicted)








Center of wall where chimney is on outside will remain in place. Chimney approx. 4' wide (behind depicted chalk board). Present windows dimension is 5'w x 4"h.






Location of proposed 12' window / door systems (two each – one on each side of Chimney).

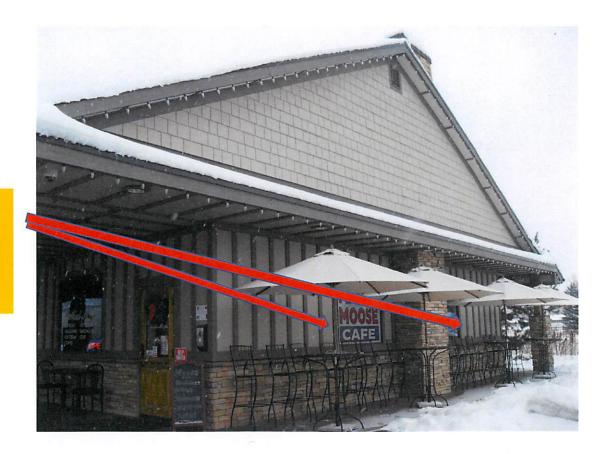





Proposed 12' panel window / door systems. Two total systems, one on each side of chimney.

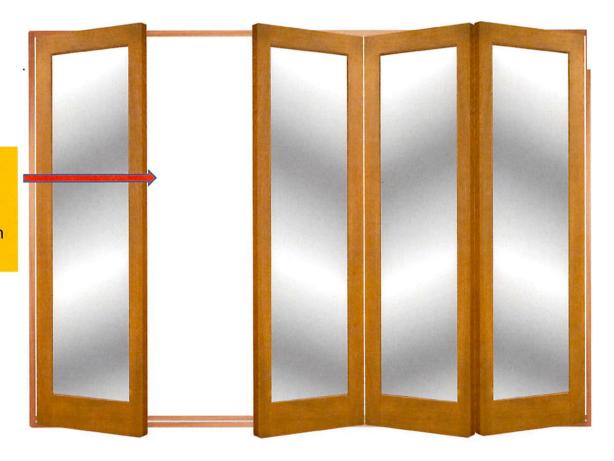



Location of proposed 12' window / door systems (two each – one on each side of Chimney).

