


NOTICE!
EXISTING UTILITIES ARE SHOWN ON PLANS FOR THE CONVI-
DENCE OF THE CONTRACTOR
ONLY. THE CONTRACTOR IS
RESPONSIBLE FOR THE PRO-
TECTION OF ALL UTILITIES.
THE ENGINEER BEARS NO RES-
PONSIBILITY FOR UTILITIES NOT
SHOWN OR SHOWN INCORRECTLY.

Call
BEFORE YOU
DIG

1-800-662-4111
UNDERGROUND SERVICE

Engineer's Notice To Contractors
The existence and location of any underground utility pipes or structures shown on these plans were obtained from available information provided by others. The locations shown are approximate and shall be confirmed in the field by the contractor, so that any necessary adjustment can be made in alignment and/or grade of the proposed improvement. The contractor is required to contact the utility companies and take due precautionary measure to protect any utility lines shown, and any other lines obtained by the contractor's research, and others not of record or not shown on these plans.

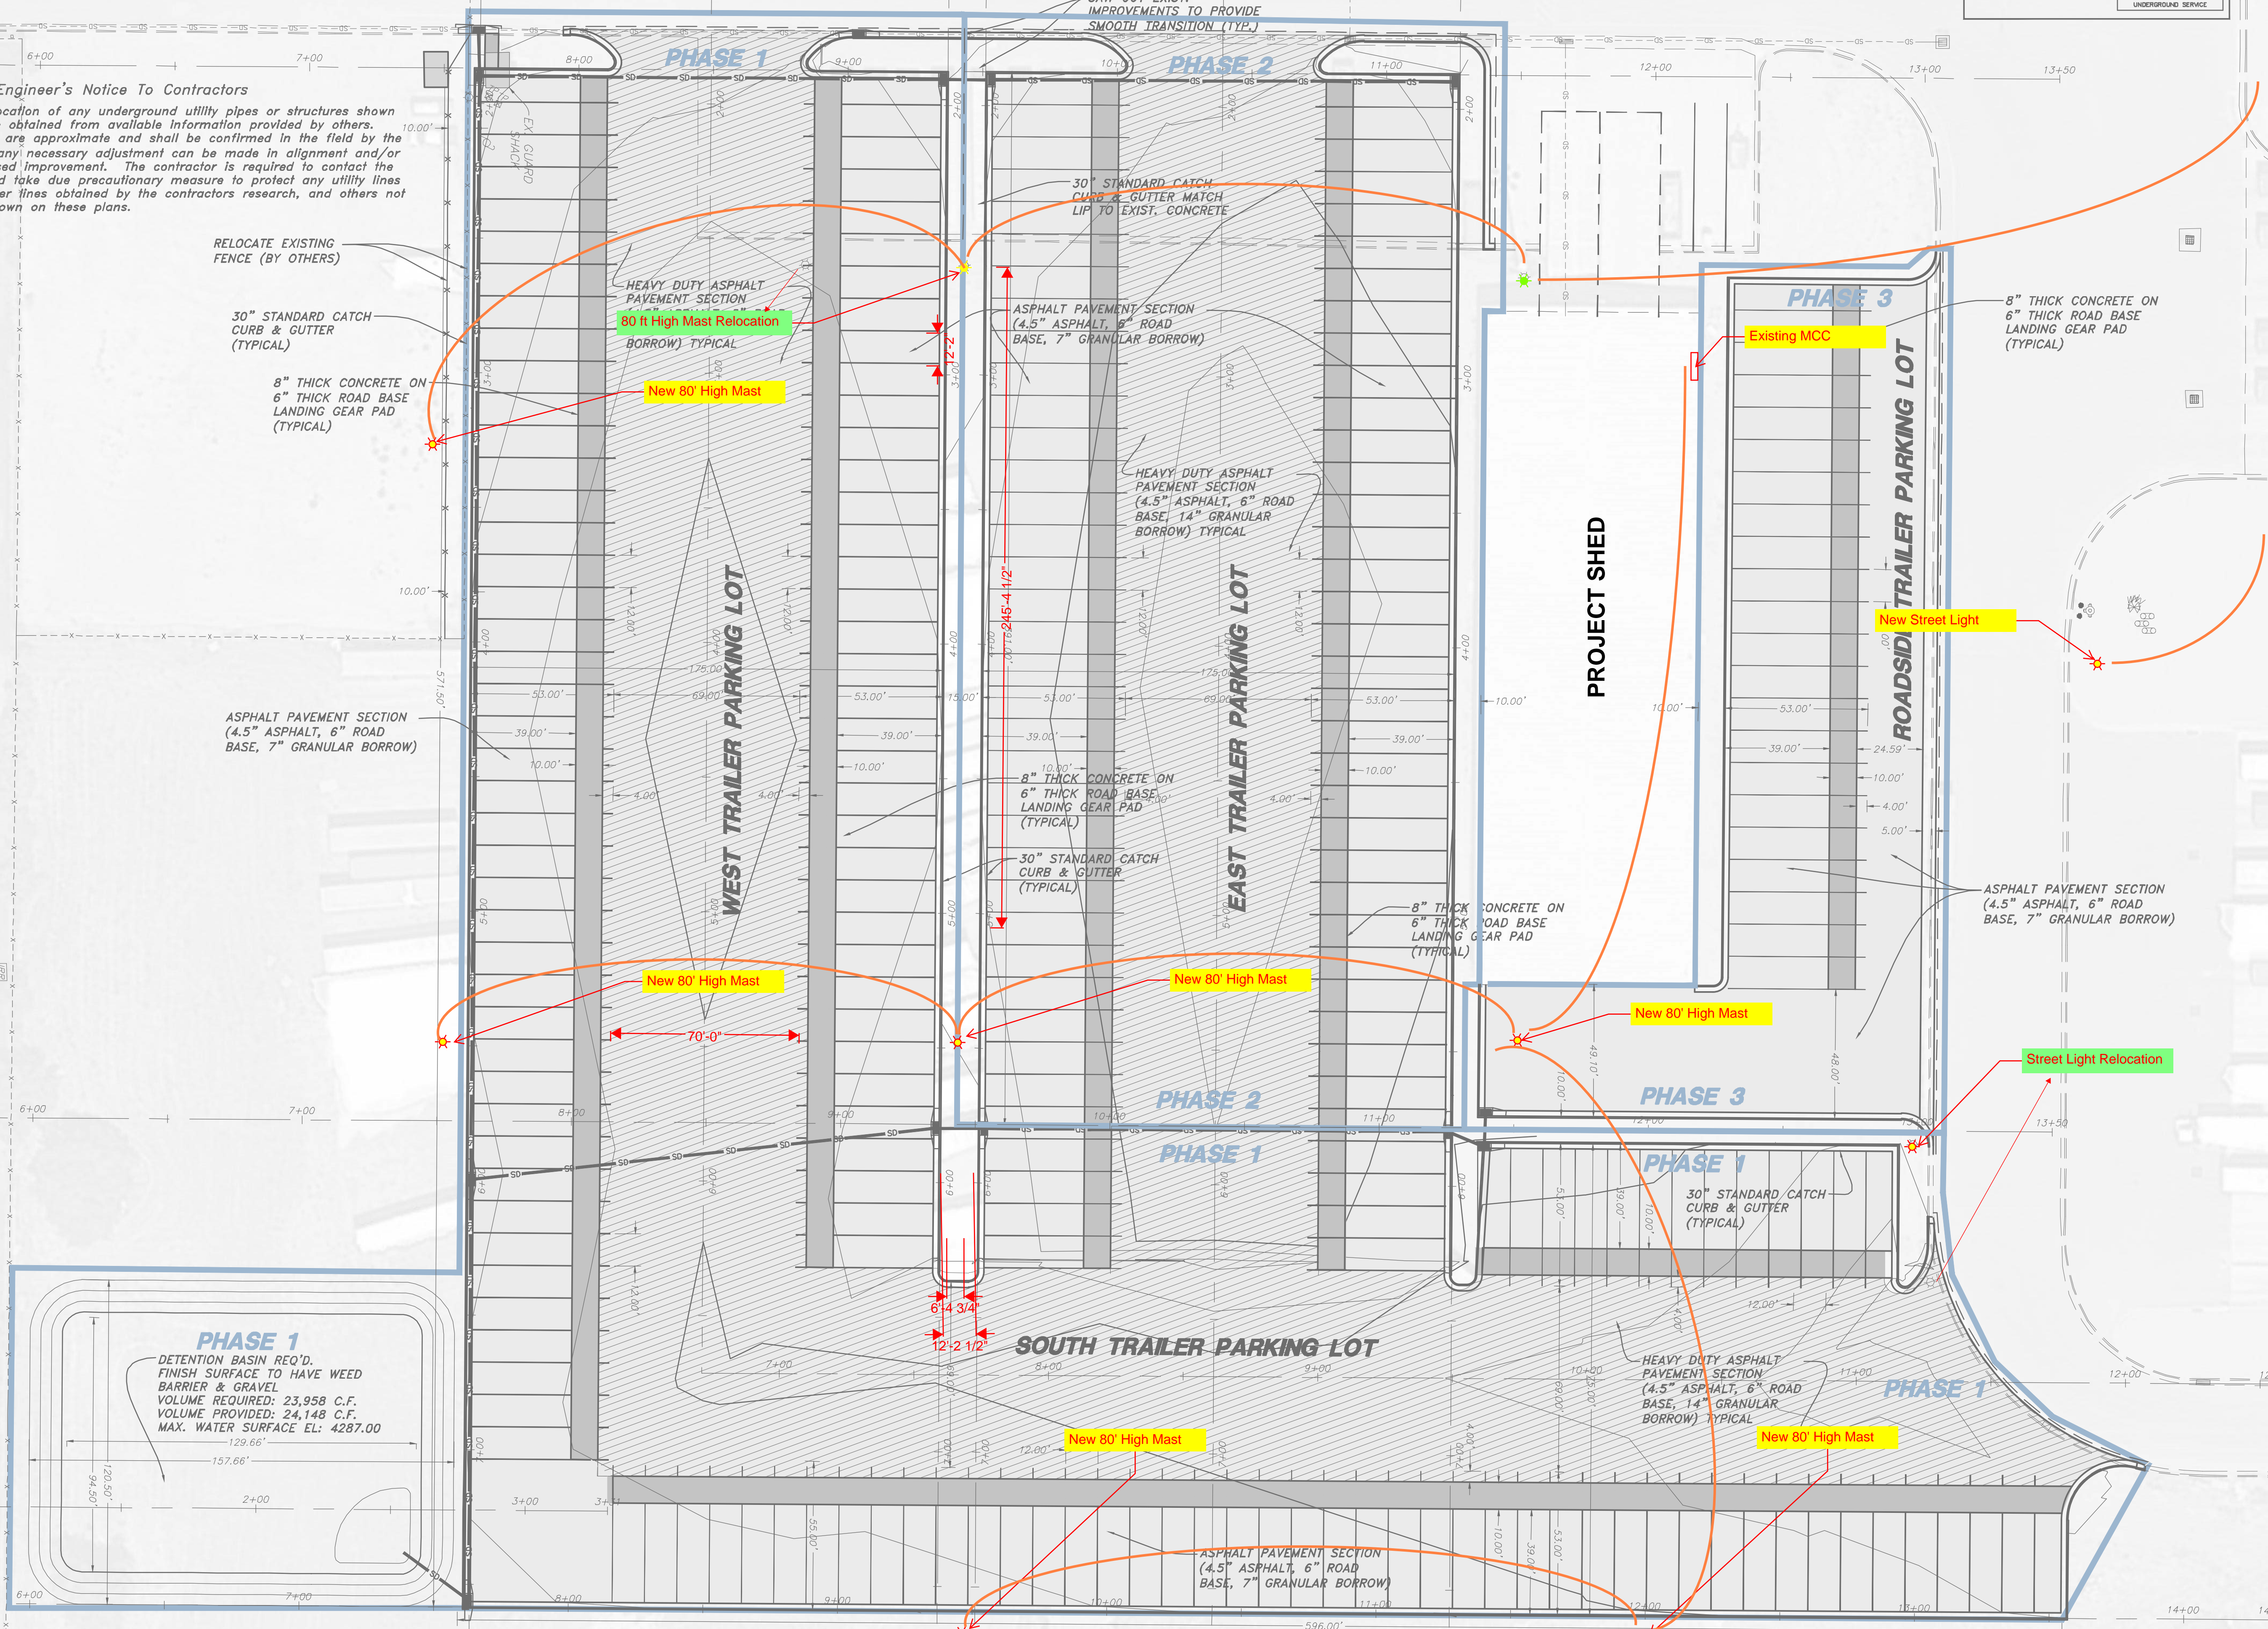

RELOCATE EXISTING FENCE (BY OTHERS)

30" STANDARD CATCH CURB & GUTTER (TYPICAL)

8" THICK CONCRETE ON 6" THICK ROAD BASE LANDING GEAR PAD (TYPICAL)

HEAVY DUTY ASPHALT PAVEMENT SECTION (4.5" ASPHALT, 6" ROAD BASE, 7" GRANULAR BORROW) TYPICAL

80 ft High Mast Relocation

New 80' High Mast

ASPHALT PAVEMENT SECTION (4.5" ASPHALT, 6" ROAD BASE, 7" GRANULAR BORROW)

SAW CUT EXIST. IMPROVEMENTS TO PROVIDE SMOOTH TRANSITION (TYP.)

30" STANDARD CATCH CURB & GUTTER MATCH LIP TO EXIST. CONCRETE

HEAVY DUTY ASPHALT PAVEMENT SECTION (4.5" ASPHALT, 6" ROAD BASE, 14" GRANULAR BORROW) TYPICAL

8" THICK CONCRETE ON 6" THICK ROAD BASE LANDING GEAR PAD (TYPICAL)

30" STANDARD CATCH CURB & GUTTER (TYPICAL)

8" THICK CONCRETE ON 6" THICK ROAD BASE LANDING GEAR PAD (TYPICAL)

8" THICK CONCRETE ON 6" THICK ROAD BASE LANDING GEAR PAD (TYPICAL)

Existing MCC

New Street Light

ASPHALT PAVEMENT SECTION (4.5" ASPHALT, 6" ROAD BASE, 7" GRANULAR BORROW)


New 80' High Mast

New 80' High Mast

New 80' High Mast

Street Light Relocation

PHASE 1
DETENTION BASIN REQ'D.
FINISH SURFACE TO HAVE WEED BARRIER & GRAVEL
VOLUME REQUIRED: 23,958 C.F.
VOLUME PROVIDED: 24,148 C.F.
MAX. WATER SURFACE EL: 4287.00



SCALE: 1" = 30'
Scale In Feet

SHEET NO.	DRAWING PLAN	SOUTHWEST TRAILER LOT	DATE	APP.	K-C NUMBER	ISS	NO	LOC	BY	TITLE	DRAWN	CHECK	DATE	APVD	KIMBERLY-CLARK CORPORATION	C219-E7-99050	D 1