

PROOF PRESENTED BY:



PREPARED FOR:

Planning & Consultation

Design & Fabrication

Installation & Removal

Maintenance & Repair

OFFICE:



746 N. Harrisville Rd.

Ogden, UT 84401

801-823-3100

www.DavisSignsUtah.com

License - Bonded - Insured

OUT TEAM:



SALES:

Bill Thompson

801-628-3479

Bill@davissignsutah.com

DESIGN:

design@davis-signs.com

LOCATION:



1425 W 2675 N

Ogden, UT 84404

CONTACT:



Client Name Here

NOTES:




Customer is responsible for providing a dedicated electrical circuit within 6 feet of each sign location and any desired electrical timing devices.

DRAWING NUMBER

230228-03

FILE PATH:



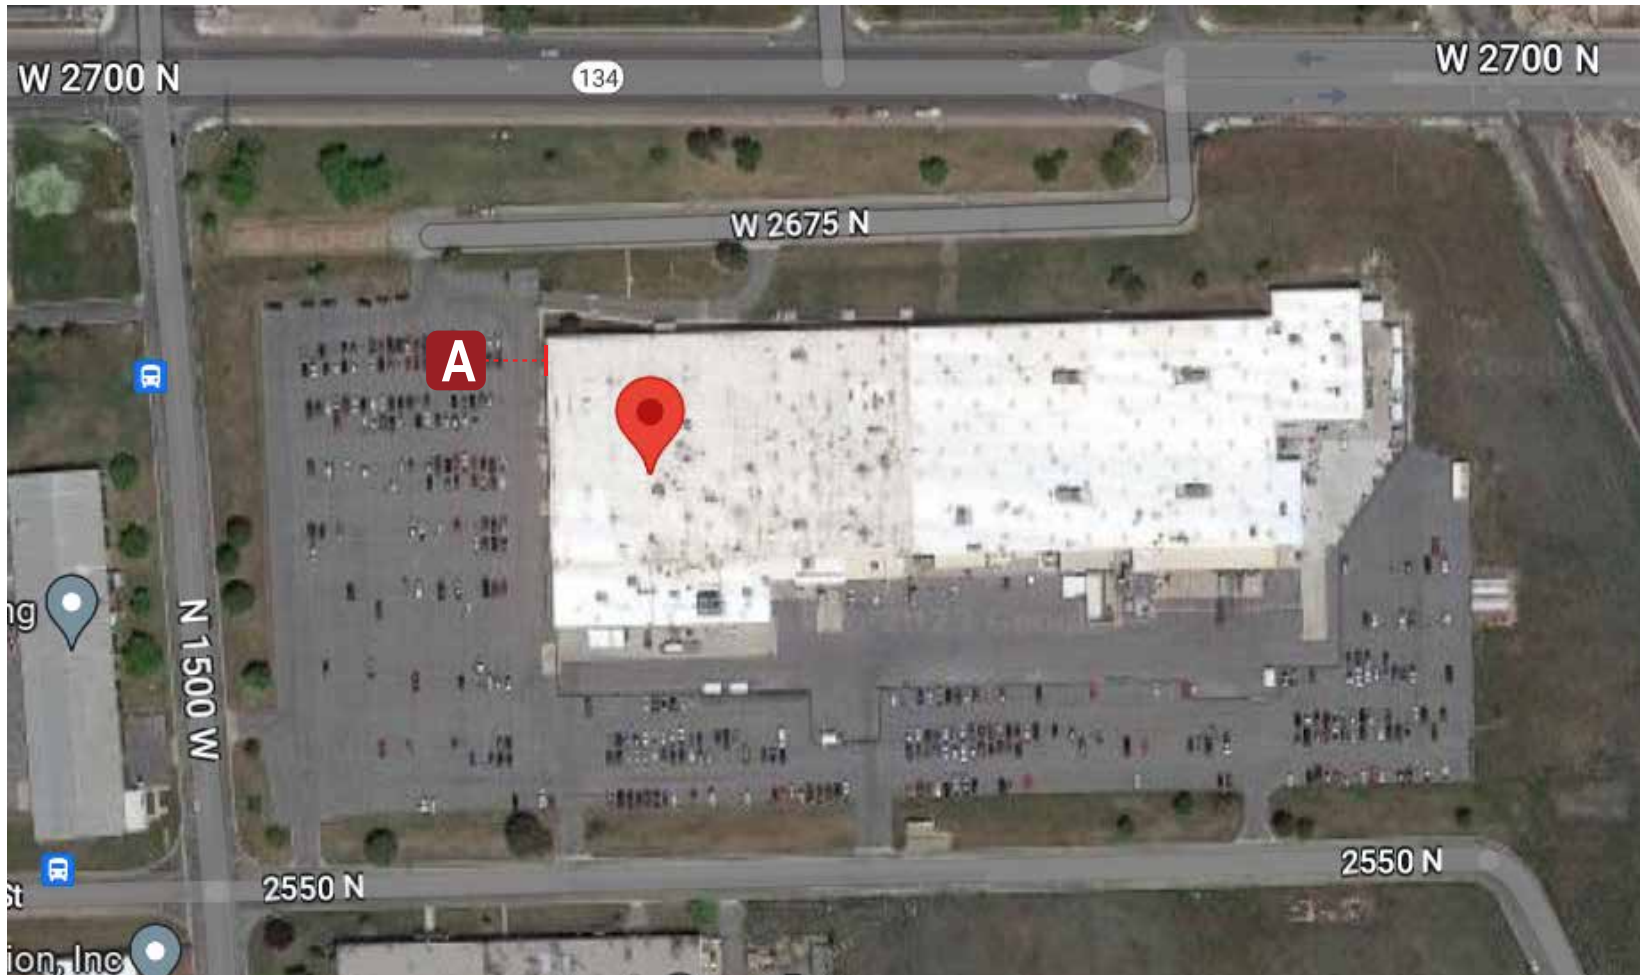

■ CLIENT

Parker Aerospace

■ LOCATION

1425 W 2675 N  
Ogden, UT 84404

■ REVISIONS

- 01 04.03.23
- 02 05.11.23p
- 03 05.12.23P
- 04
- 05
- 06

■ APPROVAL

SIGN HERE

CUSTOMER APPROVAL

SIGN HERE

LANDLORD APPROVAL

■ RECITALS



© Copyright 2021 | All Rights Reserved  
Davis Signs Utah | 801-823-3100  
746 N. Harrisville Rd., Ogden, UT 84404

The designs presented herein are the original work of Davis Signs & Graphics. Great time and resources have gone into design and preparation of these designs. Sharing these designs and documentation with persons outside of your organization without written consent from Davis Signs & Graphics is prohibited and will be considered to be copyright infringement. These designs are for the sole purpose of illustrating a proposal for work by Davis Signs & Graphics.

Licensed, Bonded and Insured



DRAWING NUMBER

230228-03 | 02 OF 04





■ CLIENT

Parker Aerospace

■ LOCATION

1425 W 2675 N  
Ogden, UT 84404

■ REVISIONS

- 01 04.03.23
- 02 05.11.23p
- 03 05.12.23P
- 04
- 05
- 06

■ APPROVAL

SIGN HERE

CUSTOMER APPROVAL

SIGN HERE

LANDLORD APPROVAL

■ RECITALS



© Copyright 2021 | All Rights Reserved  
Davis Signs Utah | 801-823-3100  
746 N. Harrisville Rd., Ogden, UT 84404

The designs presented herein are the original work of Davis Signs & Graphics. Great time and resources have gone into design and preparation of these designs. Sharing these designs and documentation with persons outside of your organization without written consent from Davis Signs & Graphics is prohibited and will be considered to be copyright infringement. These designs are for the sole purpose of illustrating a proposal for work by Davis Signs & Graphics.

Licensed, Bonded and Insured



DRAWING NUMBER

230228-03 | 03 OF 04

PROPOSED SIGNAGE

FRONTAGE: XX sf  
SIGN HEIGHT: 28'- 0"  
SQUARE FOOTAGE: 67.5 sf

**A** | COMBO ILLUMINATED PAN-CHANNEL DISPLAY | Scale: 1/2" = 1'-0"

**NOTE:**  
Fabricate and install ONE (1) Set of combo illuminated PC logo/letters as illustrated.

**FACE:** 1/8" White Acrylic  
**BACKS:** .063 Aluminum  
**ILLUMINATION:** LEDs on separate controller face or back  
**INSTALL:** 1" Standoff

☺ | FACE

- 1/8" aluminum
- 1/8" White plex


⦿ | BACK


- Clear Lexan
- Aluminum baffle

☀ | ILLUMINATION


- Hanley White LEDs

⚙ | COMBINATION CROSS SECTION DETAILS

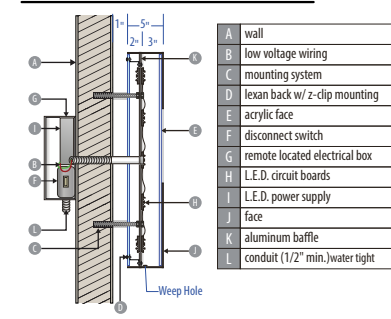

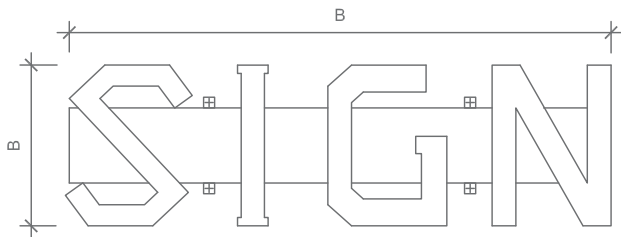

ELEVATION LETTERS ON RACEWAY

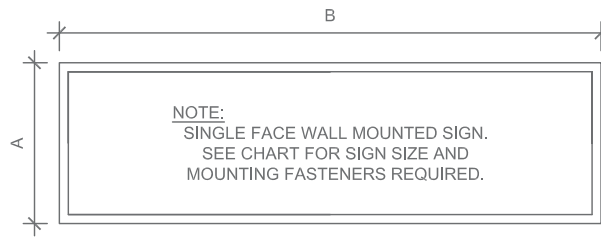

SQUARE FOOT AREA = AxB

SQUARE FOOTAGE SQ. FT= AXB	WALL SIGN							
	LAG SCREWS INTO WOOD STUDS		HILTI HIT HY 200 + HAS INTO CONCRETE		HILTI KWIK BOLT TZ INTO CONCRETE		HILTI KB3 INTO FULLY GROUTED CMU	
	NUMBER OF BOLTS & DIAMETER	EMBEDMENT	NUMBER OF BOLTS & DIAMETER	EMBEDMENT	NUMBER OF BOLTS & DIAMETER	EMBEDMENT	NUMBER OF BOLTS & DIAMETER	EMBEDMENT
UP TO 24	7-1/4"	1"	7-3/8"	2 5/8"	7-3/8"	2"	7-1/4"	1 1/8"
25 TO 49	9-1/4"	1 1/2"	9-3/8"	2 5/8"	9-3/8"	2"	8-3/8"	1 1/8"
50 TO 74	11-3/8"	1 1/2"	11-3/8"	2 5/8"	11-3/8"	2"	10-3/8"	1 1/8"
75 TO 99	10-1/2"	2"	10-3/8"	2 5/8"	10-3/8"	2"	13-3/8"	1 1/8"
100 TO 124	10-1/2"	2"	10-3/8"	2 5/8"	10-3/8"	2"	16-3/8"	1 1/8"
125 TO 149	12-1/2"	2"	12-3/8"	2 5/8"	12-3/8"	2"	19-3/8"	1 1/8"
150 TO 174	13-1/2"	2"	13-3/8"	2 5/8"	13-3/8"	2"	22-3/8"	1 1/8"
175 TO 199	15-1/2"	2"	15-3/8"	2 5/8"	15-3/8"	2"	25-3/8"	1 1/8"
200 TO 224	17-1/2"	2"	17-3/8"	2 5/8"	17-3/8"	2"	30-3/8"	1 1/8"

NOTES:

1. TYPE OF FASTENER WILL VARY WITH EACH MOUNTING SURFACE.
2. SOME APPLICATIONS MAY REQUIRE A STRUCTURAL BACKUP SUCH AS ANGLE IRON OR PLATES.
3. MAXIMUM HEIGHT ABOVE FINISHED GRADE IS 60 FEET.
4. FASTENERS SHALL BE EQUALLY SPACED WITHIN THE SIGN.
5. SIGNS OVER 224 SQUARE FEET REQUIRE SPECIAL ENGINEERING.

GENERAL NOTES:

1. VALUES BASED ON DOUGLAS FIR WOOD OR BETTER.
2. 8" MINIMUM DISTANCE FROM EDGE OF WALL.
3. MASONRY SHALL BE REINFORCED CONCRETE MASONRY UNITS.
4. THE CMU BLOCK SHALL CONFORM TO ASTM C90 WITH STRENGTH f<sub>m</sub>= 1500 PSI
5. HILTI KB3 ANCHORS MUST BE INSTALLED A MINIMUM OF 1 3/8" INCHES FROM ANY VERTICAL MORTAR JOINT
6. ANCHOR LOCATIONS ARE LIMITED TO ONE PER MASONRY CELL WITH A MINIMUM SPACING OF 8" ON CENTER
7. SHELLS SHALL BE FILLED SOLID WITH GROUT
8. CONCRETE 2500 PSI MIN.
9. ROUND OR HEX HEAD ANCHOR ACCEPTABLE



**SULLAWAY ENGINEERING**  
 10815 RANCHO BERNARDO RD., SUITE 260  
 SAN DIEGO, CA 92198  
 PROJECTMANAGER@SULLAWAYENG.COM  
 (858)312-5150  
 www.sullawayeng.com

SIGN DESIGN  
 ENGINEERING  
 STANDARDS;  
 FOR THE STATE  
 OF UTAH

PROJECT NUMBER:  
 19359

DATE: 11-6-2018

SCALE: NO SCALE


DRAWN BY: MFS

DESIGNED BY: MFS

REVISIONS:  
 NO. DATE



THIS ELECTRONIC  
 SIGNATURE HAS BEEN  
 AUTHORIZED BY ME



V = 115 MPH SHEET TITLE: WALL /CHANNEL LETTER SIGN ATTACHMENTS SHEET: S19