

- KEYNOTES:**
- 1 NEW REINFORCED CONCRETE FOUNDATION WALL. REFER TO DETAIL 1 - SHEET 101B.
 - 2 NEW CONT. CONCRETE FOOTING. REFER TO DETAIL 5 - SHEET 101B.
 - 3 NEW #4 REBAR @ 16" O.C. DOWEL & EPOXY INTO EXISTING CONCRETE FOUNDATION WALL.
 - 4 EXISTING 8" CONCRETE FOUNDATION WALL & CONCRETE FOOTING.
 - 5 NEW STONE VENEER ON NEW CONCRETE FOUNDATION WALL.
 - 6 BOTTOM OF NEW CONCRETE FOOTING TO BE 78" BELOW FROST GRADE.
 - 7 BOTTOM OF NEW CONCRETE FOOTING TO MATCH LEVEL OF EXISTING FOOTING.
 - 8 LOCATION OF NEW ELEVATOR 12" THICK CONCRETE SLAB, W/ (5) #5 REBAR EA WAY BOT. DRILL AND EPOXY REBAR INTO EXISTING CONCRETE FOUNDATION WALLS.
 - 9 LOCATION OF NEW CONCRETE STEPS UP TO FINISH GRADE.
 - 10 TOP OF CONCRETE WALL TO BE +4'-0" ABOVE TOP STEP OF CONCRETE STEPS.
 - 11 TOP OF CONCRETE WALL TO BE +3'-0" BELOW THE BOTTOM OF EXISTING CLU-LAM WOOD BEAM - SEE ELEVATION 3/A101B.
 - 12 NEW (3) #4 REBAR DOWEL & EPOXY INTO EXISTING CONCRETE FOOTING.
 - 13 TOP OF NEW CONCRETE WALL TO MATCH LEVEL OF EXISTING CONCRETE WALL.
 - 14 ELEVATOR 8" WIDE x 3'-6" DEEP CONCRETE GRADE BEAM - RE: DETAIL ON SHEET 6/A101B.

1 LOWER FLOOR PLAN CONCRETE RETAINING WALLS
 A101A SCALE: 1/4" = 1'-0"




ADDENDUM #1
 ADDENDUM #2

Date:
 11 • 11 • 2020

moonlight drafting, llc
 COMPUTERIZED DRAFTING SERVICE
 (801) 651-7025
 175 North 600 East #40
 St. George, Utah 84770
 E-Mail: pm@moonlightdrafting.net

PROJECT # 2015-05
 DATE/REVISION: 11/11/2020

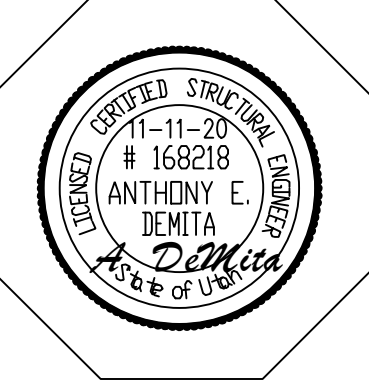

A New Cabin For:
 Mr. and Mrs. Dave Orchard
 Parcel #20-015-0010
 5593 E. East Highway 39
 Ogden City, Utah 84401

A
 101A