





620 24TH STREET OGDEN, UT 84401 BP-ARCHITECTS.NET P 801.394.3033 F 801.394.9064

SHEET INDEX:

G1.1 COVER SHEET / GENERAL INFORMATION

SD1.1 SITE PLAN

A1.1 FLOOR PLANS

metal hinged door and frame

asbestos abatement on existing

overhead door

A2.1 ELEVATIONS & SECTIONS

PROJECT TEAM:

OWNER:

CORPORATION OF THE PRESIDING BISHOP OF THE CHURCH OF JESUS CHRIST OF LATTER-DAY SAINTS A UTAH CORPORATION SOLE 50 EAST NORTH TEMPLE STREET SALT LAKE CITY, UTAH 84150

ARCHITECT:


BOTT PANTONE ARCHITECTS 620 24TH STREET OGDEN, UTAH 84401 801.394.3033


Part of the materials associated with the construction of the storage building are to be furnished by the contractor from a building package (Cimarron garage style) fabricated by Sutherlands (contact: Rodd Robins - 1-800-315-7880). An allowance has been provided in the contract for the purchase of this package. This includes, but is not limited to the following: Item: Furnished by: Erected/installed by: framing/trusses Contractor Owner Contractor Owner roof & building sheathing Contractor Owner roof shingles Contractor Owner Contractor


Owner

Other materials: These items include, but are not limited to the following:				
Item:	Furnished by:	Erected/installed by:		
demolition of site & exist. bldg	Contractor	Contractor		
concrete work	Contractor	Contractor		
dampproofing/vapor retarder	Contractor	Contractor		
electrical work	Contractor	Contractor		
earthwork	Contractor	Contractor		
exterior improvements	Contractor	Contractor		

Contractor

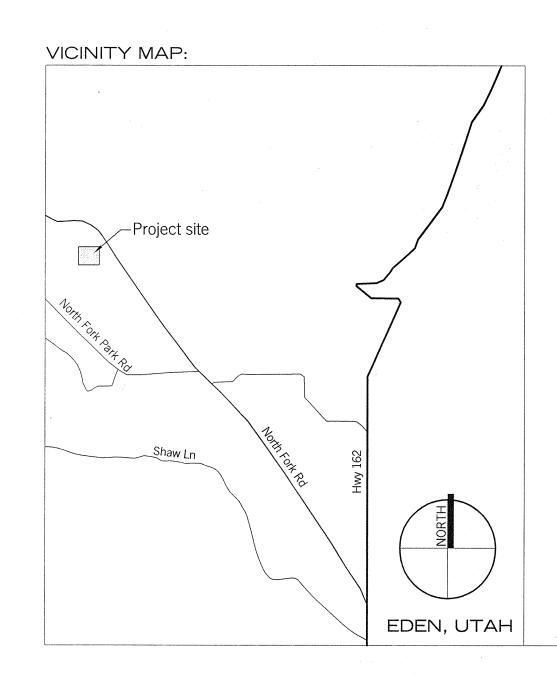


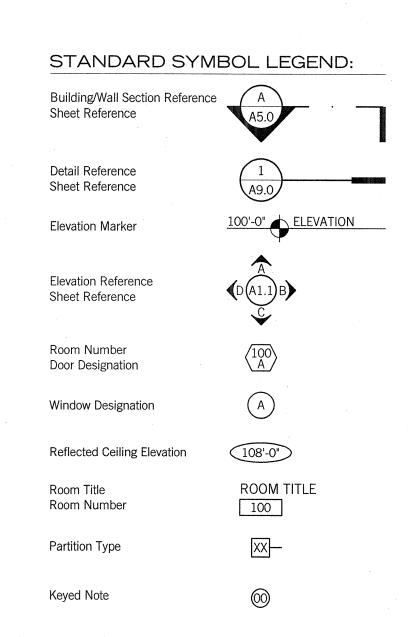

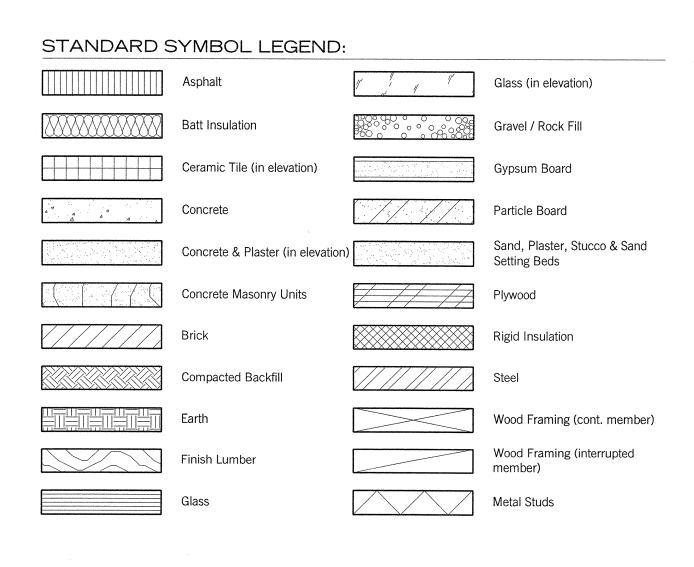

@	At	eb	Expansion Bolt	max	Maximum
Ø	Diameter	eifs	Exterior Insul Fin System	mech	Mechanical
#	Pound or Number	exp jt	Expansion Joint	mtl	Metal
ab	Anchor Bolt	elec	Electrical	mfr	Manufacturer
act	Acoustical Tile	elev	Elevation	min	Minimum
adj	Adjustable	eq	Equal	nic	Not In Contract
aff	Above Finish Floor	equip	Equipment	nts	Not To Scale
alum	Aluminum	ewc	Elec Water Cooler	o.c.	On Center
od "	Board	exist	Existing	pl	Plate
oldg	Building	ext	Exterior	P	Property Line
m	Beam	fd	Floor Drain	plas lam	Plastic Laminate
oot	Bottom	fdn	Foundation	plywd	Plywood
org	Bearing	fecb	Fire Extinguisher Cab	rb	Resilient Base
our	Built Up Roofing	fin fl	Finish(ed) Floor	re:	Reference
cab	Cabinet	ft	Foot or Feet	reinf	Reinforce(d) (ing)
cjt	Control Joint	ftg	Footing	rfg	Roofing
2	Center Line	fur	Furring	rm	Room
:lg	Ceiling	ga	Gauge	sc	Solid Core
:mu	Concrete Masonry Units	galv	Galvanized	sch	Schedule
col	Column	gc	General Contractor	sec	Section
conc	Concrete	gl	Glass	sim	Similar
onst	Construction	gyp bd	Gypsum Board	spec	Specification
const jt	Construction Joint	hc	Hollow Case	sq	Square
cont	Continuous	hdwd	Hardwood	stl	Steel
contr	Contract(or)	hdwr	Hardware	temp gl	Tempered Glass
corr	Corridor	hdrl	Handrail	typ	Typical
et	Ceramic Tile	hm	Hollow Metal	vct	Vinyl Composition Tile
det	Detail	id 	Inside Diameter	w/	With
dim	Dimension	incl	Include(d) (ing)	wd	Wood
nb	Down	insul	Insulation	wdw	Window
dr	Door	int	Interior	w/o	Without
ea	Each	jt	Joint	wsct	Wainscot

COVER SHEET / GENERAL INFORMATION



1/8" = 1'-0" 08.07.13 Project Number: 1233 Property Number: 510-6265

CAMP LIBERTY STORAGE BUILDING 6350 NORTH FORK ROAD EDEN, UTAH

