

(This SWPPP Template is for the **Common Plan** Permit Only, and
does **NOT** address SWPPP requirements found in the CGP.)

Common Plan SWPPP for Parkinson Residential Home

2642 S 4850 W

Taylor, UT 84401

Kevin Parkinson

4891 W 3625 S

West Haven, UT 84401

Keeneye Construction

4672 Ranch Blvd.

Mountain Green, UT 84050

Date 7/23/2019

07/23/2019



1. Project Information

Project Name: Parkinson Residential Home

Address: 2642 S 4850 W

City: Taylor

State: UT

Zip: 84401

Latitude: 41.290833

Longitude: 112.012222

UPDES Permit Tracking Number: UTRH95113

Owner: Kevin Parkinson

Contact Person: Kevin Parkinson or Marsha Stokes

Address: 4891 West 3625 South

City: West Haven

State: UT

Zip: 84401

Telephone Number: 801-920-9117 or 801-920-0552

Email Address: marshaestokes@gmail.com

General Contractor: Keeneye Construction

Contact Person: Douglas Stokes

Address: 4672 Ranch Blvd

City: Mountain Green

State: UT

Zip: 84050

Telephone Number: 801-941-9241

Email Address: jaemarinc@gmail.com

Answering "no" to the two questions below means the project is not eligible for this permit.

Is the project in Indian Country?

Yes ☐

No ☒

Is the project a residential building on a single lot and disturbing one acre or less?

Yes ☒

No ☐

2. Pollution Sources/Best Management Practices

Answer yes or no whether the following features are located at your site. If yes, select the BMP(s) that will be used to protect each feature. If no, continue to the next question. Attach necessary illustrated details for proper installation in Appendix G, and show locations of all controls on Site Map in Appendix A.

- 2.1 Is there a SWPPP sign on site?** (see permit part 1.10) Yes ☒ Required
The sign must include the UPDES tracking number, the owner or general contractor name, phone number and email, and if the SWPPP is on-line, instructions on how to view it. The size requirement is to be readable from a publicly accessible point.
- 2.2 Will there be construction dewatering on the site?** (see permit part 2.7) Yes ☐ No ☒
BMP(s): ☐ Dewatering of the construction area is needed and a separate dewatering permit has been obtained to treat and discharge water. *Construction Dewatering (if discharged offsite) must be covered by UPDES Permit UTG070000.*
☐ Water from the dewatering of the construction area will be infiltrated on site.
- 2.3 Will there be non-storm water discharges on the site?** (see permit part 1.3) Yes ☐ No ☒
Allowable discharges include: Flushing of drinking water or irrigation water (not including wash or cleaning waters), water used for dust control, spring water or groundwater not exposed to construction activities, water from emergency fire-fighting activities, and water from foot drains not exposed to construction activities. (see permit part 2.4.5 & 2.9).
Please list all anticipated non-storm water discharges: Click here to enter text.

What will you do to manage the non-storm water discharges? *Please list direct discharges, contained non-storm water discharges, and discharges that are treated separately.*

- BMP(s):** ☐ All non-storm water discharges are listed as allowable per permit part 1.3 and discharged
☐ All non-storm water discharges that are not allowed are properly contained (see questions 2.12 and 2.16)
☐ All non-storm water discharges that are contaminated with sediment only (free of chemicals, oils, etc.) will be treated in a sediment basin or equivalent (see permit part 2.8.1).
☐ Other: Click here to enter text.

- 2.4 Is it possible for the total area of disturbance to be phased, minimizing the total exposure of disturbed soil at one time?** (see permit part 2.3.1) Yes ☐ No ☒
If disturbance can be minimized please show the locations on the site map and summarize (here) where disturbances will be delayed for some of the disturbed area: Click here to enter text.

- 2.5 What perimeter controls will be used to prevent sediment from leaving the site?** (permit part 2.1.2 & 2.3)
BMP(s): ☐ Silt Fence ☐ Berms
☐ Vegetative Buffer ☐ Cut-Back-Curb
☐ Staked straw Wattles (Fiber Rolls) ☐ Weighted Wattles
☒ Other: Wash out stations

- 2.6 Are surface waters located within 30 feet of your project's earth disturbances?** Yes ☐ No ☒
Note: *A 30' natural vegetative buffer MUST be maintained by water bodies. If a buffer less than 30' is used, you must demonstrate that the additional controls offer the same protection as a 30' natural vegetative buffer, and select the reason for exemption below. (see permit part 2.3.5)*
BMP(s): ☐ 30' Natural Vegetative Buffer
If less than 30' Natural Vegetative Buffer select additional Controls:
☐ 2 Silt Fence Barrier ☐ 2 Straw Wattle Barriers (Fiber Roll)
☐ Other: Click here to enter text.

- 2.7 Are there critical or sensitive areas (such as preservation of the drip lines around trees, wetlands, buffer zones by water bodies, etc.) located on or adjacent to the site?** (see permit part 2.2) Yes ☐ No ☒
BMP(s): ☐ Separate and isolate with environmental fencing
☐ Other: Click here to enter text.

- 2.8 What track out control will be used to prevent dirt from being tracked on streets as vehicles leave the site?** (see permit part 2.4.1)
BMP(s): ☐ Track Out Pad ☐ Cobble ☐ Gravel
☐ Rumble Strips ☐ Wash Down Pad ☐ Delivery Pad
☐ Restricted Site ☒ Selective Access During Dry Weather (Dry soil) Access
☐ Other: Click here to enter text.

- 2.9 Do you have storm drain inlets on or down gradient of this site?** (see permit part 2.1.3) Yes ☒ No ☐
Protection must address the curb inlet opening (throat) as well as the grate.

Where is/are the nearest downstream inlet(s) and how will you protect them: One is located at the northwest side of the property.

BMP(s): ☒ Rock/Sand-filled Bags ☐ Drop Inlet Bags
☐ Filter Fabric ☐ Gravel or Sand filled Wattles
☐ Proprietary inlet devices
☐ Other: Click here to enter text.

2.10 Will curb ramps be used at the site? (see permit part 2.4.2) Yes ☐ No ☒
If curb ramps are used it must be done with material [not dirt] that will not wash away in storm water.
BMP(s): ☐ Crushed Rock ☐ Wood/Steel Ramps
☐ Other: Click here to enter text.

2.11 Will there be stockpiles or spoil piles on the site? Yes ☐ No ☒
Note: Select "Contained by other BMP" if another BMP on your site will contain runoff from the stockpiles. Materials that can be transported with precipitation must not be placed in the street. (see permit part 2.1.1)
BMP(s): ☐ Surrounded by Silt Fence ☐ Surrounded by Staked Straw Wattles
☐ Covered with Tarp ☐ Temporary – Removed same day
☐ Contained by other BMP. Explain: Click here to enter text.
☐ Other: Click here to enter text.

2.12 Does the project include installation of concrete, masonry, stucco, and paint (water based) work in this project? (see permit part 2.4.5 & 2.9.1) Yes ☒ No ☐
Wash water must be contained, the solids dried, and disposed of at a landfill.
BMP(s): ☐ Lined Depression ☐ Steel Dumpster
☐ Regional Washout (per development)
☒ Other: Wash out stations

2.13 How will solid waste be dealt with on the site? (see permit part 2.4.3)
Light trash in uncovered dumpsters can blow out and scatter with wind and rain may fall on uncovered leachable material in the dumpster and leak out the bottom causing pollutants to escape.
BMP(s): ☐ Bag Lightweight Trash ☐ Leak Proof Dumpsters
☐ Receptacles with Lids ☐ Other: Click here to enter text.

2.14 Will there be a need to dispose of solvents, oil, fuel, etc. liquid waste? (see permit part 2.9) Yes ☐ No ☒
BMP(s): ☐ Contained and Removed from the site ☐ Collected for Reuse
☐ Other: Click here to enter text.

2.15 How will sanitary waste be handled on the site? (see permit part 2.4.4)
BMP(s): ☒ Portable Toilet(s) (must be staked down on dirt surface & 10' from curb)
☐ Onsite or Adjacent Indoor Bathrooms
☐ Portable Toilet Secondary Containment (secured down with straps to heavy weights)
☐ Other: Click here to enter text.

2.16 How will you minimize the discharge of pollutants from spills and leaks? (see permit part 2.8.3)
BMP(s): ☐ Use of drip pans ☒ Offsite fueling, and maintenance
☐ Spill kit ☐ Spill response plan.
☐ Other: Click here to enter text.

2.17 Will there be a need to store construction materials on site? (see permit 2.8.2) Yes ☐ No ☒
Minimize the exposure of materials with a pollution risk (certain building and landscaping materials, fertilizers, pesticides, herbicides, detergents).

BMP(s): ☐ Covering Erodible or Liquid Materials ☐ Secondary Containment
☐ Strategic Storage and Staging ☐ Stored off-site
☐ Enclose them in a weather proof shed.
☐ Other: Click here to enter text.

2.18 Does your site have steep slopes (greater than 70%)? (see permit part 2.3.2) Yes ☐ No ☒

BMP(s): ☐ Erosion Control Blanket ☐ Avoid Disturbance on slope
☐ Seeding ☐ Hydroseed
☐ Mulch ☐ Tackifiers
☐ Other: Click here to enter text.

2.19 Are there site conditions that cause storm water flows with highly erosive velocities? (see permit parts 2.3.3 and 2.3.4) Yes ☐ No ☒

Flows must be controlled to minimize sediment transport.

BMP(s): ☐ Gravel Check Dam ☐ Straw Wattles (Fiber Rolls) Check Dam
☐ Divert Flows around the Site ☐ Armored channel (riprap, geotextile, other)
☐ Other: Click here to enter text.

2.20 How will you reduce storm water volume to minimize sediment transport, channel and stream bank erosion? (see permit parts 2.3.4 and 2.3.3)

BMP(s): ☐ Utilize basin, depression storage of storm water, cut back curb, or other to hold and infiltrate.
☒ Prevent heavy equipment (as much as possible) from compacting soil so storm water will infiltrate easier.
☐ Rip soil after heavy equipment has caused compaction.
☐ Other: Click here to enter text.

2.21 Is there a need for dust control on the site (regulatory or for practical reasons)? Yes ☒ No ☐

BMP(s): ☒ Wetting with Water ☐ Cover dirt piles with a tarp
☐ Use Mag chloride, Calcium Chloride or Lignan Sulfonate
☐ Stabilize surface with mulch, gravel or other surface cover
☐ Other: Click here to enter text.

2.22 Will there be disturbed areas on the site that will need to be temporarily stabilized before the project is completed? (see permit part 2.6) Yes ☐ No ☒

Places that are disturbed and then left for over 14 days with no activity, must be temporarily or permanently stabilized.

BMP(s): ☐ Bark or other mulch ☐ Hydro-mulch ☐ Seeding
☐ Tackifier ☐ Staked netting with straw mulch
☐ Other: Click here to enter text.

2.23 Will the house be sold without any landscaping? Yes ☒ No ☒

If so, how will you leave the site for the new home owner so sediment will be contained on site until the home owner completes landscaping? *(the permit can be terminated when the owner occupies the house even though the site is not stabilized).*

BMP(s):

☐ Mulching/Hydro-mulching	☐ Swales	☐ Silt Fence
☐ Wattles	☐ Cut-Back-Curb	☐ Seeding
☐ Vegetated Buffer	☐ Grade Front-Yard Lower than Sidewalk	
☒ Other: Will be graded and flat prepared for landscaping		

3. Sequence of Construction Activity

Type of Construction Activity	Approximate Date Range
Start/End of the Project	7/29/2019
Excavation activities	7/29/2019 – 08/03/2019
Foundation/Footings	8/5/2019- 09/09/2019
Backfill	09/10/2019-09/13/2019
Erection of Building	9/16/2019-10/31/2019
Utility Lines installed (you may need to separate this into Plumbing lines, electrical lines, gas lines, water lines, Internet lines, etc.)	All will be done during the excavation and during the footings and foundations.
Insert more rows for any stage that should be included	
Landscaping (if the house is sold or occupied by owner with landscaping, if not landscaping should not be included)	Landscaping will be done by owner

4. Site Map

On a blank page (or include a page from the architectural drawings that show site layout and dimensions), please draw a map (and place this map in Appendix A) showing the layout of the site including locations of:

1. boundaries of project/property
2. boundaries of disturbance (including areas outside of property boundaries)
3. show slopes on site (if there are steep areas show steep areas)
4. location of structures/facilities
5. locations of :
 - a. stockpiles for soils and materials
 - b. construction supplies
 - c. portable toilets

- d. garbage/trash containers
- e. egress points/track out pads
- f. concrete washout pits or containers
6. water bodies, wetlands, natural vegetative buffers
7. placement of all BMPs, perimeter, erosion control, sediment control, inlet protection, etc.
8. storm water inlets and storm water discharge points (where storm water drains off the site)
9. areas that will be temporarily or permanently stabilized on the site
10. areas where disturbances will be delayed to minimize total exposed surface at one time.

5. Potential Sources of Pollutants

Potential sources of sediment to storm water runoff:

- Clearing and grubbing operations
- Grading and site excavation operations
- Vehicle tracking
- Topsoil stripping and stockpiling
- Landscaping operations

Potential pollutants and sources, other than sediment, to storm water runoff:

- Combined Staging Area—small fueling activities, minor equipment maintenance, sanitary facilities, and hazardous waste storage.
- Materials Storage Area—general building materials, solvents, adhesives, paving materials, paints, aggregates, trash, and so on.
- Construction Activity—paving, curb/gutter installation, concrete pouring/mortar/stucco, and building construction
- Concrete Washout Area

For all potential construction site pollutants, see Table 2 below.

Table 2. Potential construction site pollutants. Circle/highlight all that applies to your site and in the last column identify pollution prevention measures to minimize their discharge.

Material/Chemical	Storm Water Pollutants	Common Location*	Pollution Prevention Methods
Pesticides (insecticides, fungicides, herbicides, rodenticide)	Chlorinated hydrocarbons, organophosphates, carbamates, arsenic	Herbicides used for noxious weed control	
Fertilizer	Nitrogen, phosphorous	Newly seeded areas	
Plaster	Calcium sulphate, calcium carbonate, sulfuric acid	Building construction	Make sure subcontractors are prepared and handling material appropriately and provide applicable MSDS sheets.

Storm Water Pollution Prevention Plan Template (SWPPP)
Common Plan Permit

Material/Chemical	Storm Water Pollutants	Common Location*	Pollution Prevention Methods
Cleaning solvents	Perchloroethylene, methylene chloride, trichloroethylene, petroleum distillates	No equipment cleaning allowed in project limits	
Asphalt	Oil, petroleum distillates	Streets and roofing	Make sure subcontractors are prepared and handling material appropriately and provide applicable MSDS sheets.
Concrete	Limestone, sand, pH, chromium	Curb and gutter, building construction	Make sure subcontractors are prepared and handling material appropriately and provide applicable MSDS sheets.
Glue, adhesives	Polymers, epoxies	Building construction	Make sure subcontractors are prepared and handling material appropriately and provide applicable MSDS sheets.
Paints	Metal oxides, Stoddard solvent, talc, calcium carbonate, arsenic	Building construction	Make sure subcontractors are prepared and handling material appropriately and provide applicable MSDS sheets.
Curing compounds	Naphtha	Curb and gutter	
Wood preservatives	Stoddard solvent, petroleum distillates, arsenic, copper, chromium	Timber pads and building construction	
Hydraulic oil/fluids	Mineral oil	Leaks or broken hoses from equipment	
Gasoline	Benzene, ethyl benzene, toluene, xylene, MTBE	Secondary containment/staging area	
Diesel Fuel	Petroleum distillate, oil & grease, naphthalene, xylenes	Secondary containment/staging area	
Kerosene	Coal oil, petroleum distillates	Secondary containment/staging area	

Material/Chemical	Storm Water Pollutants	Common Location*	Pollution Prevention Methods
Antifreeze/coolant	Ethylene glycol, propylene glycol, heavy metals (copper, lead, zinc)	Leaks or broken hoses from equipment	
Sanitary toilets	Bacteria, parasites, and viruses	Staging area	Appropriately secure to ground.

*(Area where material/chemical is used on-site)

6. Spill Prevention and Response Plan

Describe the spill prevention and control plan to include ways to reduce the chance of spills, stop the source of spills, contain and cleanup spills, dispose of materials contaminated by spills, and train personnel responsible for spill prevention and control. Additionally, fill in all **BLUE** fields below.

Spill Plan:

Overall practice of good housekeeping will be implemented on site. This will include minimizing hazardous materials allowed on site. Implement preventative maintenance activities to reduce the potential for release from equipment. Immediately clean up and properly manage all small spills or leaks. Keep work areas and hazardous substance storage areas clean and in good general condition. Make sure employees and subcontractors are trained and able to respond to spills. In the event that a hazardous substance spill or release happens, immediately staff will review OSHA SDS guidelines and follow procedures accordingly.

Any discharges in 24 hours equal to or in excess of the reportable quantities listed in 40 CFR 117, 40 CFR 110, and 40 CFR 302 will be reported to the National Response Center and the Division of Water Quality (DWQ) as soon as practical after knowledge of the spill is known to the permittee. The permittee shall submit within 14 calendar days of knowledge of the release a written description of: the release (including the type and estimate of the amount of material released), the date that such release occurred, the circumstances leading to the release, and measures taken and/or planned to be taken to the Division of Water Quality (DWQ), 288 North 1460 West, P.O. Box 144870, Salt Lake City, Utah 84114-4870. The Storm Water Pollution Prevention Plan must be modified within 14 calendar days of knowledge of the release to provide a description of the release, the circumstances leading to the release, and the date of the release. In addition, the plan must be reviewed to identify measures to prevent the reoccurrence of such releases and to respond to such releases, and the plan must be modified where appropriate.

Agency	Phone Number
National Response Center	(800) 424-8802
Division of Water Quality (DWQ) 24-Hr Reporting	(801) 538-6146; (801) 536-4123
Utah Department of Health Emergency Response	(801) 580-6681
Weber Fire District	(801) 782-3580

Minimum spill quantities requiring reporting:

Material	Media Released To	Reportable Quantity
Engine oil, fuel, hydraulic & brake fluid	Land	25 gallons
Paints, solvents, thinners	Land	100 lbs (13 gallons)
Engine oil, fuel, hydraulic & brake fluid	Water	Visible Sheen
Refrigerant	Air	1 lb
Antifreeze, battery acid, gasoline, engine degreasers	Air, Land, Water	100 lbs (13 gallons)

Emphasis to:

1st Priority: Protect all people (including onsite staff)

2nd Priority: Protect equipment and property

3rd Priority: Protect the environment

1. Make sure the spill area is safe to enter and that it does not pose an immediate threat to health or safety of any person.
2. Check for hazards (flammable material, noxious fumes, cause of spill) – if flammable liquid, turn off engines and nearby electrical equipment. If serious hazards are present leave area and call 911. LARGE SPILLS ARE LIKELY TO PRESENT A HAZARD.
3. Stop the spill source and contain flowing spills immediately with spill kits, dirt or other material that will achieve containment.
4. Call co-workers and supervisor for assistance and to make them aware of the spill and potential dangers
5. If spilled material has entered a storm sewer, regardless of containment; contact the City Storm Water Division.
6. Cleanup all spills (flowing or non-flowing) immediately following containment. Clean up spilled material according to manufacturer specifications, for liquid spills use absorbent materials AND DO NOT FLUSH AREA WITH WATER.
7. Properly dispose of cleaning materials and used absorbent material according to manufacturer specifications.
8. Report the reportable quantity to the Weber Morgan Health Department (801) 399-7100.

Emergency Numbers

Utah Hazmat Response Officer 24 hrs	(801)-538-3745
Weber County Sheriff Department	(801)-778-6600
Weber County Engineering Division	(801)-399-8374

7. SWPPP, Inspections and Corrective Action Reports

Inspection Schedule and Procedures: The permit requires inspections once a week (see permit Part 3). You must list and provide details of your BMPs in Appendix G. Inspection reports require reporting on BMPs and how effective they are (download inspection reports from the DWQ construction storm water website under the Common Plan Permit). You may be required to maintain, modify, remove, or apply/install more or different BMPs to control pollutants on the site. Please number your BMPs in Appendix G and refer to those numbers on your inspection reports and corrective action reports when you inspect or report on them.

Describe the general procedures for correcting problems when they are identified. Include responsible staff and time frames for making corrections:

If we are directed to make any corrections or changes to general procedures we will address them as timely possible. Primary persons responsible will be Doug Stokes with Keeneye construction. Once corrections have been made, documentation of the steps taken will be recorded.

Inspections and Corrective Actions: All inspections and corrective actions must be logged using the "Inspection/Correction Action Log" attached in Appendix E. The log should be filled out completely for each BMP.

8. Training of Sub-Contractors

All sub-contractors, installers of utility connections, and others that perform activities that are affected by permit requirements will be informed about permit requirements that pertain to their scope of work.

Sub-Contractors that have been informed:

Contractor	Date	Topic(s) Covered	Initials of Trainer
Excavator			
Gas utilities			
Plumbing connection			
Electrical connection			
Concrete foundation walls			
Concrete flat work			
Landscaper			
Other: Click here to enter text.			
Other: Click here to enter text.			
Other: Click here to enter text.			
Other: Click here to enter text.			

9. Changes to the SWPPP

All changes to this SWPPP must be redlined, dated, and initialed in the SWPPP document and on the site map.

10. Record Keeping

The following items should be kept at the project site available for inspectors to review:

1. A copy of the Common Plan Permit (Appendix B)
2. The signed and certified NOI form (Appendix C)
3. Inspection reports (Appendix E)

11. Delegation of Authority (if any)

Duly Authorized Representatives or Positions:

Company/Organization: Keeneye Construction

Name: Doug Stokes

Position: Owner

Address: 4672 Ranch Blvd.

City: Mountain Green

Telephone: 801-941-9241

State: UT

Zip: 84401

Fax/Email: Jaemarinc@gmail.com

Owner/General Contractor Signature: 

Date: 8.5.19

Additional Duly Authorized Representatives or Positions:

Company/Organization: Keeneye Construction

Name: Mathue Earl

Position: Owner

Address: 4672 Ranch Blvd

City: Mountain Green

Telephone: 801-845-8009

State: UT

Zip: 84401

Fax/Email: keeneyeconstruction@yahoo.com

Owner/General Contractor Signature: 

Date: 8.5.19

12. Discharge Information

Does your project/site discharge storm water into a Municipal Separate Storm Sewer System (MS4)?

☒ Yes

☐ No

Municipal Storm Drain System receiving the discharge from the construction project: Weber County

Receiving Waters (look up <http://mapserv.utah.gov/surfacewaterquality/> to identify your receiving water body)

Enter the name(s) of the first surface water(s) that receives storm water directly from your site and/or from the MS4 listed above. **Note:** multiple rows provided in the case that your site has more than one point of discharge in which each flows to different surface waters.

1. Click here to enter name of receiving waters.
2. Click here to enter name of receiving waters.
3. Click here to enter name of receiving waters.
4. Click here to enter name of receiving waters.

Impaired Waters (refer to <http://mapserv.utah.gov/surfacewaterquality/> in the left hand column to determine status of receiving water body).

Select any impaired surface water(s) that your site will discharge to, either directly or through the MS4 selected above.

Impaired Surface Water	Is this surface water impaired?	Pollutant(s) causing the impairment	Has a TMDL been completed?	Pollutant(s) for which there is a TMDL
Click here to enter text.	☐ Yes ☐ No	Click here to enter text.	☐ Yes ☐ No	Click here to enter text.
Click here to enter text.	☐ Yes ☐ No	Click here to enter text.	☐ Yes ☐ No	Click here to enter text.

13. Certification and Notification

I, Name of Authorized Construction Operator Representative, certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

X 

Construction Operator

This SWPPP should be signed and certified by the construction operator(s).

SWPPP Appendices

Ensure the following documentation is attached to the SWPPP:

Appendix A: SWPPP Site Maps

Appendix B: Common Plan Permit

Appendix C: Notice of Intent (NOI), and a copy of the NOT form unless you plan to terminate the permit on-line

Appendix D: Daily Site Check Log

Appendix E: Inspection Reports and Corrective Actions

Appendix F: Additional Information (i.e. permits such as local permits, dewatering, stream alteration, wetland, and out of date SWPPP documents, delegation of authority forms, etc.)

Appendix G: BMP Specifications and Details (label BMPs to match the sections identified in this document.)

APPENDIX A: SWPPP Site Maps

[illegible][illegible]


Owner

Marshae and Kevin
SWPPP Plan

Project number	Project Number
Date	Issue Date
Drawn by	Author
Checked by	Checker

61

Scoti	$111.5^{\circ} \pm 1.0^{\circ}$
-------	---------------------------------

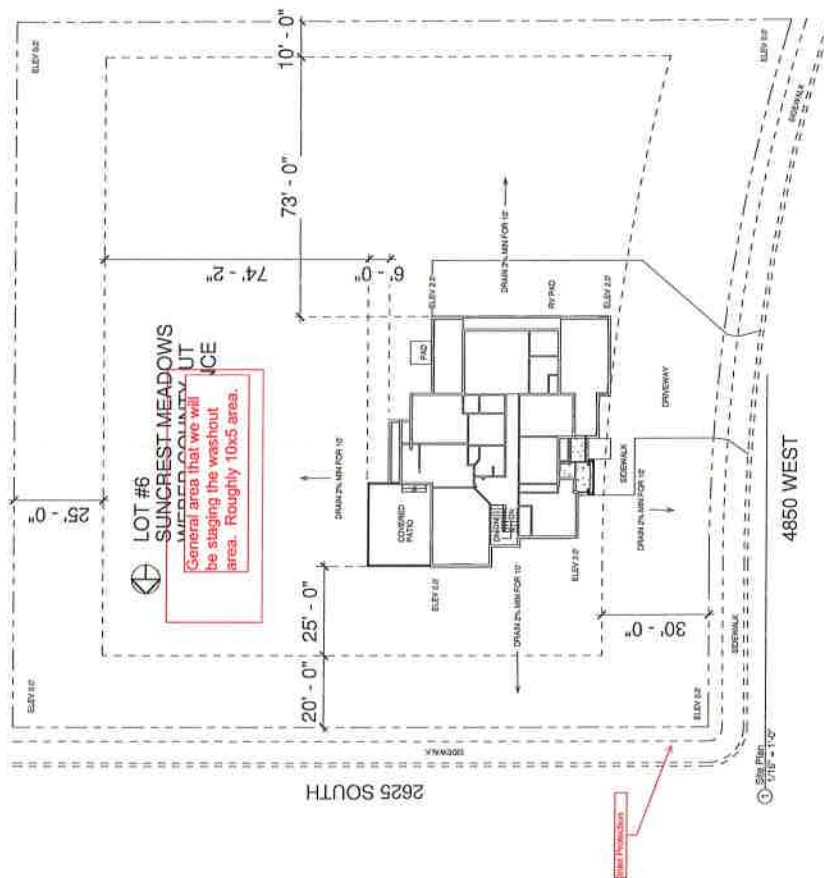

APPENDIX B: Common Plan Permit

Find the permit on <https://deg.utah.gov/legacy/permits/water-quality/utah-pollutant-discharge-elimination-system/docs/2016/02feb/updes-common-plan.pdf>

STATE OF UTAH, DEPARTMENT OF ENVIRONMENTAL QUALITY, DIVISION OF WATER QUALITY

195 North 1950 West, P.O. Box 144870, Salt Lake City, Utah 84114-4870 (801) 536-4300

NOINotice of Intent (NOI) for Storm Water Discharges Associated with Construction Activity Under the UPDES General Permit
UTRH95113
SEE REVERSE FOR INSTRUCTIONS

Submission of this Notice of Intent constitutes notice that the party(s) identified in Section I of this form intends to be authorized by UPDES General Permit No. UTRH95113 issued for storm water discharges associated with construction activity in the State of Utah. Becoming a permittee obligates such discharger to comply with the terms and conditions of the permit. ALL NECESSARY INFORMATION MUST BE PROVIDED ON THIS FORM.

PERMIT PERIOD

Permit Start Date: 07/30/2019 Permit Expiration Date: 07/30/2020

PERMIT TYPEConstruction General Permit (CGP, this permit covers any construction project): ☐Common Plan Permit (this only covers single lot residential construction disturbing less than an acre): ☒Is this NOI seeking continuation for previously expired
permit coverage at the same site? Y ☒ N ☐If yes, what is the number of the previous permit coverage?
Permit No. UTR**I. OWNER INFORMATION**

Owner Name: Kevin Parkinson

Phone: 801-920-0552

Address: 4891 W 3625 S

Status of Owner: PRIVATE

City: WEST HAVEN

State: UT Zip: 84401

Contact Person: Marshae Stokes

Phone: 801-920-0552

GENERAL CONTRACTOR: Keeneye Construction

Phone: 801-941-9241

Address: 4672 Ranch Blvd

Status of General Contractor: PRIVATE

City: MORGAN COUNTY (UNINCORPORATED AREA)

State: UT Zip: 84050

Contact Person: Doug Stokes

Phone: 801-941-9241

II. FACILITY SITE / LOCATION INFORMATION

Name: Parkinson Residential Home

Is the facility located in Indian
Country?

Project No. (if any):

Y ☐ N ☒

Address: 2642 S 4850 W

County: WEBER

City: WEBER COUNTY (UNINCORPORATED AREA)

State: UT Zip: 84401

Latitude: 41.290833

Longitude: 112.012222

Method (check one): ☐ USGS Topo Map, Scale☐ EPA Web site☐ GPS☒ Other**III. SITE INFORMATION**

Municipal Separate Storm Sewer System (MS4) Operator Name: Weber County

Receiving Water Body: Weber River guess

this is known ☐ this is a guess ☒ (see <http://wq.deq.utah.gov/>)

Estimate of distance to the nearest water body? 5.3 miles

ft. ☐ miles. ☒Is the receiving water an impaired or high quality water body (see <http://wq.deq.utah.gov/>)? Yes ☐ No ☒

List the Number of any other UPDES permits at the site:

IV. THIS SECTION IS ONLY FOR PROJECTS INVOLVED IN DEVELOPMENT OF A SUBDIVISION.

List the lots proposed for the development (please add another sheet of paper if there is not enough room to list all lots).

INSTRUCTIONS

Notice Of Intent (NOI) For Permit Coverage Under the UPDES General Permit For Storm Water Discharges From Construction Activities

Who Must File A Notice Of Intent (NOI) Form. State law at UAC R317-8-3.9 prohibits point source discharges of storm water from construction activities to a water body(ies) of the State without a Utah Pollutant Discharge Elimination System (UPDES) permit. The owner and the general contractor of a construction activity that has such a storm water discharge must submit a NOI to obtain coverage under the UPDES Storm Water General Permit. If you have questions about whether you need a permit under the UPDES Storm Water program, or if you need information as to whether a particular program is administered by EPA or a state agency, contact the storm water coordinator at (801) 536-4300.

Where To File NOI Form The preferred method of submitting an NOI to apply for the construction general storm water permit (CGP) is electronically on-line at <http://www.waterquality.utah.gov/UPDES/stormwatercon.htm>. The fee can be submitted on line also. If on-line is not an option for you send a paper form of the NOI to the following address:

Department of Environmental Quality
Division of Water Quality
P.O. Box 144870
Salt Lake City, UT 84114-4870

Beginning of Coverage CGP coverages are issued immediately after submitting an NOI with the permit fee. The permittee should be aware that though you may not have a permit in hand, if you have submitted a completed NOI with the permit fee you are covered by the conditions in the permit and will be expected to comply with permit conditions. You can print a copy of the CGP from the DWQ web site.

Permit Fees. The permit fee is \$150.00 per year. The fee is paid by Visa/Master Card on-line when an NOI is filed (by check if submitted with a paper NOI). If the project continues for more than one year the fee must be submitted again in a renewal process on-line. CGP coverage will not be issued until the fee is paid.

Length of Coverage: CGP coverage starts the day that the NOI and fee is received at DWQ and expires a year from issuance. All CGP coverages must be renewed within 60-days after the yearly expiration date, or be terminated with a notice of termination (NOT) before the expiration date. To terminate the permit the site must meet the permit conditions for final stabilization (see permit definitions), or must continue under a different permit holder. In most cases the DWQ or municipality of jurisdiction will perform a final inspection when a CGP coverage submits an NOT. If the site passes the final inspection the permit is terminated.

The Storm Water General Permit for Construction Activities UTRC00000 will expire on June 30, 2019 – UTRH00000 expires on September 30, 2020. The Clean Water Act requires that all UPDES permits be renewed every 5 years. If a project extends beyond the expiration date of the Permit it must renew the permit and continue coverage under the renewed permit that will subsequently be developed to continue the same or similar permit coverage for construction activity.

SECTION I - FACILITY OPERATOR INFORMATION Supply the legal name(s) of the person(s), firm(s), public organization(s), or any other entity(ies) that qualifies as the owner of the project (see permit definitions). Do the same for the general contractor that conducts the construction operation at the facility or site to be permitted. The owner and the general contractor of the project may be the same.

Enter the complete address and telephone number of the owner and general contractor and a contact person and number for each. Enter the appropriate letter to indicate the legal status of the operator of the facility.

F = Federal M = Public (other than Fed or State) S = State P = Private

SECTION II - FACILITY/SITE LOCATION INFORMATION Enter the facility name or legal name and project number (if any) of the site and complete street address, including city, state and ZIP code. The latitude and longitude of the facility must be included to the approximate centroid of the site, and the method of how the Lat/Long was obtained (USGS maps, GPS, Internet Map sites [such as Google Earth], or other).

Indicate whether the facility is located in Indian Country. If the facility is located in Indian Country, do not complete this NOI, instead submit an application for coverage under a storm water permit to EPA Region VIII except for facilities on the Navajo Reservation or on the Goshute Reservation which should submit an application to EPA Region IX.

SECTION III - SITE ACTIVITY INFORMATION If the storm water discharges to a municipal separate storm sewer system (MS4), enter the name of

the operator of the MS4 (e.g., the name of the City or County of jurisdiction) and the receiving water of the discharge from the MS4 if it is known (if it is not known look it up at <http://wq.deq.utah.gov>). (An MS4 is defined as a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains) that is owned or operated by a state, city, town, county, district, association or other public body which is designed or used for collecting or conveying storm water).

For Impaired Waters: Go to <http://wq.deq.utah.gov> and identify the water body that will receive the storm water discharge from the permitted site, on the map provided at the web site (zoom in for easier resolution). On the left hand side of the page you will see “2010 Assessment” or “2013 Assessment” depending on the year you refer to the web site (the assessment is done every 3 years). The 20XX Assessment will indicate if the water is impaired. If there is nothing after 20XX Assessment or the narrative after does not include the word “impaired”, your receiving water is not impaired.

For High Quality Waters: On the web page referred to in the paragraph above on the left hand side of the page you will see “Anti-Degradation Category”. Under Anti-Degradation Category you will see the category of the water body. Only categories 1 and 2 are high quality water bodies. Some waters may be both categories 1 and 3. If your water body is both category 1 and 3 it means the headwaters of your water body is within Forest Service boundaries, and because it is within Forest Service boundaries it is category 1. If your project is within Forest Service boundaries then your water body is category 1 and it is “high quality”. If your project is not within Forest Service boundaries then your water body is category 3 and is not “high quality”. Again, category 1 waters are high quality waters, category 3 waters are not high quality waters.

SECTION IV – LISTING LOTS FOR SUBDIVISIONS For the sake of tracking lots that are sold (if a developer chooses to sell lots to another party before the building construction for the lot is completed), and permitted under a different owner (which requires a different permit), developers must list lot numbers.

SECTION V - TYPE OF CONSTRUCTION Check each type of construction that applies to this application.

SECTION VI - BEST MANAGEMENT PRACTICES Check each type of best management practice that will be used to control storm water runoff at the job site.

SECTION VII – GOOD HOUSEKEEPING PRACTICES Check each type of good housekeeping practice that you will use on the site any time during construction activities.

SECTION VIII – ADDITIONAL Provide an estimate of the total number of acres of the site on which soil will be disturbed (to the nearest hundredth of an acre). An email address is required of the best contact associated with the project for the communication needs.

SECTION IX – CERTIFICATION State statutes provide for severe penalties for submitting false information on this application form. State regulations require this application to be signed as follows:

For a corporation: by a responsible corporate officer, which means: (i) president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision making functions, or (ii) the manager of one or more manufacturing, production, or operating facilities employing more than 250 persons or having gross annual sales or expenditures exceeding \$25 million (in second quarter 1980 dollars), if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures;

For a partnership or sole proprietorship: by a general partner or the proprietor; or

For a municipality, state, Federal, or other public facility: by either a principal executive officer or ranking elected official.

POLLUTION PREVENTION PLAN A storm water pollution prevention plan (SWP3) is required to be in hand before the NOI can be submitted. It is important to know SWPPP requirements (contained in the permit) even during the design portion of the project. A copy of the permit can be obtained from the Division of Water Quality's storm water construction web site. Guidance material for developing a SWPPP can be obtained from the Division of Water Quality's storm water construction web site.

V.	TYPE OF CONSTRUCTION (Check all that apply) 1. ☒ Residential 2. ☐ Commercial 3. ☐ Industrial 4. ☐ Road 5. ☐ Bridge 6. ☐ Utility 7. ☐ Contouring, Landscaping 8. ☐ Pipeline 9. ☐ Other (Please list)
VI.	BEST MANAGEMENT PRACTICES Identify proposed Best Management Practices (BMPs) to reduce pollutants in storm water discharges (Check all that apply): 1. ☐ Silt Fence/Straw Wattle/Perimeter Controls 2. ☐ Sediment Pond 3. ☐ Seeding/Preservation of Vegetation 4. ☐ Mulching/Geotextiles 5. ☐ Check Dams 6. ☐ Structural Controls (Berms, Ditches, etc.) 7. ☒ Other (Please list) Wash stations
VII.	GOOD HOUSEKEEPING PRACTICES Identify proposed Good Housekeeping Practices to reduce pollutants in storm water discharges (Check all that apply even if they apply only during a part of the construction time): 1. ☒ Sanitary/Portable Toilet 2. ☒ Washout Areas 3. ☐ Construction Chemicals/Building Supplies Storage Area 4. ☒ Garbage/Waste Disposal 5. ☐ Non-Storm Water 6. ☒ Track Out Controls 7. ☒ Spill Control Measures
VIII.	ADDITIONAL Estimated Area to be Disturbed (in Acres): 0.91 Total Area of Plot (in Acres): 0.91 A storm water pollution prevention plan has been prepared for this site and is to the best of my knowledge in Compliance with State and/or Local Sediment and Erosion Plans and Requirements. Y ☒ N ☐ (A pollution prevention plan is required to be on hand before submittal of the NOI.) Project Start Date: 07/30/2019 Project End Date: 07/30/2020 Enter the best e-mail address to contact the permittee: marshaestokes@gmail.com
IX. CERTIFICATION: I certify under penalty of law that I have read and understand the Part I eligibility requirements for coverage under the general permit for storm water discharges from construction activities. I further certify that to the best of my knowledge, all discharges and BMPs that have been scheduled and detailed in a storm water pollution prevention plan will satisfy requirements of this permit. I understand that continued coverage under this storm water general permit is contingent upon maintaining eligibility as provided for in Part I. I also certify under penalty of law that this document and all attachments were prepared under the direction or supervision of those who have placed their signature(s) below, in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.	
Owner and Operator must sign below: Print Name: Kevin Parkinson Date: 7-30-19	
Title: Owner Signature:	
Print Name: Keeneye Construction Date: 7-30-19	
Title: General Contractor Signature:	
Amount of Permit Fee Enclosed: \$ 150.00	



Utah Department of Environmental Quality

195 North 1950 West
Salt Lake City, Utah 84114-4820
Attn: DAQ, Fugitive Dust Control Plan

Fugitive Dust Control Plan Application

Applicants have the option to complete the online dust control plan on the DEQ Online Services webpage or to submit a hard copy application.

Activities regulated by R307-309 may not commence before obtaining approval of the fugitive dust control plan. Therefore, online filing is encouraged because it provides instant approval.

Blank spaces must be completed for the application to be processed. If not applicable, enter N/A.

1. Applicant Information

Name: Kevin Parkinson
Address: 4891 W 3625 S West Haven, UT 84401
Phone: 8019200552
Email: marshaestokes@gmail.com
Applicant Type: Property Owner

2. Project Information

Project Name: Parkinson Residential Home
Address: 2642 S 4850 W WEBER COUNTY (UNINCORPORATED AREA), UT 84401
County: WEBER
Directions: West of 4700 off of 2550
Acreage: 0.91
Latitude: 41.290833
Longitude: 112.012222

3. Point of Contact

Name: Doug Stokes

Company Name: Keeneye Construction

Address: 4672 Ranch Blvd MORGAN COUNTY (UNINCORPORATED AREA), UT 84050

Phone: 8019419241

Fax:

Cell: 8019419241

4. On-site Superintendent/Supervisor/Foreman Contact

Name: Doug Stokes

Company Name: Keeneye Construction

On-Site Phone: 8019419241

Cell:

5. By signing this permit application I certify that:

A. I am authorized, on behalf of the individual or company listed in Section 1, as Applicant, to apply for a Fugitive Dust Control Plan and to commit to all of the terms and conditions of the requested plan.

B. Construction activities will be limited to lands that the applicant either owns or is authorized to use for construction activities.

C. The applicant accepts responsibility for assuring that all contractors, subcontractors, and all other persons on the construction site covered by this plan, comply with the terms and conditions of the Fugitive Dust Control Plan.

D. I understand that any false material statement, representation or certification made in this application may invalidate the plan or cause me to be subject to enforcement action pursuant to Utah Code Ann. 19-2-115.

E. Failure to comply with fugitive dust rules may result in compliance action and penalties up to \$10,000 per violation/day.

Date: 07/30/2019

Printed Name: Kevin Parkinson

Title: Property Owner

Company Name: Keeneye Construction

Dust Plan Number: 21383

Dust Suppressants

	Check All that Apply
	Clay additives.
	Calcium chloride.
	Lime (calcium oxide).
	Magnesium chloride.
	Organic non-petroleum products, (ligninsulfonate, tall (pine) oil, and vegetable derivatives).
	Synthetic polymers (for example; polyvinyl acetate and vinyl acrylic).

FUGITIVE DUST CONTROL PLAN

PROJECT ACTIVITIES CHECKLIST INSTRUCTIONS:

PLACE A CHECK MARK NEXT TO EVERY ACTIVITY THAT WILL BE CONDUCTED ON THIS SITE, FOR EACH CHECKED ACTIVITY, COMPLETE THE CORRESPONDING CONTROL MEASURES/BEST MANAGEMENT PRACTICE (BMP) SELECTION PAGE. WHEN COMPLETED, YOU WILL HAVE THE OPTION TO PRINT THE ENTIRE PLAN.

	Project Activity	Check All that Apply
01	Backfilling area previously excavated or trenched.	X
02	Blasting soil & rock - drilling and blasting.	
03	Clearing for site preparation and vacant land cleanup.	X
04	Clearing forms, foundations, slab clearing and cleaning of forms, foundations and slabs prior to pouring concrete.	X
05	Crushing of construction and demolition debris, rock and soil.	
06	Cut and fill soils for site grade preparation.	
07	Demolition - Implosive demolition of a structure, using explosives.	
08	Demolition - mechanical/manual demolition of walls, stucco, concrete, freestanding structures, buildings and other structures.	
09	Disturbed soil throughout project including between structures. THIS ACTIVITY MUST BE SELECTED FOR ALL PROJECTS.	X
10	Disturbed land - long term stabilization and erosion control of large tracts of disturbed land that will not have continuing activity for more than 30 days.	
11	Hauling materials.	
12	Paving/subgrade preparation for paving streets, parking lots, etc.	
13	Sawing/cutting material, concrete, asphalt, block or pipe.	
14	Screening of rock, soil or construction debris.	
15	Staging areas, equipment storage, vehicle parking lots, and material storage areas.	
16	Stockpiles materials (storage), other soils, rock or debris, for future use or export.	
17	Tailings piles, ponds and erosion control.	

18	Trackout Prevention and Cleanup of mud, silt and soil tracked out onto paved roads.	X
19	Traffic - unpaved routes and parking, construction related traffic on unpaved interior and/or access roads and unpaved employee/worker parking areas.	X
20	Trenching with track or wheel mounted excavator, shovel, backhoe or trencher.	X
21	Truck loading with materials including construction and demolition debris, rock and soil.	X

Backfilling area previously excavated or trenched.

BMP 01

GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN R307-309-5

MAKE AT LEAST ONE SELECTION FROM EACH SECTION.

Stabilize backfill material when not actively handling.

☒ 01-01	Water backfill material to maintain moisture or to form crust.
☐ 01-02	Apply and maintain a chemical stabilizer to backfill material to form crust.
☐ 01-03	Cover (natural or synthetic) or enclose backfill material when not actively handling.

Stabilize backfill material during handling.

☒ 01-04	Empty loader bucket slowly and minimize drop height from loader bucket.
☐ 01-05	Dedicate water truck or large hose to backfilling equipment and apply water as needed.
☐ 01-06	Mix moist soil with dry soil until the optimum moisture is reached.
☐ 01-07	Apply and mix water into the backfill material until optimum moisture is reached.
☐ 01-08	Apply and mix water and chemical solution into the backfill material until optimum moisture is reached.

Stabilize soil at completion of backfilling activity.

☒ 01-09	Apply water and maintain disturbed soils in a stable condition.
☐ 01-10	Apply and maintain a chemical stabilizer on disturbed soils to form a crust.

Stabilize material while using pipe padder equipment.

☐ 01-11	Mix moist soil with dry soil until the optimum moisture is reached.
☐ 01-12	Dedicate water truck or large hose to equipment and apply water as needed.
☒ 01-13	Not Applicable

Clearing for site preparation and vacant land cleanup.

BMP 03

GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN R307-309-5

MAKE AT LEAST ONE SELECTION FROM EACH SECTION.

Stabilize surface soils where support equipment and vehicles will operate.

☒ 03-01 Pre-water and maintain surface soils in a stabilized condition.

☐ 03-02 Apply and maintain a chemical stabilizer on surface soils.

Stabilize disturbed soil immediately after clearing and grubbing activities.

☒ 03-03 Water disturbed soils to form crust.

☐ 03-04 Apply and maintain a chemical stabilizer on disturbed soils to form crust.

Stabilize slopes at completion of activity.

☐ 03-05 Stabilize sloping surfaces using soil binders until vegetation or ground cover can effectively stabilize the slope.

☒ 03-06 Apply water and maintain sloping surfaces/wind breaks in a crusted condition.

Clearing forms, foundations, slab clearing and cleaning of forms, foundations and slabs prior to pouring concrete.

BMP 04

GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN R307-309-5

MAKE AT LEAST ONE SELECTION.

☐ 04-01

Use water spray to clear forms, foundations and slabs.

☒ 04-02

Use sweeping and water spray to clear forms, foundations and slabs.

☐ 04-03

Use industrial vacuum to clear forms, foundations and slabs prior to the use of high pressure air to blow soil and debris.

☐ 04-04

Use industrial vacuum to clear forms, foundations and slabs.

**Disturbed soil throughout project including between structures. THIS
ACTIVITY MUST BE SELECTED FOR ALL PROJECTS.**

BMP 09

**GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN
R307-309-5**

MAKE AT LEAST ONE SELECTION FROM EACH SECTION.

Limit disturbance of soils where possible.

- | | |
|---|---|
| ☐ 09-01 | Limit disturbance of soils with the use of fencing, barriers, barricades, and/or wind barriers. |
| ☒ 09-02 | Limit vehicle mileage and reduce speed. |

Stabilize and maintain stability of all disturbed soil throughout construction site.

- | | |
|---|--|
| ☒ 09-03 | Apply water to stabilize disturbed soils. Soil moisture must be maintained such that soils can be worked without generating fugitive dust. |
| ☐ 09-04 | Apply and maintain a chemical stabilizer. |
| ☐ 09-05 | Use wind breaks. |
| ☐ 09-06 | Apply cover (natural or synthetic). |

Trackout Prevention and Cleanup of mud, silt and soil tracked out onto paved roads.

BMP 18

GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN R307-309-5

MAKE AT LEAST ONE SELECTION FROM EACH SECTION.

Prevent dust from trackout.

☐ 18-01	Clean trackout at the end of the work shift from paved surfaces to maintain dust control
☒ 18-02	Maintain dust control during working hours and clean trackout from paved surfaces at the end of the work shift/day.
☐ 18-03	Install gravel pad(s), clean, well-graded gravel or crushed rock. Minimum dimensions must be 30 feet wide by 3 inches deep, and, at minimum, 50' or the length of the longest haul truck, whichever is greater. Re-screen, wash or apply additional rock in gravel pad to maintain effectiveness.
☐ 18-04	Install wheel shakers. Clean wheel shakers on a regular basis to maintain effectiveness.
☐ 18-05	Install wheel washers. Maintain wheel washers on a regular basis to maintain effectiveness.
☐ 18-06	Motorized vehicles will only operate on paved surfaces.
☐ 18-07	Install cattle guard before paved road entrance.

All exiting traffic must be routed over selected trackout control device(s).

☐ 18-08	Clearly establish and enforce traffic patterns to route traffic over selected trackout control device(s).
☒ 18-09	Limit site accessibility to routes with trackout control devices in place by installing effective barriers on unprotected routes.

Traffic - unpaved routes and parking, construction related traffic on unpaved interior and/or access roads and unpaved employee/worker parking areas.

BMP 19

GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN R307-309-5

MAKE AT LEAST ONE SELECTION.

Stabilize surface soils where support equipment and vehicles will operate.

☒ 19-01	Limit vehicle mileage and speeds.
☒ 19-02	Apply and maintain water on surface soils.
☐ 19-03	Apply and maintain chemical stabilizers on surface soils.
☐ 19-04	Apply and maintain gravel on surface soils.
☐ 19-05	Supplement chemical stabilizers, water or aggregate applications as necessary.
☐ 19-06	Apply recycled asphalt (RAP) to surface soils.

Trenching with track or wheel mounted excavator, shovel, backhoe or trencher.

BMP 20

GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN R307-309-5

MAKE AT LEAST ONE SELECTION FROM EACH SECTION.

Presoak soils prior to trenching activities.

☒ 20-01

Pre-water surface.

Stabilize surface soils where trenching equipment, support equipment and vehicles will operate.

☒ 20-02

Pre-water and maintain surface soils in a stabilized condition.

☐ 20-03

Apply and maintain a chemical stabilizer to surface soils.

☐ 20-04

Limit mileage and speed.

Stabilize soils after trenching.

☒ 20-05

Apply and maintain water on excavated soil.

☐ 20-06

Apply and maintain chemical stabilizer on excavated soil.

Truck loading with materials including construction and demolition debris,
rock and soil.

BMP 21

**GENERAL REQUIREMENT: ALL ACTIVITIES MUST MEET OPACITY REQUIREMENTS IN
R307-309-5**

MAKE AT LEAST ONE SELECTION.

☒ 21-01

Pre-water and maintain surface soils in a stabilized condition where loaders,
support equipment and vehicles will operate.

☐ 21-02

Apply and maintain a chemical stabilizer on surface soils where loaders,
support equipment and vehicles will operate.

☒ 21-03

Empty loader bucket slowly and keep loader bucket close to the truck to
minimize the drop height while dumping.

Credit Card Payment Receipt

Your payment was successfully processed.

Please print this page as a receipt for your records.

Item	Quantity	Item Amount	Total
Common Plan Permit Kevin Parkinson	1	\$150.00	\$150.00
Total Amount:			\$150.00

Payment Processing Details

Order Number: UTRH95113
Date of Transaction: 07/30/2019
Amount Charged: \$150.00
Name on Card: Marshae Stokes
Credit Card Number: *****3733
Credit Card Type: Visa

APPENDIX C: Notice of Intent and Termination.

Find the Notice of Termination Form at

<https://deq.utah.gov/Permits/water/updes/stormwatercon.htm>

However, termination of the project can be done on-line at <https://secure.utah.gov/stormwater>

(You must log in using the same username that you applied for your NOI with. If you completed a paper NOI you must complete a paper NOT.)

APPENDIX D: Daily Self-Inspection Log (permit part 3.2.2).

[illegible]

APPENDIX E: Inspection Reports

an Template (SWPPP)
Common Plan Permit

Include BMPs inspected even if they are in good condition. Corrections must be completed before the next weekly inspection.

[illegible]

APPENDIX F: Additional Information

For permits such as local permits, dewatering, stream alteration, wetland, and out of date SWPPP documents, delegation of authority forms, etc.

Storm Water Pollution Prevention Plan Template (SWPPP)
Common Plan Permit

Delegation of Authority

I, Doug Stokes (name), hereby designate the person or specifically described position below to be a duly authorized representative for the purpose of overseeing compliance with environmental requirements, including the Common Plan Permit, at the Parkinson Residential Home construction site. The designee is authorized to sign any reports, storm water pollution prevention plans and all other documents required by the permit.

Doug Stokes (contractor) Mathue Earl (contractor) (name of person or position)

Keeneye Construction (company)

4672 Ranch Blvd. (address)

Mountain Green, UT 84050 (city, state, zip)

801-941-9241 801-845-8009 (phone)

By signing this authorization, I confirm that I meet the requirements to make such a designation as set forth in UTR495113 (Reference State Permit), and that the designee above meets the definition of a "duly authorized representative" as set forth in UTR495113 (Reference State Permit).

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Name: Douglas Stokes

Company: Keeneye Construction

Title: Owner

Signature:

Date:

8.5.19

APPENDIX G: BMP Specifications and Details

Please see attached sheets describing BMP's being used for this project.

**DESCRIPTION:**

Dust control measures are used to stabilize soil from wind erosion, and reduce dust by construction activities.

APPLICATION:

- ▶ Dust control is useful in any process area, loading and unloading area, material handling areas, and transfer areas where dust is generated. Street sweeping is limited to areas that are paved.

INSTALLATION/APPLICATION CRITERIA:

- ▶ Mechanical dust collection systems are designed according to the size of dust particles and the amount of air to be processed. Manufacturers' recommendations should be followed for installation (as well as the design of the equipment).
- ▶ Two kinds of street sweepers are common: brush and vacuum. Vacuum sweepers are more efficient and work best when the area is dry.
- ▶ Mechanical equipment should be operated according to the manufacturers' recommendations and should be inspected regularly.

LIMITATIONS:

- ▶ Is generally more expensive than manual systems.
- ▶ May be impossible to maintain by plant personnel (the more elaborate equipment).
- ▶ Is labor and equipment intensive and may not be effective for all pollutants (street sweepers).

MAINTENANCE:

- ▶ If water sprayers are used, dust-contaminated waters should be collected and taken
- ▶ for treatment. Areas will probably need to be resprayed to keep dust from
- ▶ spreading.

OBJECTIVES

- ☒ Housekeeping Practices
- ☐ Contain Waste
- ☒ Minimize Disturbed Areas
- ☒ Stabilize Disturbed Areas
- ☐ Protect Slopes/Channels
- ☐ Control Site Perimeter
- ☐ Control Internal Erosion



WEBER COUNTY

ENGINEERING DEPARTMENT

2380 Washington Blvd., Suite 240
Ogden, UT 84401
(801) 399-8374

TARGETED POLLUTANTS


- ☒ Sediment
- ☐ Nutrients
- ☐ Toxic Materials
- ☐ Oil & Grease
- ☐ Floatable Materials
- ☐ Other Waste

- ☒ High Impact
- ☒ Medium Impact
- ☐ Low or Unknown Impact

IMPLEMENTATION REQUIREMENTS

- ☒ Capital Costs
- ☐ O&M Costs
- ☒ Maintenance
- ☒ Training

- ☒ High
- ☒ Medium
- ☐ Low

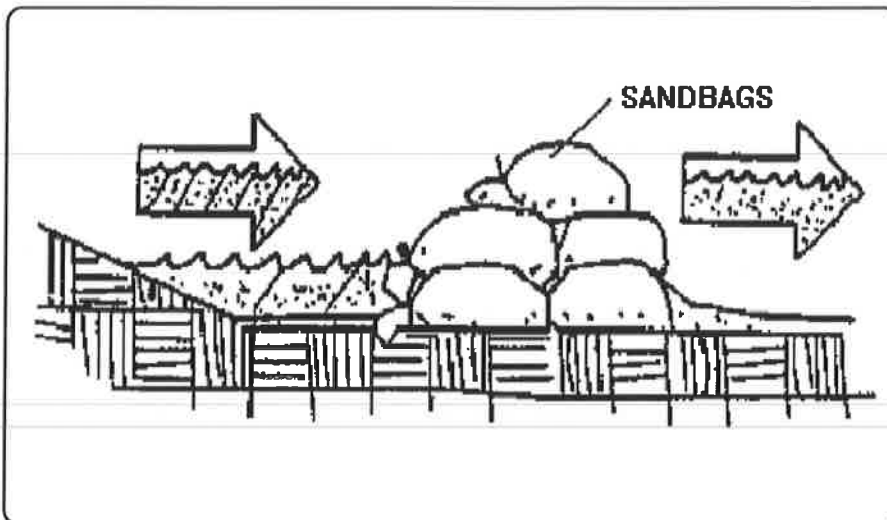

DESCRIPTION:

Stacking sand bags along a level contour creates a barrier which detains sediment laden water, ponding water upstream of the barrier and promoting sedimentation.

APPLICATION:

- ▶ Along the perimeter of the site.
- ▶ May be used in drainage areas up to 5 acres.
- ▶ Along streams and channels
- ▶ Across swales with small catchments.
- ▶ Around temporary spoil areas.
- ▶ Below the toe of a cleared slope.

INSTALLATION/APPLICATION CRITERIA:

- ▶ Install along a level contour.
- ▶ Base of sand bag barrier should be at least 48 inches wide.
- ▶ Height of sand bag barrier should be at least 18 inches high.
- ▶ 4 inch PVC pipe may be installed between the top layers of sand bags to drain large flood flows.
- ▶ Provide area behind barrier for runoff to pond and sediment to settle.
- ▶ Place below the toe of a slope.

LIMITATIONS:

- ▶ Sand bags are more expensive than other barriers, but also more durable.
- ▶ Burlap should not be used.

MAINTENANCE:

- ▶ Inspect after each rain.
- ▶ Reshape or replace damaged sand bags immediately.
- ▶ Replace sediment when it reaches six inches in depth.

OBJECTIVES

- ☐ Housekeeping Practices
- ☐ Contain Waste
- ☐ Minimize Disturbed Areas
- ☐ Stabilize Disturbed Areas
- ☒ Protect Slopes/Channels
- ☒ Control Site Perimeter
- ☒ Control Internal Erosion



WEBER COUNTY

ENGINEERING DEPARTMENT

2380 Washington Blvd., Suite 240
Ogden, UT 84401
(801) 399-8374

TARGETED POLLUTANTS


- ☒ Sediment
- ☐ Nutrients
- ☐ Toxic Materials
- ☐ Oil & Grease
- ☐ Floatable Materials
- ☐ Other Waste

- ☒ High Impact
- ☒ Medium Impact
- ☐ Low or Unknown Impact

IMPLEMENTATION REQUIREMENTS

- ☒ Capital Costs
- ☐ O&M Costs
- ☐ Maintenance
- ☐ Training

- ☒ High
- ☒ Medium
- ☐ Low

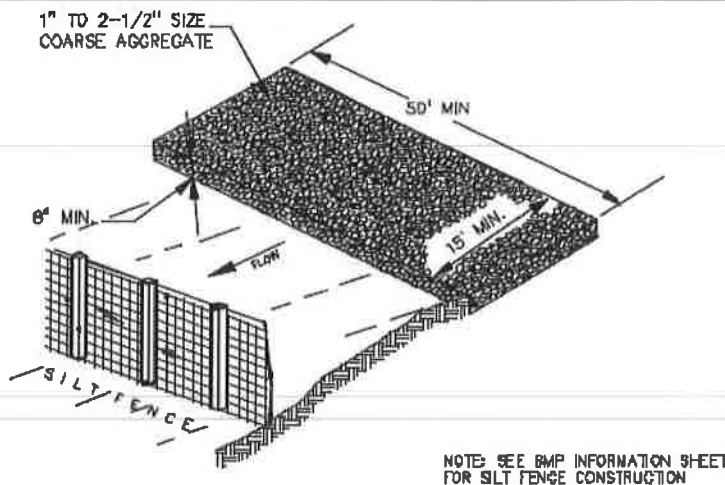

DESCRIPTION:

A stabilized pad of crushed stone for general washing of equipment and construction vehicles.

APPLICATION:

- ▶ At any site where regular washing of vehicles and equipment will occur. May also be used as a filling point for water trucks limiting erosion caused by overflow or spillage of water.

INSTALLATION/APPLICATION CRITERIA:

- ▶ Clear and grub area and grade to provide maximum slope of 1%
- ▶ Compact subgrade and place filter fabric if desired (recommended for wash areas to remain in use for more than 3 months).
- ▶ Place coarse aggregate, 1 to 2-1/2 inches in size, to a minimum depth of 8-inches.
- ▶ Install silt fence downgradient (see silt fence BMP information sheet).

LIMITATIONS:

- ▶ Cannot be utilized for washing equipment or vehicles that may cause contamination of runoff such as fertilizer equipment or concrete equipment. Solely used to control sediment in wash water.

MAINTENANCE:

- ▶ Inspect daily for loss of gravel or sediment buildup.
- ▶ Inspect adjacent area for sediment deposit and install additional controls as necessary.
- ▶ Repair area and replace gravel as required to maintain control in good working condition.
- ▶ Expand stabilized area as required to accommodate activities.
- ▶ Maintain silt fence as outlined in specific silt fence BMP information sheet.

OBJECTIVES

- ☒ Housekeeping Practices
- ☐ Contain Waste
- ☐ Minimize Disturbed Areas
- ☐ Stabilize Disturbed Areas
- ☐ Protect Slopes/Channels
- ☐ Control Site Perimeter
- ☒ Control Internal Erosion



WEBER COUNTY

ENGINEERING DEPARTMENT

2380 Washington Blvd., Suite 240
Ogden, UT 84401
(801) 399-8374

TARGETED POLLUTANTS


- ☒ Sediment
- ☐ Nutrients
- ☒ Toxic Materials
- ☒ Oil & Grease
- ☐ Floatable Materials
- ☐ Other Waste

- ☒ High Impact
- ☒ Medium Impact
- ☐ Low or Unknown Impact

IMPLEMENTATION REQUIREMENTS

- ☒ Capital Costs
- ☐ O&M Costs
- ☒ Maintenance
- ☐ Training

- ☒ High
- ☒ Medium
- ☐ Low

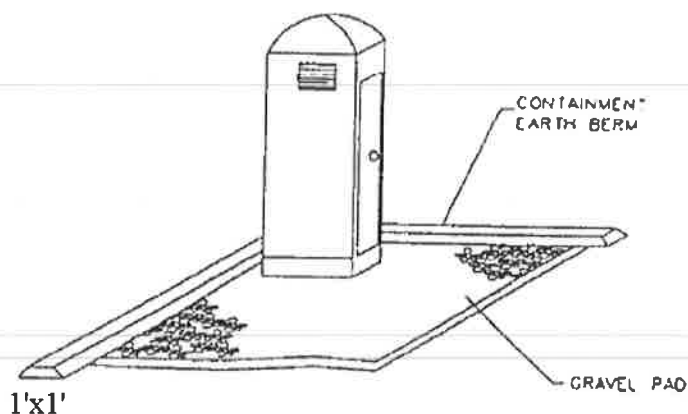

DESCRIPTION:

Temporary on-site sanitary facilities for construction personnel.

APPLICATION:

- ▶ All sites with no permanent sanitary facilities or where permanent facility is too far from activities.

INSTALLATION/APPLICATION CRITERIA:

- ▶ Locate portable toilets in convenient locations throughout the site.
- ▶ Prepare level, gravel surface and provide clear access to the toilets for servicing and for on-site personnel.
- ▶ Construct earth berm perimeter (See Earth Berm Barrier Information Sheet), control for spill/protection leak.

LIMITATIONS:

No limitations.

MAINTENANCE:

- ▶ Portable toilets should be maintained in good working order by licensed service with daily observation for leak detection.
- ▶ Regular waste collection should be arranged with licensed service.
- ▶ All waste should be deposited in sanitary sewer system for treatment with appropriate agency approval.

OBJECTIVES

- ☒ Housekeeping Practices
- ☒ Contain Waste
- ☐ Minimize Disturbed Areas
- ☐ Stabilize Disturbed Areas
- ☐ Protect Slopes/Channels
- ☐ Control Site Perimeter
- ☐ Control Internal Erosion



WEBER COUNTY

ENGINEERING DEPARTMENT

2380 Washington Blvd., Suite 240
Ogden, UT 84401
(801) 399-8374

TARGETED POLLUTANTS

- ☐ Sediment
- ☐ Nutrients
- ☐ Toxic Materials
- ☐ Oil & Grease
- ☐ Floatable Materials
- ☒ Other Construction Waste

- ☒ High Impact
- ☒ Medium Impact
- ☐ Low or Unknown Impact

IMPLEMENTATION REQUIREMENTS

- ☒ Capital Costs
- ☒ O&M Costs
- ☒ Maintenance
- ☐ Training

- ☒ High
- ☒ Medium
- ☐ Low

**DESCRIPTION:**

Practices to clean-up leakage/spillage of on-site materials that may be harmful to receiving waters.

APPLICATION:

- All sites

GENERAL:

- Store controlled materials within a storage area.
- Educate personnel on prevention and clean-up techniques.
- Designate an Emergency Coordinator responsible for employing preventative practices and for providing spill response.
- Maintain a supply of clean-up equipment on-site and post a list of local response agencies with phone numbers.

METHODS:

- Clean-up spills/leaks immediately and remediate cause.
- Use as little water as possible. NEVER HOSE DOWN OR BURY SPILL CONTAMINATED MATERIAL.
- Use rags or absorbent material for clean-up. Excavate contaminated soils. Dispose of clean-up material and soil as hazardous waste.
- Document all spills with date, location, substance, volume, actions taken and other pertinent data.
- Contact local Fire Department and State Division of Environmental Response and Remediation (Phone #536-4100) for any spill of reportable quantity.

OBJECTIVES

- ☒ Housekeeping Practices
- ☒ Contain Waste
- ☐ Minimize Disturbed Areas
- ☐ Stabilize Disturbed Areas
- ☐ Protect Slopes/Channels
- ☐ Control Site Perimeter
- ☐ Control Internal Erosion

**WEBER COUNTY****ENGINEERING DEPARTMENT**

2380 Washington Blvd., Suite 240
Ogden, UT 84401
(801) 399-8374

TARGETED POLLUTANTS

- ☐ Sediment
- ☐ Nutrients
- ☒ Toxic Materials
- ☒ Oil & Grease
- ☐ Floatable Materials
- ☐ Other Construction Waste

- ☒ High Impact
- ☒ Medium Impact
- ☐ Low or Unknown Impact

IMPLEMENTATION REQUIREMENTS

- ☒ Capital Costs
- ☐ O&M Costs
- ☐ Maintenance
- ☒ Training

- ☒ High
- ☒ Medium
- ☐ Low