

REV	DESCRIPTION	DWN	CHK	APP
1	REVISED P/N: CAP3	M.E.	JDM	H.A.
2	DATE: 3/10/2009			
3	REVISED FILE NO.	M.E.	JDM	H.A.
	DATE: 3/10/2009			

FILE NO. STANDARD-TX

FABRICATION TOLERANCES

1) HOLE DIM. UNDER 1.0" ± .005" (1mm)
 2) HOLE DIM. 1.0" & GREATER ± .005" (1.5mm)
 3) HOLE DIM. 1.0" & GREATER ± .006" (1.5mm)
 4) HOLE LOCATION ± .005" (1.0mm)
 5) CENTER HOLE DIM. ± .005" (1.0mm)
 6) CENTER HOLE DIM. FOR LANCES ± .005" (1.0mm)
 7) CENTER HOLE DIM. FOR LANCES ± .006" (1.5mm)
 8) WIDTH/OUTSIDE DIM. TOLERANCE DISTANCE ± .005" (1.0mm)

NOTES:

HOLES MAY BE FINISHED, UNLESS OTHERWISE SPECIFIED. ALL DIMENSIONS ARE UNLESS OTHERWISE INDICATED ON FABRICATION DRAWING. DIMENSIONS INDICATED IN PARENTHESIS ARE FOR INFORMATION ONLY.

6718 WEST PLANK ROAD
 PEORIA, IL 61604
 TOLL FREE 800-727-ROHN


ROHN
 PRODUCTS

THIS DRAWING IS THE PROPERTY OF ROHN. IT IS NOT TO BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF ROHN.

TX LINE BRIDGE
 10' SINGLE W/G BRIDGE


DWN: M.F. JDM DATE: Jun/10/2009
 ENGR: H.A.
 DRAWING NO: WGBS121014 REV: 2

ITEM	QTY	PART NO.	DESCRIPTION
1	1	GS1210G	PANEL W/G BR 1.0X10' HDG
2	2	KH8086	PIPE 3.50DX.2.16XW/L4" HDG
3	2	CAP3	CAP 3" FOR WAVEGUIDE POST
4	2	VY7246	ANGLE SUPP L2.5X.25X4.57 HDG
5	2	VY7244	ANGLE SUPP L2.5X.25X5.57 HDG
6	9	VY7243	ANGLE SUPP L1.75X.13X10.26 HDG
7	26	WY3723	PLATE WASHER 7GA1.5X3" 44"
8	2	210005GA	BOLT ASSY 3/8 X 1-1/4 HCS G5
9	6	210090G	THREADED ROD 3/8X24" HDG
10	4	JR88A	U-BOLT ASSY 1/2 X 3-1/2
11	4	210016GA	BOLT ASSY 1/2 X 1-1/2 HSB A325
12	60	230005	NUT Hvy HEX 3/8 GR 2H HDG
13	12	110159	Nut 3/8 (Jam. Pal) HDG
14	4	210009GA	BOLT ASSY 3/8 X 2 HCS G5
15	2	VY7247	ANGLE SUPP L1.5X.13X10.27 HDG

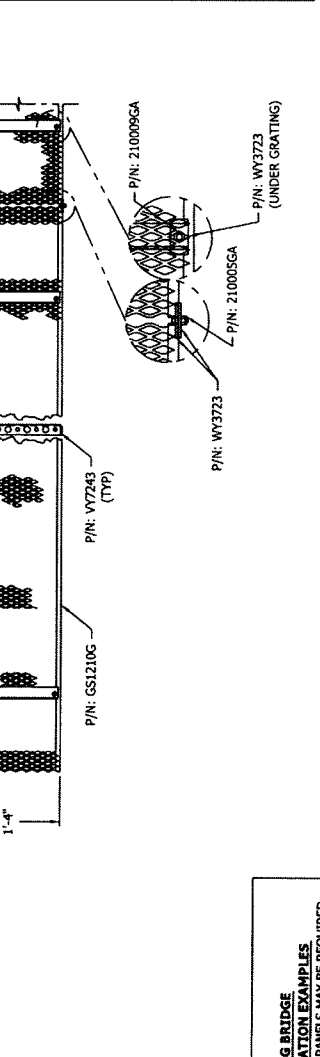

W/G BRIDGE CONFIGURATION EXAMPLES

FIELD CUTTING OF PANELS MAY BE REQUIRED. ALL FIELD CUTTING MUST BE REPAIRED WITH COLD GALV. OR ZINC-RICH PAINT



ASSEMBLY P/N: WGBS121014

NOTE: THIS ASSEMBLY IS NOT DESIGNED TO SUPPORT PERSONNEL OR EQUIPMENT